

Low-Intensity-Low-Temperature Stability Assessment of Perovskite Solar Cells Operating on Simulated Martian Surface Conditions

Mengjie Sun^{a,b}, Yifan Zheng^{*b,c}, Yifeng Shi^b, Guodong Zhang^{b,c}, Yuchuan Shao^{*a,b,c}

^a *School of Physics and Optoelectronic Engineering, Hangzhou Institute for Advanced Study, UCAS; 310024, Hangzhou, China*

^b *Key Laboratory of Materials for High-Power Laser, Shanghai Institute of Optics and Fine Mechanics, Chinese Academy of Sciences; 201800, Shanghai, China*

^c *Center of Materials Science and Optoelectronics Engineering, University of Chinese Academy of Sciences; 100049, Beijing, China*

Correspondence to: Prof. Yifan Zheng, Prof. Yuchuan Shao

Email: yifan.zheng@siom.ac.cn; shaoyuchuan@siom.ac.cn

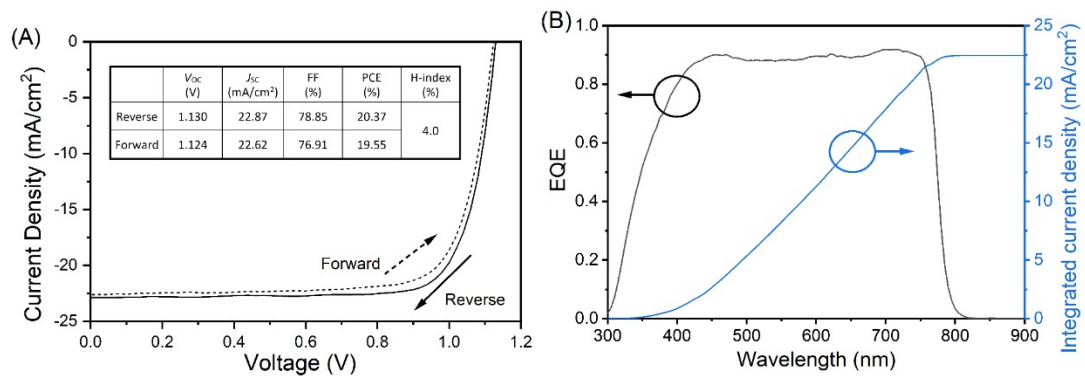


Fig. S1 (A) J - V characteristics and (B) EQE spectra of PSCs in a glovebox under room temperature and AM1.5G illumination

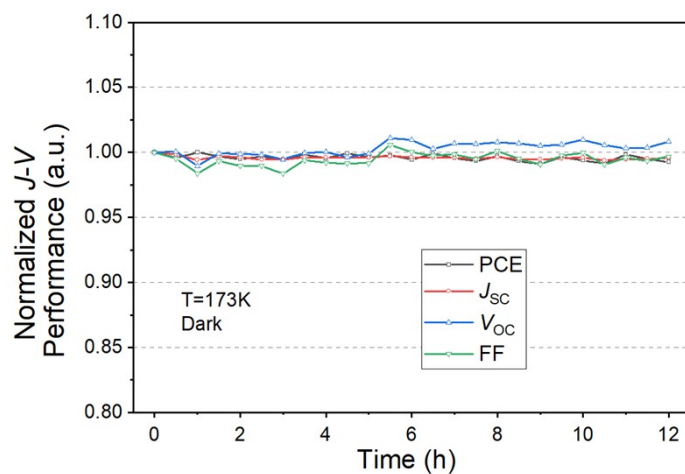


Fig. S2 (A) Normalized J - V performance of non-encapsulated devices under simulated Martian nighttime (173 K dark). It is dark most of the time, except when J - V measurement is in progress.