

Supporting Information for:

Evaluation of Functional Layers Thinning of High Temperature Polymer Electrolyte Membrane Fuel Cells after Long Term Operation

Miquel Vega Paredes^{1,+}, Alba Garzón Manjón^{1,+,*}, Bjoern Hill^{1,§}, Torsten Schwarz¹, Nicolas A. Rivas¹, Tilman Jurzinsky², Katharina Hengge², Florian Mack², Christina Scheu^{1*}

¹ Max-Planck-Institut für Eisenforschung GmbH, Max-Planck-Straße 1, 40237 Düsseldorf,
Germany.

² Freudenberg Fuel Cell e-Power Systems GmbH, Bayerwaldstraße 3, 81737 München,
Germany.

+ Equal contribution

§ Present address: Physical Chemistry II department. Faculty of chemistry and
biochemistry, Ruhr Universität Bochum, Universitätsstraße 150, 44801 Bochum , Germany.

Corresponding authors*: a.garzon@mpie.de

c.scheu@mpie.de

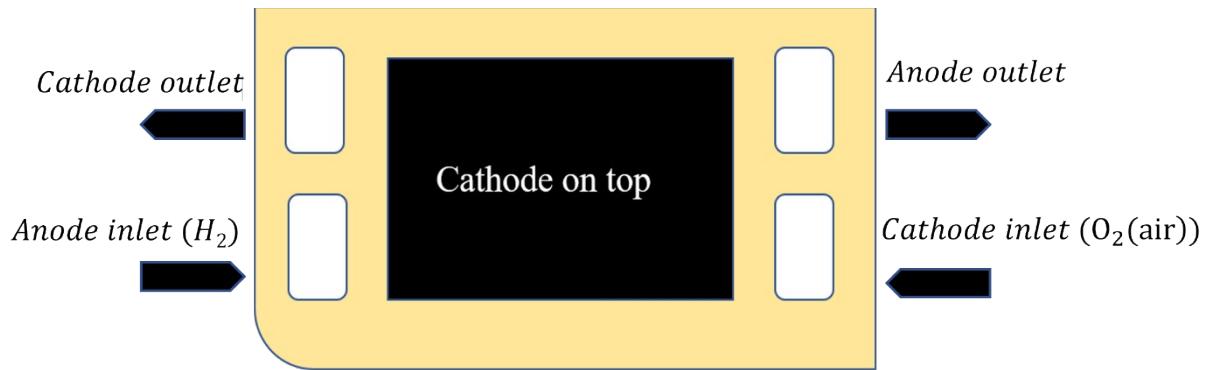


Figure SII: Top view scheme of HT-PEMFC. O_2 is feed from top (cathode) and H_2 is feed from bottom (anode). The gas in-/out-let pipes are through the cutouts in the frame (left and right).

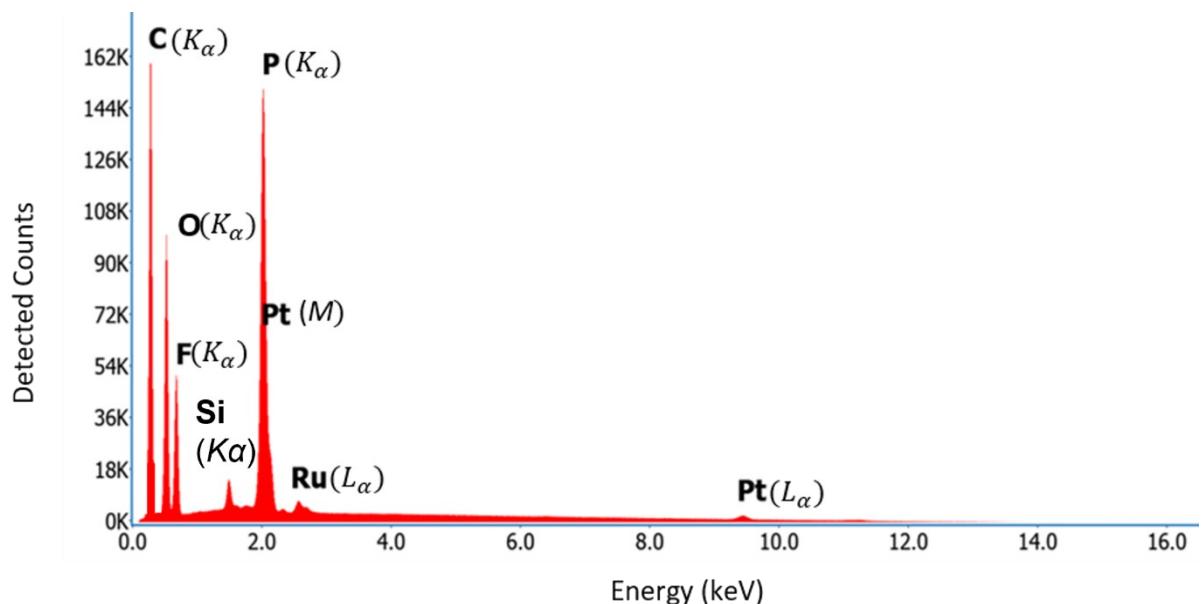


Figure SI2: EDX spectrum of HT_non_operated cell shows the presence of C, O, F, P, Pt and Ru.

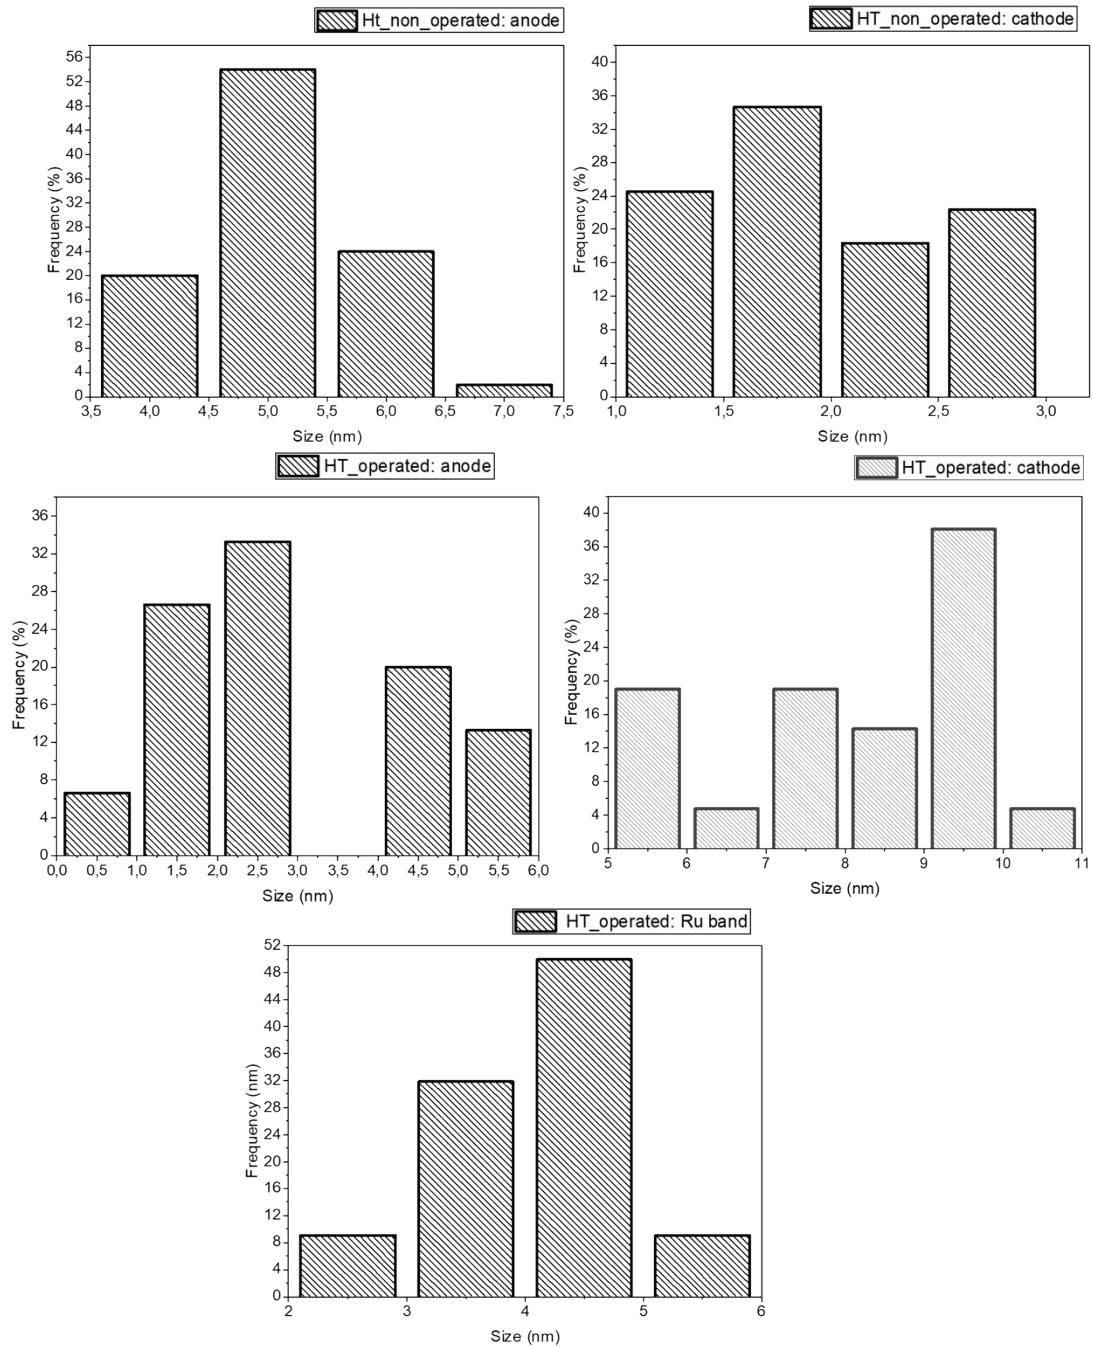


Figure SI3: Size distribution of the catalytic nanoparticles before and after operation.