

Supporting Information

Optical fiber temperature sensor of Er³⁺/Yb³⁺ codoped LaGaO₃ microcrystals with high reliability and stability

Haibo Xu,¹ Yanbang Lian,^{2*} Zhanling Lu,¹ Ilya Kolesnikov,³ Yingjie Zhao,⁴ Kun He,⁴ Zewen Su,⁴ Gongxun Bai,^{4*} Shiqing Xu⁴

¹*College of Materials Science and Engineering, Zhengzhou University, Zhengzhou 450001, Henan, China*

²*Radiology Department, The First Affiliated Hospital of Zhengzhou University, Zhengzhou University, Zhengzhou 450000, China*

³*Center for Optical and Laser Materials Research, St. Petersburg State University, Uljanovskaya 5, St. Petersburg, Russia*

⁴*Key Laboratory of Rare Earth Optoelectronic Materials and Devices of Zhejiang Province, China Jiliang University, Hangzhou 310018, China*

*Corresponding author. E-mail: lybang0507@126.com (Y Lian), baigx@cjlu.edu.cn (G Bai)

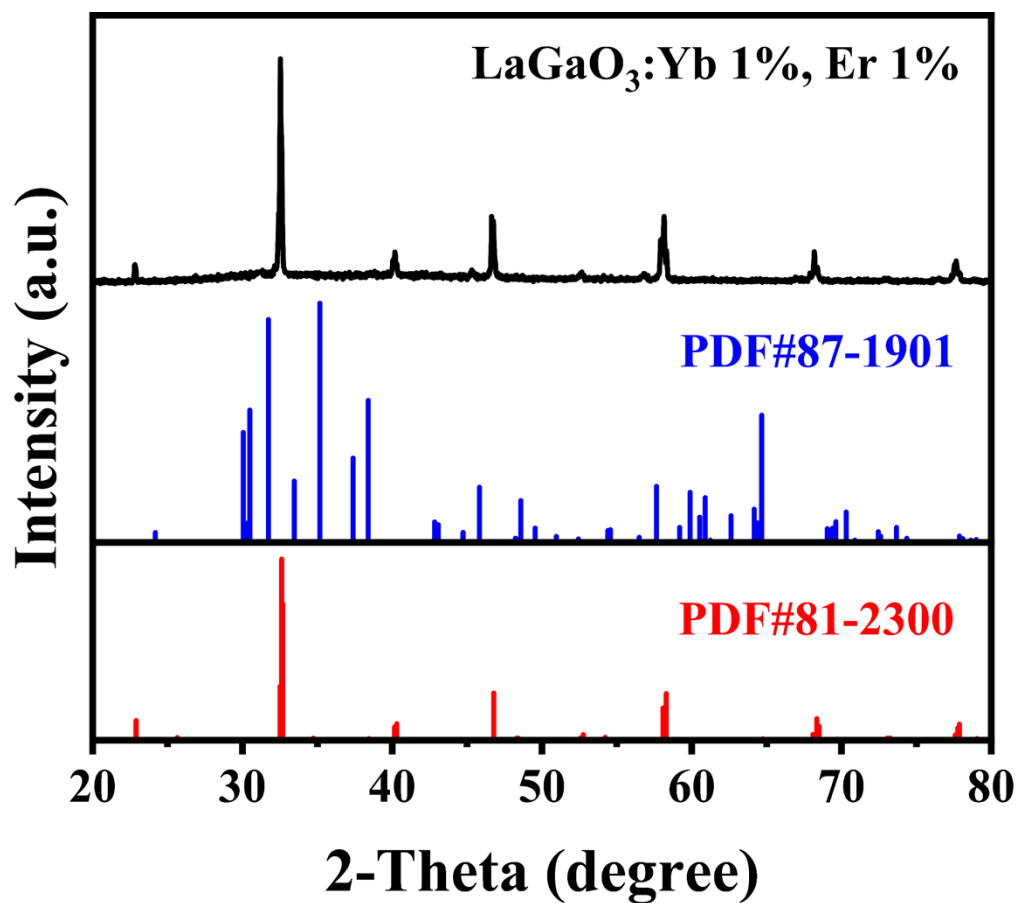


Figure S1. The XRD patterns of LaGaO₃:1% Yb, 1% Er and standard pattern (PDF# 81-2300 LaGaO₃) and (PDF# 87-1901 Ga₂O₃).