Electronic Supplementary Material (ESI) for Analytical Methods. This journal is © The Royal Society of Chemistry 2024

Electrochemical sensor for the determination of environmentally hazardous fungicide pyrimethanil in water and fruit samples

Chou-Yi Hsu ^{a,*}, Tariq J. Al-Musawi ^b, Rahim Lataef ^c, Holya A. Lafta ^d, Dalal Abdullah Fatthi^e, Ahmed S. Abed ^f, Salema K. Hadrawi ^{g,*}, Maysm Barzan Talb ^h, Irfan Ahmad ⁱ, Safia Obaidur Rab ⁱ, Mohammad Y. Alshahrani ⁱ

- ^a Department of Pharmacy, Chia Nan University of Pharmacy and Science, Tainan City 71710, Taiwan.
- ^b Building and Construction Techniques Engineering Department, Al-Mustaqbal University College, 51001 Hillah, Babylon, Iraq.
- ^c College of Medical Technology/ Al-Farahidi University/ Iraq
- ^d Al-Nisour University College/Baghdad/Iraq
- ^e Department of Medical Laboratory Technics, AlNoor University College, Bartella, Iraq
- f Hilla University college, Babylon, Iraq/Department of Prosthetic Dental Technology/Iraq
- ⁸ Refrigeration and Air-conditioning Technical Engineering Department, College of Technical Engineering, The Islamic University, Najaf, Iraq
- ^h Mazaya University College/Iraq
- ⁱ Department of Clinical Laboratory Sciences, College of Applied Medical Sciences, King Khalid University, Abha, Saudi Arabia

*Corresponding Authors: Email: drchouyihsu@gmail.com, sahadrawi@gmail.com

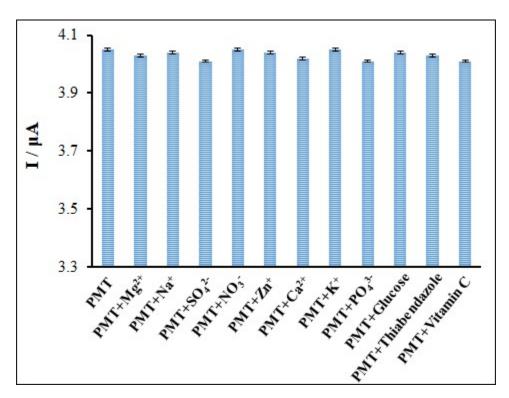


Figure S1. The oxidation current diagram of modified electrode in the presence of 50.0 μ M PMT in PBS (0.1 M, pH 4) and other investigated interferences.

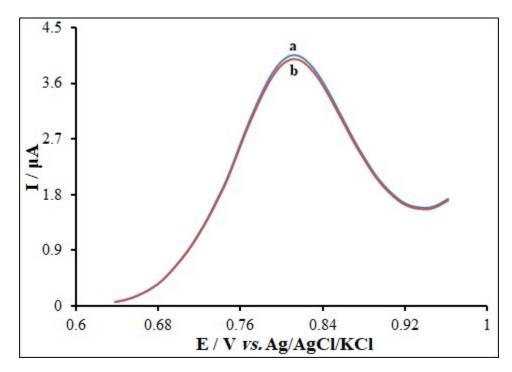


Figure S2. DPVs of modified electrode (a) (containing 20.0 μ M of PMT) and (b) after four weeks.

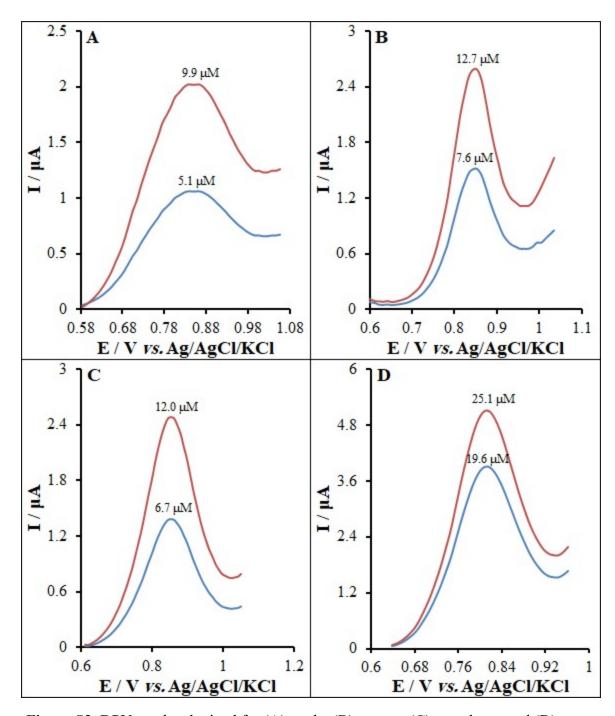


Figure S3. DPV results obtained for (A) apple, (B) orange, (C) strawberry and (D) water samples in presence of PMT at the electrode modified.