

Supporting Information

NaCl-treated multiple carbon coating BaTiO₃ nanoparticles towards enhancing dielectric properties

Peng Wang, Zihao Guo, Zhihao Sun, Benli Du, Shaoyao Tian, Yu Qiu, Han Ding,

Lei Qian*

Key Laboratory for Liquid-Solid Structural Evolution and Processing of Materials

(Ministry of Education), Shandong University, 17923 Jingshi Road, Jinan 250061,

China

*Corresponding author, Email: qleric@sdu.edu.cn

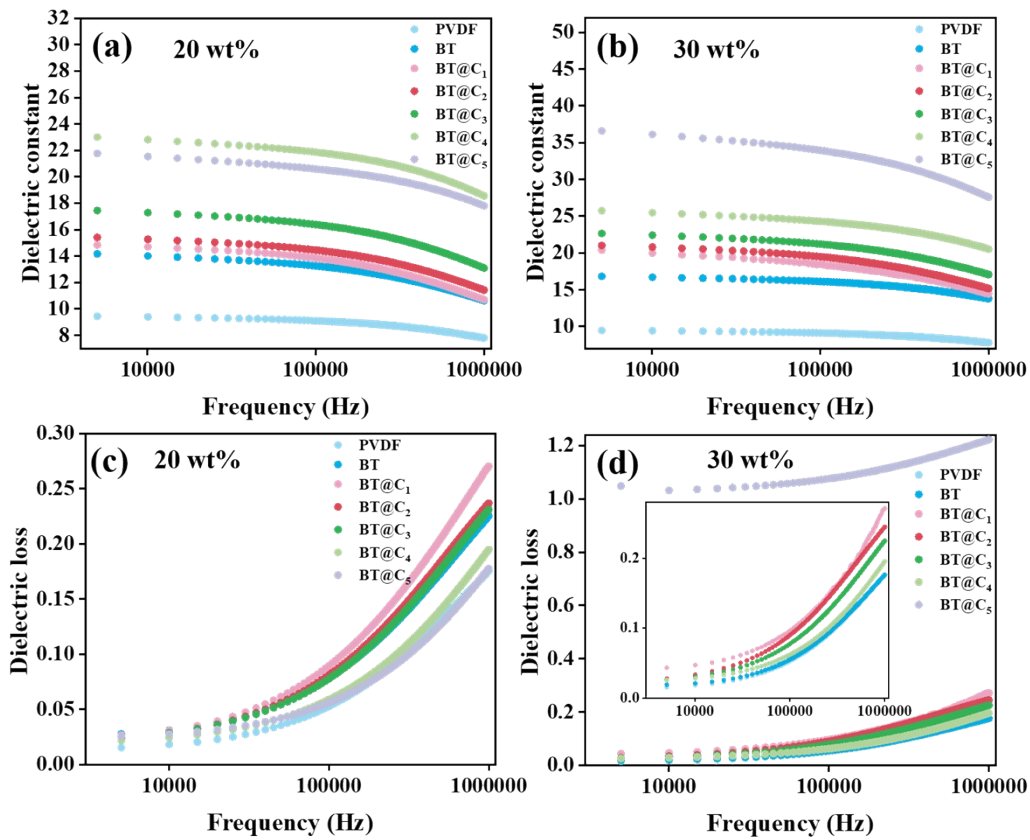


Fig. S1. The dielectric constant of BT@ C_x /PVDF with 20 wt% (a); and 30 wt% (b) filling amounts; the dielectric loss of BT@ C_x /PVDF with 20 wt% (c); and 30 wt% (d) filling amounts.

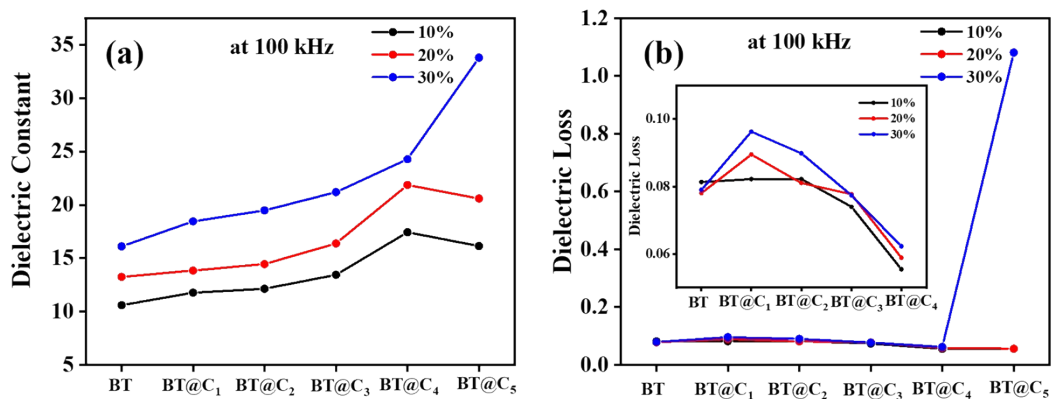


Fig. S2. The dielectric constant (a) and the dielectric loss (b) of BT@ C_x /PVDF with 10 wt%, 20 wt%, and 30 wt% filling amounts at 100 kHz.