Supplementary Information (SI) for Analytical Methods. This journal is © The Royal Society of Chemistry 2025

## Zn-MOF-8-Based Nitrogen-Doped Mesoporous Carbon/Multi-Walled Carbon Nanotube-Modified Electrode for Highly Sensitive Detection of Isoquercitrin

Wei Liu\*a,b, Zi Li a, Hongfang Li a, Qiongyao Zeng d, Yanhua Sun\*a, Siqi Ding a, Pingping Huang a, Pengli Zhang\*c, Zhiyong Zhu a, Zimo Zhang a

<sup>a</sup> School of Environment and Life Health, Anhui University of Applied Technology, Hefei city, Anhui province, 230011, P.R. China; Ministry of Education Collaborative Innovation Center for Chemistry and Life Sciences, Hefei, Anhui Province, 230011, China.

<sup>b</sup> College of Civil Engineering, Anhui Jianzhu University, Hefei, Anhui province, 230601, P.R. China.

<sup>c</sup> The First People's Hospital of Yunnan Province, Kunming 650032, P.R. China.

<sup>d</sup> Yunnan Provincial Hospital of Traditional Chinese Medicine, Kunming 650021, P.R. China Yunnan University of Chinese Medicine, Kunming 650500, P.R. China

\*Corresponding author.

E-mail address: weillau@163.com/liuw@uta.edu.cn;

634808672@qq.com; zhangpengl2023@163.com

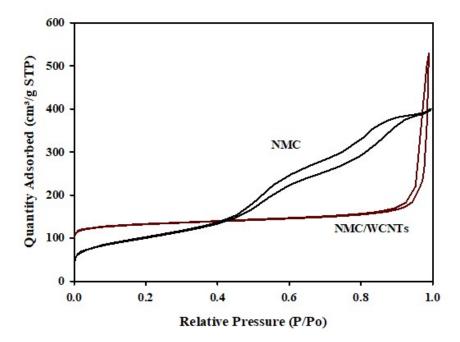


Figure S1 BET surface area analysis diagram for NMC and NMC/WCNTs. The BET surface area of NMC is  $357.3184~m^2/g$ , and the BJH Desorption average pore diameter of NMC is 5.4729~nm. The BET surface area of NMC is  $428.8741~m^2/g$ , and the BJH Desorption average pore diameter of NMC is 28.6003~nm.

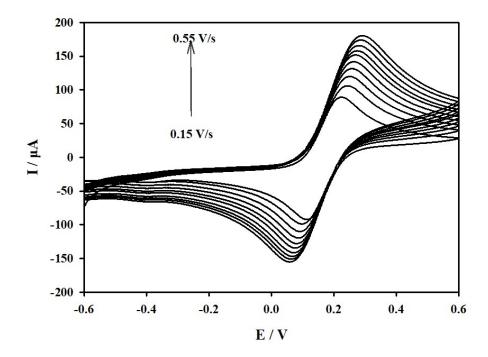


Figure S2 Effect of scan rate on the redox peak current of NMC/MWCNTs/GCE;