

Supporting information:

Electrografting solid polymer electrolytes for separator-less structural sodium batteries

Elvira Lind*^a, Vincent Nieboer^b, Martina Cattaruzza^c, Mats Johansson^c, Karin Odelius^b,

Dan Zenkert^d, Göran Lindbergh^a

^a Applied Electrochemistry, Chemical Engineering, KTH Royal Institute of Technology, SE-100 44 Stockholm, Sweden

^b Polymer Technology, Fiber and Polymer Technology, KTH Royal Institute of Technology, SE-100 44 Stockholm, Sweden

^c Coating Technology, Fiber and Polymer Technology, KTH Royal Institute of Technology, SE-100 44 Stockholm, Sweden

^d Material and Structural Mechanics, Engineering Mechanics, KTH Royal Institute of Technology, SE-100 44 Stockholm, Sweden

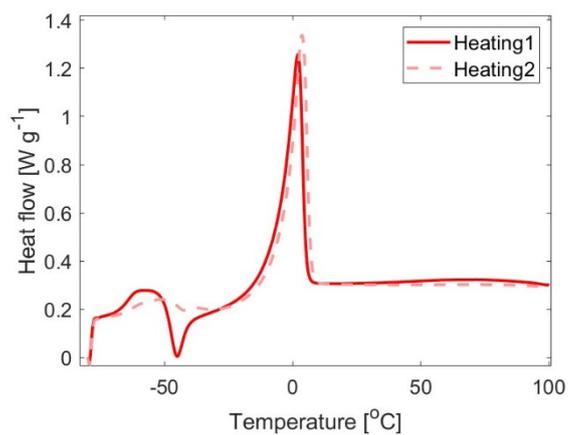


Fig. S 1. Figure S1. The first and second heating cycle during the DSC measurements for the bulk polymer containing no salt.

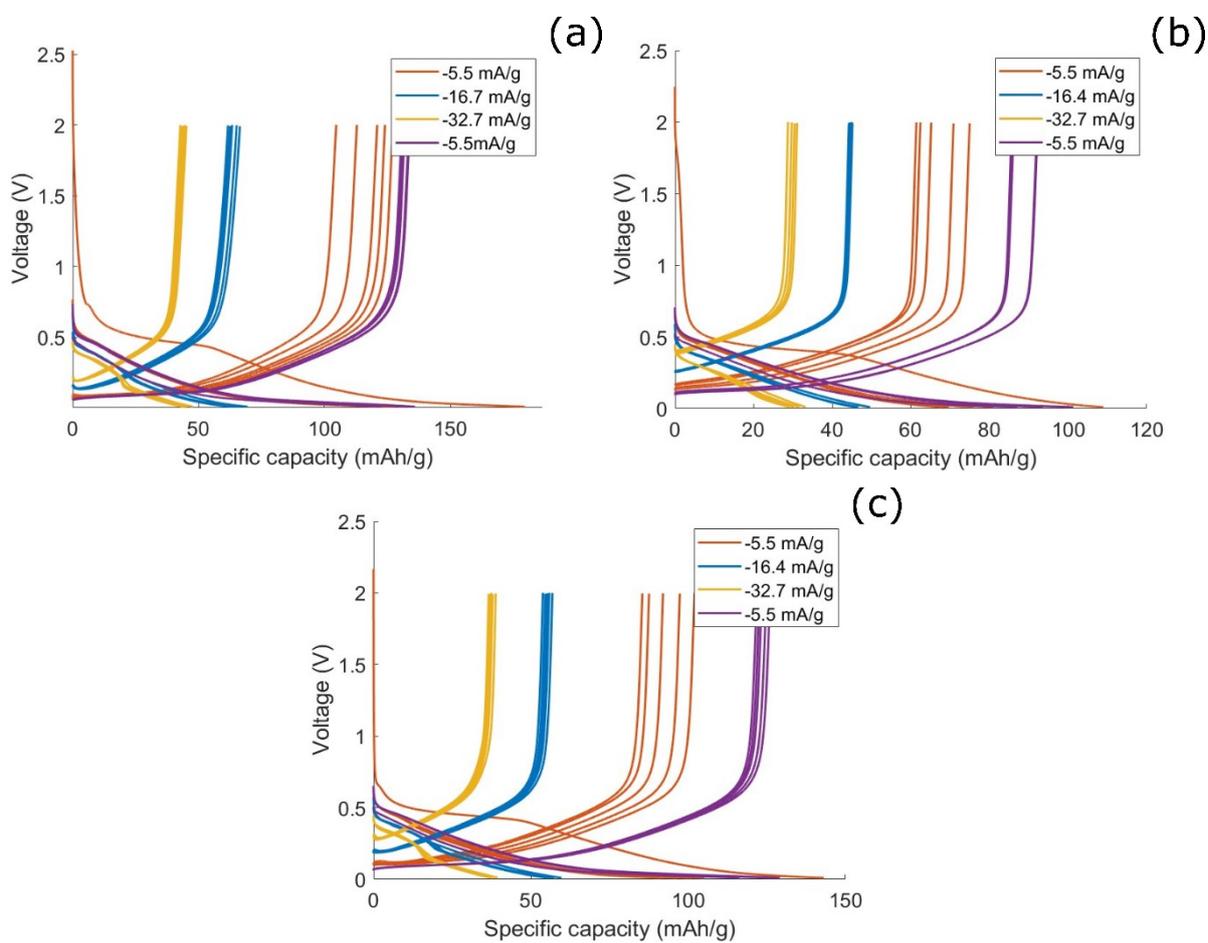


Fig. S 2. The charge/discharge profiles obtained during the rate performance tests for the (a) uncoated CFs, (b) coated rinsed CFs and (c) coated leached CFs.