

Supplementary Information

Nanostructured Lignin Carriers for Efficient Flame Retardant Delivery in Natural Rubber Composites

Periklis D. Alikiotis¹, Tizazu H. Mekonnen^{1*}

¹*Department of Chemical Engineering, Institute of Polymer Research, Waterloo Institute of Nanotechnology, University of Waterloo, N2L 3G1, Waterloo, ON, Canada*

*Corresponding author: tmekonnen@uwaterloo.ca.

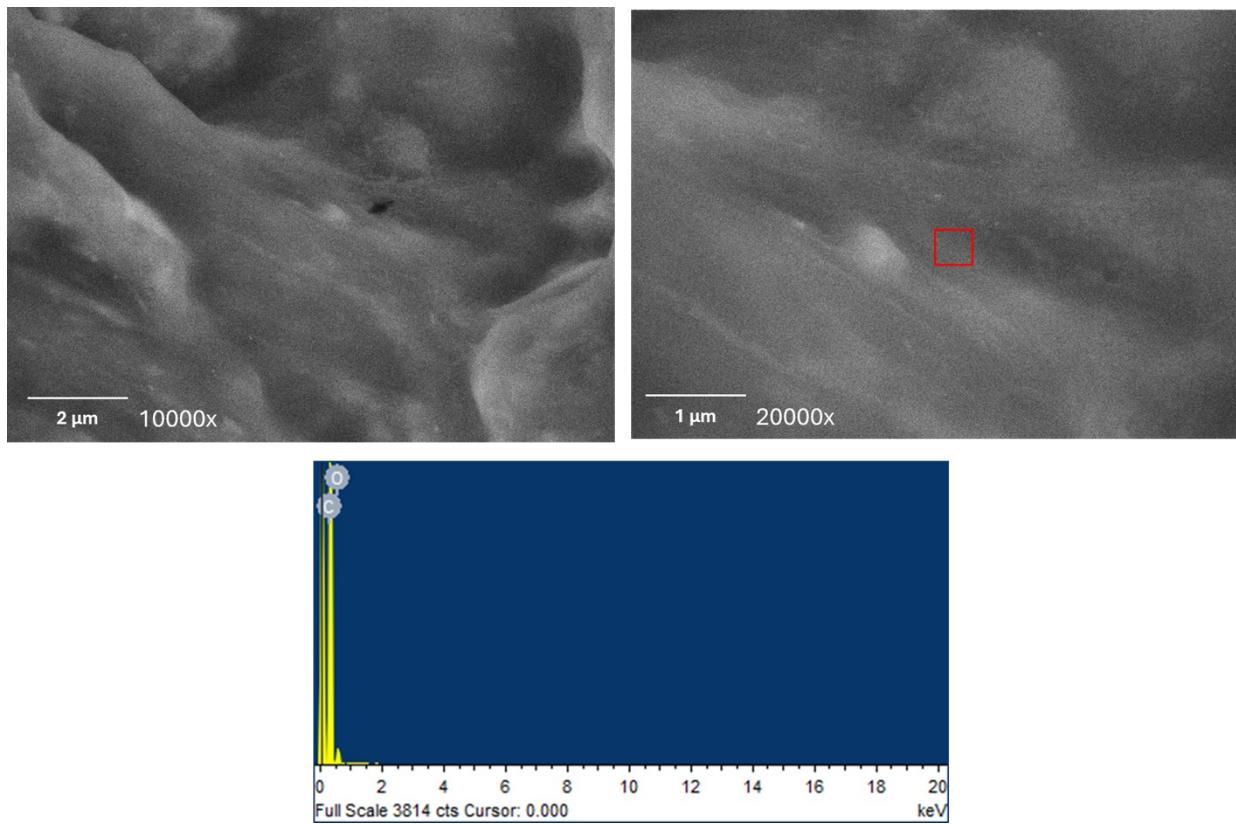


Figure S1: E-SEM images of sample N after drying with EDS on area marked in red.

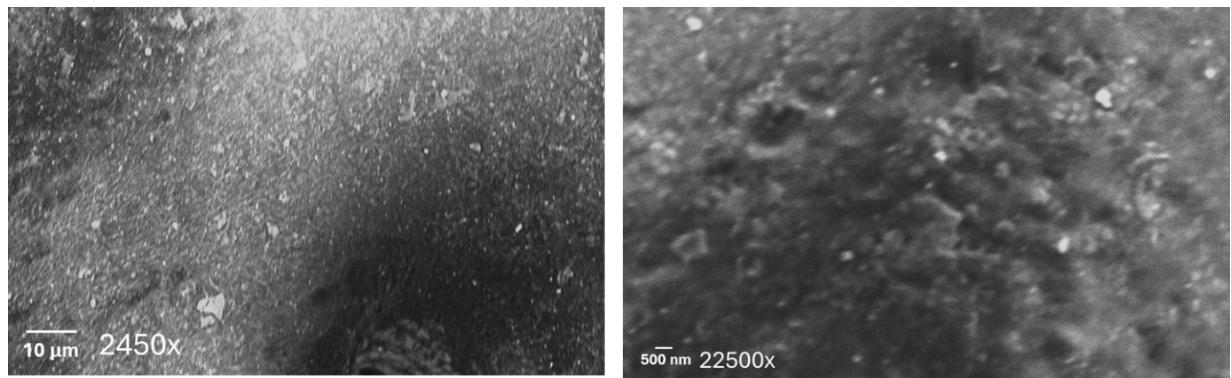


Figure S2: E-SEM images of sample 2.5-LNC after drying.

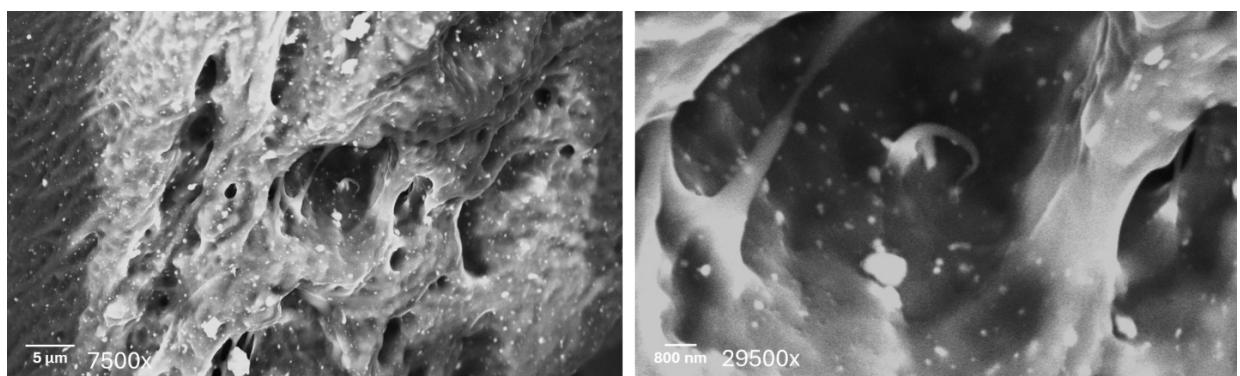


Figure S3: E-SEM images of sample 5-LNC after drying.

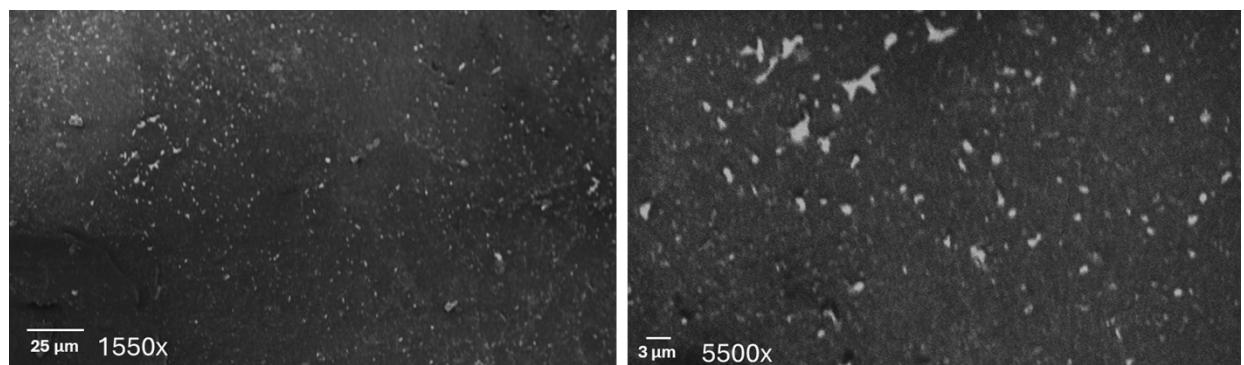


Figure S4: E-SEM images of sample 10-LNC after drying.

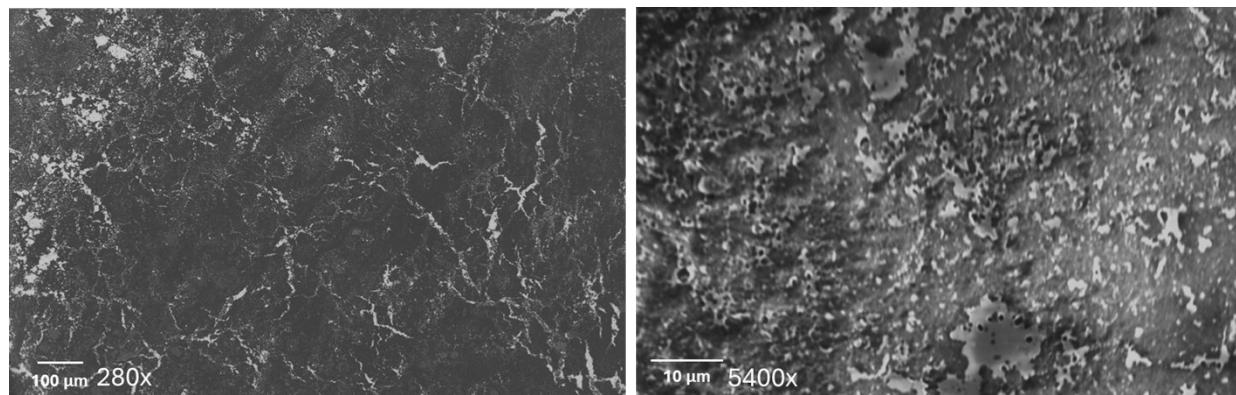


Figure S5: E-SEM images of sample 10-L+A after drying.

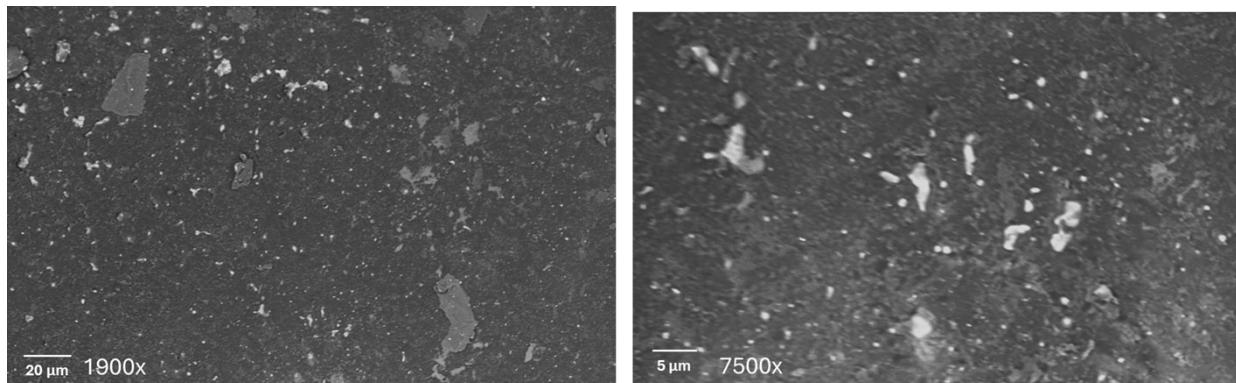


Figure S6: E-SEM images of sample 15-LNC after drying.

