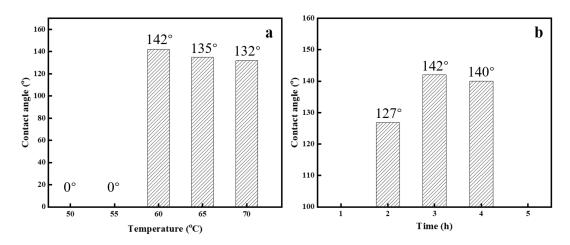
## **Supplementary Material**

- 2 Superhydrophobic 3-aminopropyltriethoxysilane modified
- 3 graphene oxide graft copolymer/melamine sponge for
- 4 efficient oil/water separation
- 5 Yuan Zhou, <sup>a</sup> Wenyue Jiao, <sup>a</sup> Lei Tan, <sup>a</sup> Yan Hao, <sup>\*a</sup> Yicheng Wang, <sup>b</sup> Tingrui Lin, <sup>b c</sup>
- 6 Huazheng Sai, a

1

- 7 a Institute of Applied Chemistry School of Chemistry and Chemical Engineering,
- 8 Inner Mongolia University of Science & Technology, Baotou 014010, P. R. China
- 9 b Beijing National Laboratory for Molecular Sciences, Radiochemistry and Radiation
- 10 Chemistry Key Laboratory of Fundamental Science, the Key Laboratory of Polymer
- 11 Chemistry and Physics of the Ministry of Education, College of Chemistry and
- 12 Molecular Engineering, Peking University, Beijing 100871, P. R. China
- <sup>c</sup> Fujian Key Laboratory of Architectural Coating, Skshu Paint Co., Ltd., Putian,
- 14 Fujian 351100, P. R. China



**Fig. S1** Effect of grafting reaction temperature (a) and time (b) on the contact angle of GO-*g*-PBA.