

Supporting Information

Synergistic Modification of BN and TiO₂ on Polyethersulfone Multilayered Dielectric for Enhanced Elevated-Temperature Energy Storage Performance

Yue Zhang^{*a,b,c}, Wenhao Zhang^c, Guowei Hao^c, Jiaying Che^c, Zewei Wang^c, Yinhua Zhou^d,
Changhai Zhang^{a,b,c}, Yongquan Zhang^{a,b,c} and Tiandong Zhang^{a,b,c}

^aState Key Laboratory of High-Efficiency Special Cable Technology, Harbin University of Science and Technology, Harbin, 150080, P. R. China

^bKey Laboratory of Engineering Dielectrics and Its Application, Ministry of Education, Harbin University of Science and Technology, Harbin, 150080, P. R. China

^cSchool of Electrical and Electronic Engineering, Harbin University of Science and Technology, Harbin, 150080, P. R. China

^dState Grid Sichuan Electric Power Company Guang'an Power Supply Company, Guang'an. 638000, P. R. China

* Corresponding Author:

E-mail: yzhang_ana@hrbust.edu.cn.

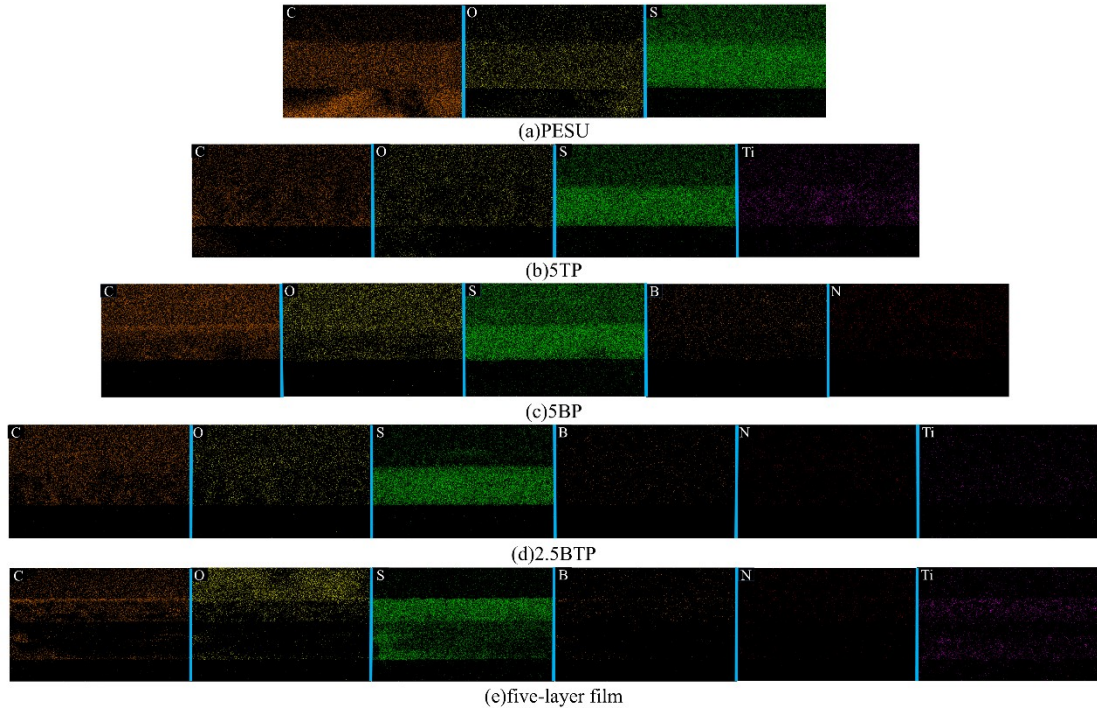


Figure S1. EDS spectra of PESU-based composite films.

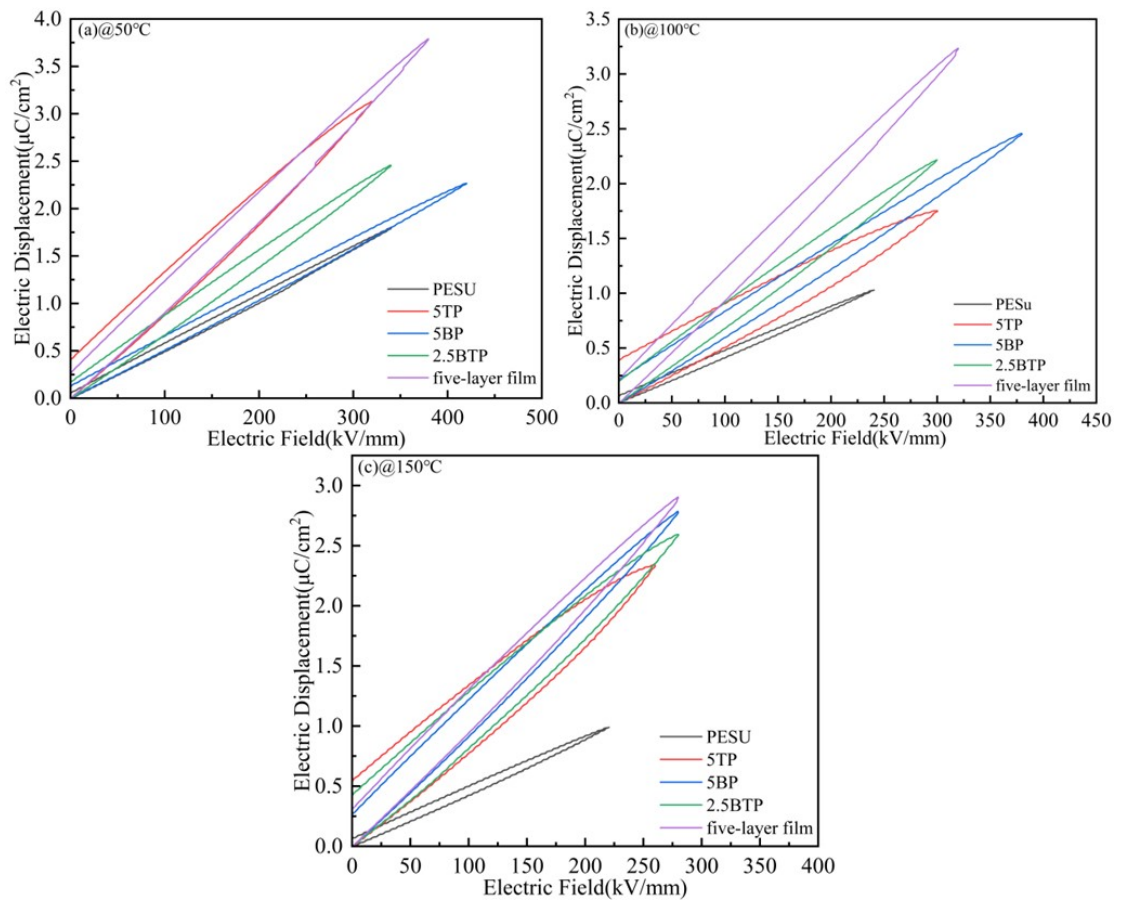


Figure S2. The relationship curve of $D-E$ loops (electric displacement vs. electric field strength) for composites.