

Electronic Supplementary Information

For

Screening structure-property-correlations and device performance of Ir(III) complexes in multi-layer PhOLEDs

Nan Tian,^{a,c} Daniel Lenkeit,^a Simon Pelz,^a Dimitrios Kourkoulos,^b Dirk Hertel,^b Klaus Meerholz*^b and Elisabeth Holder*^{a,c}

^a *Functional Polymers Group and Institute of Polymer Technology, University of Wuppertal, Gaußstr. 20, D-42097 Wuppertal, Germany. Fax: +49-202-439-3880; Tel: +49-202-439-3879; E-mail: holder@uni-wuppertal.de*

^b *Institute of Physical Chemistry, University of Cologne, Luxemburgerstr. 116, D-50939 Cologne, Germany. Fax: +49-221-470-5144; Tel: +49-221-470-3275; E-mail: klaus.meerholz@uni-koeln.de*

^c *Dutch Polymer Institute (DPI), P.O. Box 513, NL-5600 AX Eindhoven, The Netherlands.*

Contents:

Fig S1 Typical current <i>versus</i> voltage curves for the screened devices.	2
Fig S2 Typical brightness <i>versus</i> current density curves for the screened devices.	2
Fig S3 Typical efficiency <i>versus</i> current density curves for the screened devices.	3

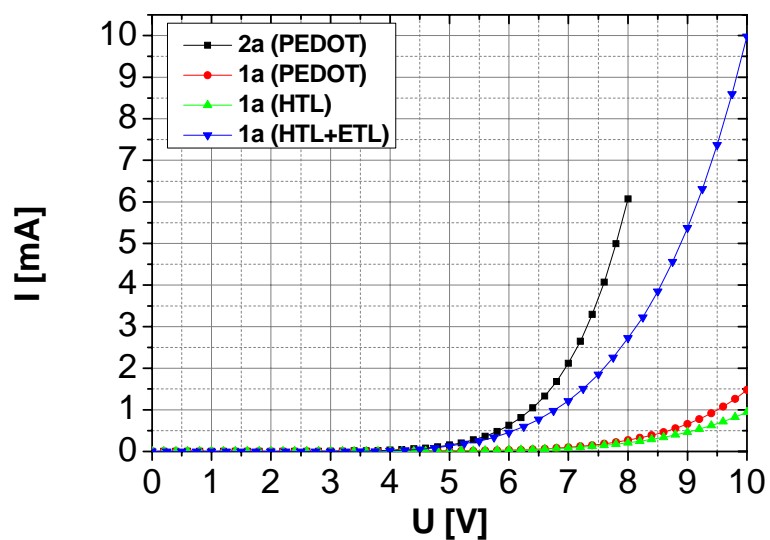


Fig S1 Typical current *versus* voltage curves for the screened devices.

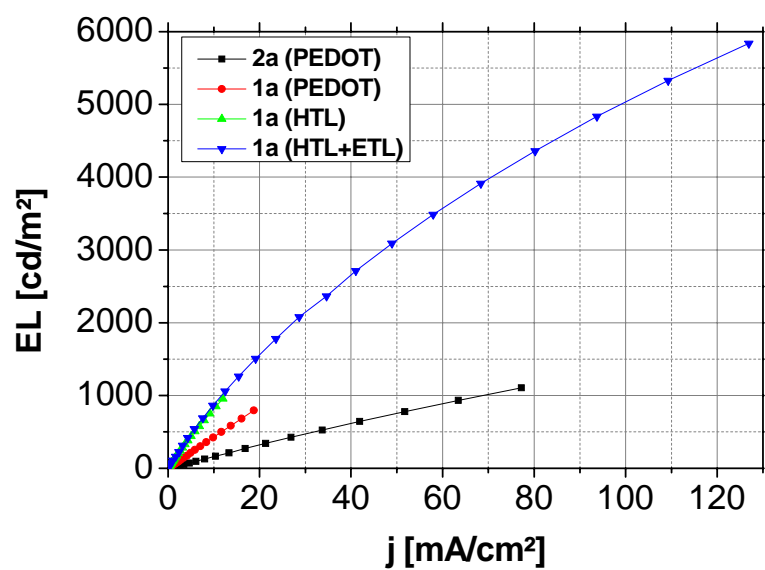


Fig S2 Typical brightness *versus* current density curves for the screened devices.

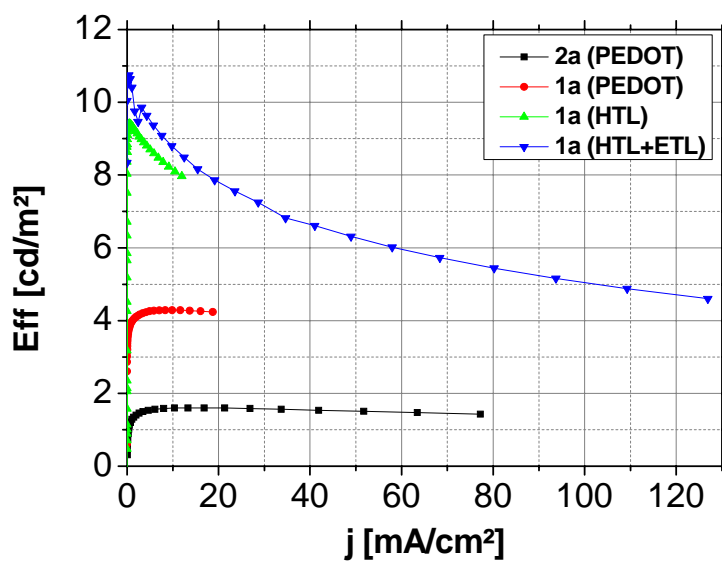


Fig S3 Typical efficiency *versus* current density curves for the screened devices.