

Cite this: DOI: 10.1039/c0xx00000x

PAPER

www.rsc.org/xxxxxx

Supporting Information

for *Energy & Environmental Science*, DOI: 10.1039/c0xx00000x

5 **Advanced Intermediate-Temperature Na-S Battery**

**Xiaochuan Lu, * Brent W. Kirby, Wu Xu, Guosheng Li, Jin Y. Kim, * John P. Lemmon, Vincent L.
10 Sprenkle, and Zhenguo Yang^a**

Energy and Environment Directorate, Pacific Northwest National Laboratory, Richland, WA 99354, USA

* Corresponding author. Tel.: +1 509 372 4894, +1 509 375 2225; fax: +1 509 375 2186.

15 *E-mail address:* Xiaochuan.Lu@pnnl.gov (Xiaochuan Lu), Jin.Kim@pnnl.gov (Jin Y. Kim).

^a Present address: UniEnergy Technologies, LLC, 4333 Harbour Pointe Blvd SW, Mukilteo, WA 98275.

20

25

30

5

10

15

20

25

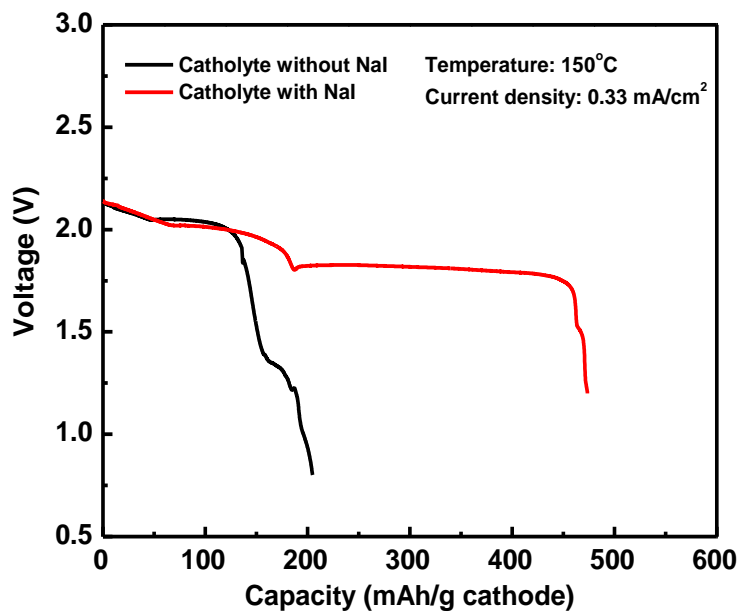


Figure S1. Initial discharge curves of Na-S batteries with and without addition of NaI into the tetraglyme
30 catholyte.

35

40

45

50


5

10

15

20

25

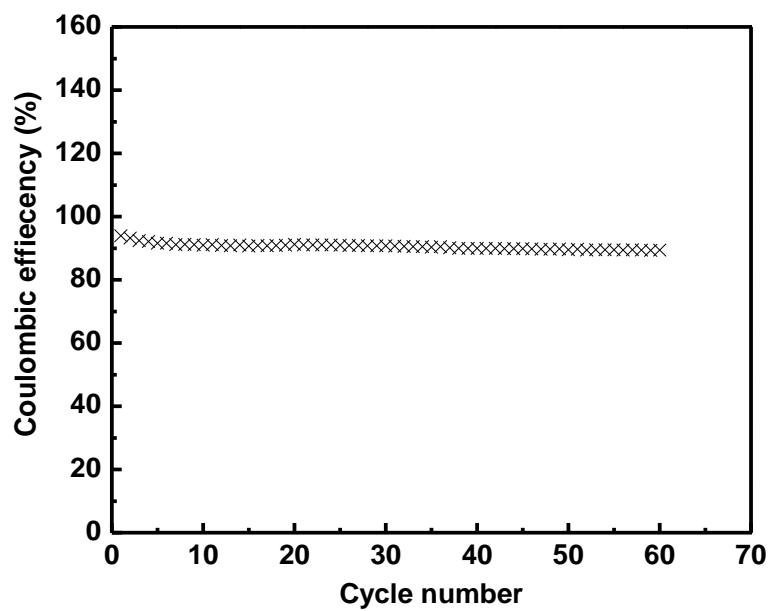

30

Figure S2. Coulombic efficiency of a Na-S battery at 150°C.

35