

Supporting Information

High-Efficiency Polymer Solar Cells with a Cost-Effective Quinoxaline Polymer through Nanoscale Morphology Control Induced by Practical Processing Additives

Yiho Kim,[‡] Hye Rim Yeom,[‡] Jin Young Kim*, and Changduk Yang*

Interdisciplinary School of Green Energy, KIER-UNIST Advanced Center for Energy, Low Dimensional Carbon Materials Center, Ulsan National Institute of Science and Technology (UNIST), Ulsan 689-798, South Korea.

Table of Contents

Page number

• UV-Vis absorption spectra and cyclic voltammetry of TQ1	S2
• <i>J-V</i> characteristics of PSCs based on TQ1:PC ₇₁ BM	S3
• <i>J-V</i> characteristics and (b) IPCE of the inverted TQ1:PC ₇₁ BM PSCs	S3
• Statistical data analysis of PCEs with the devices	S3

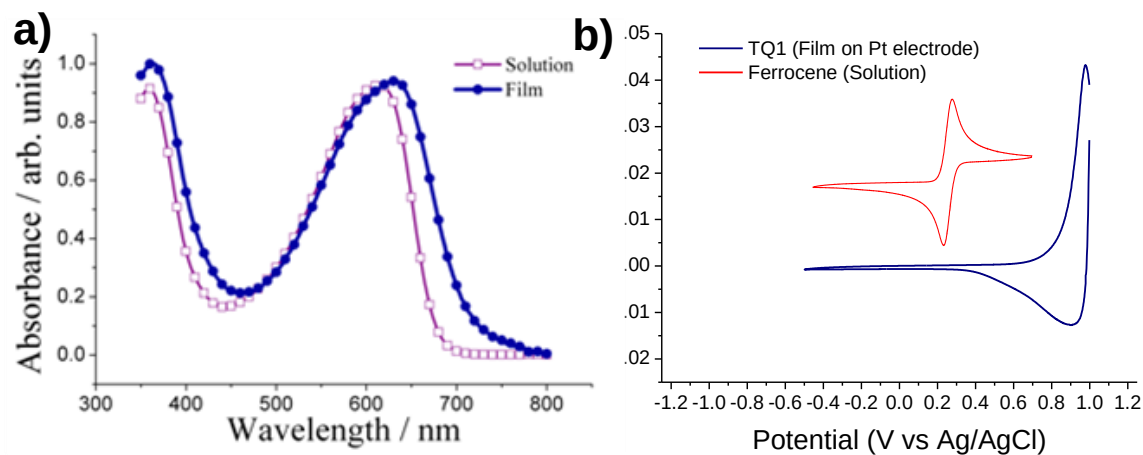


Figure S1. (a) UV-Vis absorption spectra of TQ1 in dilute chloroform solution and thin films on glass plate. (b) Cyclic voltammograms of TQ1 in the films.

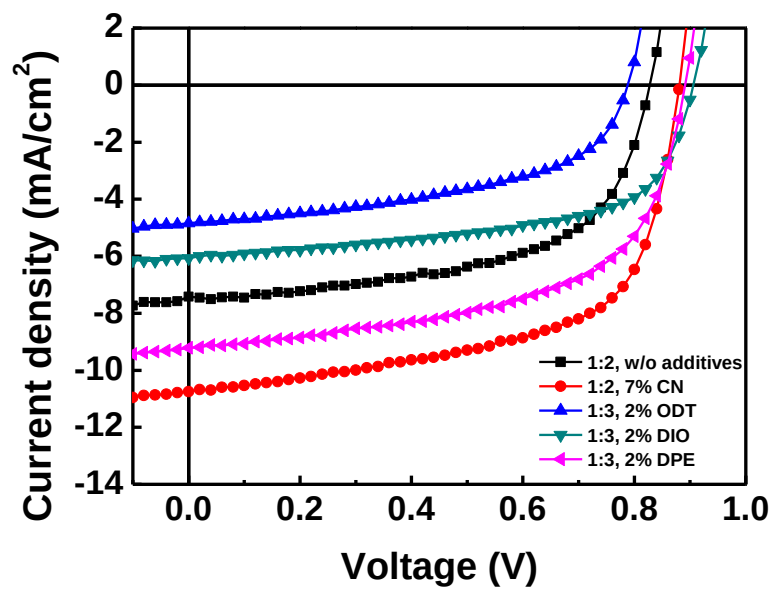


Figure S2. *J-V* characteristics of PSCs based on TQ1:PC₇₁BM without or with various additives.

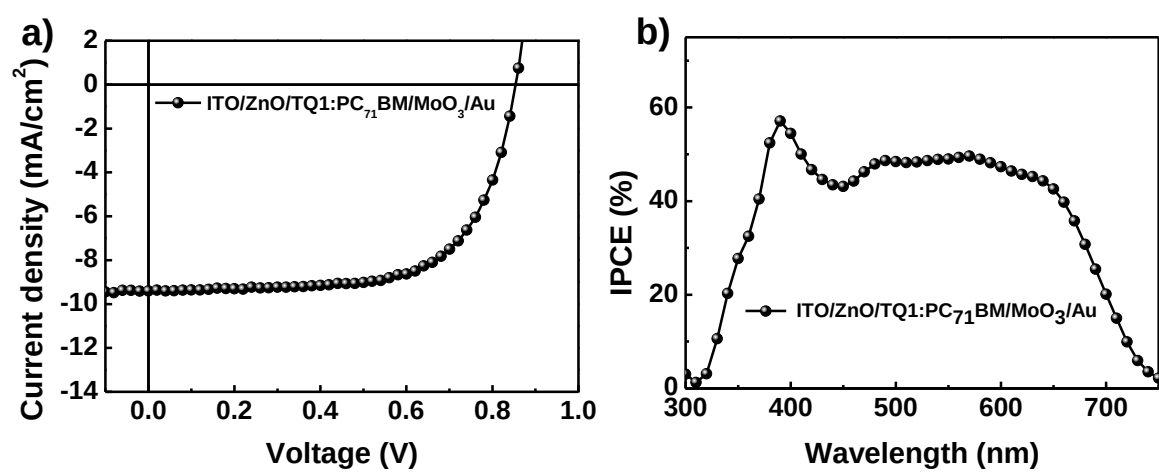


Figure S3. (a) *J*-*V* characteristics and (b) IPCE of the inverted TQ1:PC₇₁BM PSCs using Au. *J*_{SC} = 9.40 mA/cm², *V*_{OC} = 0.85 V, *FF* = 0.67, PCE = 5.35%.

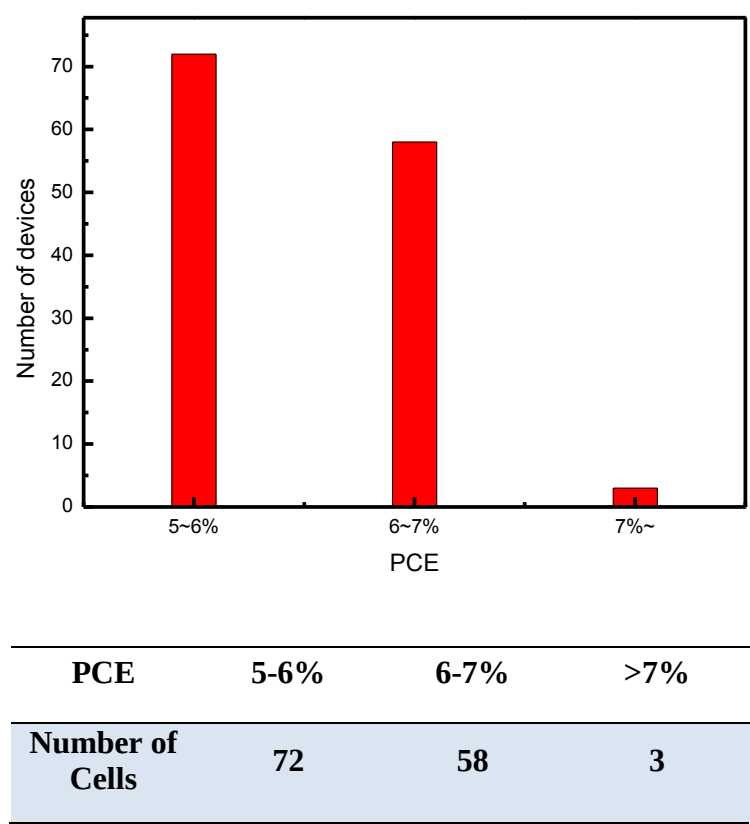


Figure S4. Statistical data analysis of PCEs with the devices (TQ1:PC₇₁BM = 1:2 (w/w) with 5% CN).