

## Electronic Supplementary Information

### Bio-inspired mechanically-adaptive nanocomposites derived from cotton cellulose whiskers

Kadhiravan Shanmuganathan,<sup>a</sup> Jeffrey R. Capadona,<sup>b,c</sup> Stuart J. Rowan<sup>\*a,b,d</sup> and Christoph Weder<sup>\*a,e</sup>

<sup>a</sup> Department of Macromolecular Science & Engineering, Case Western Reserve University (CWRU), 2100 Adelbert Road, Cleveland, Ohio 44106-7202, USA.


<sup>b</sup> Department of Biomedical Engineering, CWRU, Cleveland, OH, USA.

<sup>c</sup> Rehabilitation Research and Development, Louis Stokes Cleveland DVA Medical Center, Cleveland, OH, USA.


<sup>d</sup> Department of Chemistry, CWRU, Cleveland, OH, USA.

<sup>e</sup> Adolphe Merkle Institute and Fribourg Center for Nanomaterials, University of Fribourg, CH-1700 Fribourg, Switzerland.

\* To whom correspondence should be addressed. E-mail: [christoph.weder@unifr.ch](mailto:christoph.weder@unifr.ch); [stuart.rowan@case.edu](mailto:stuart.rowan@case.edu)

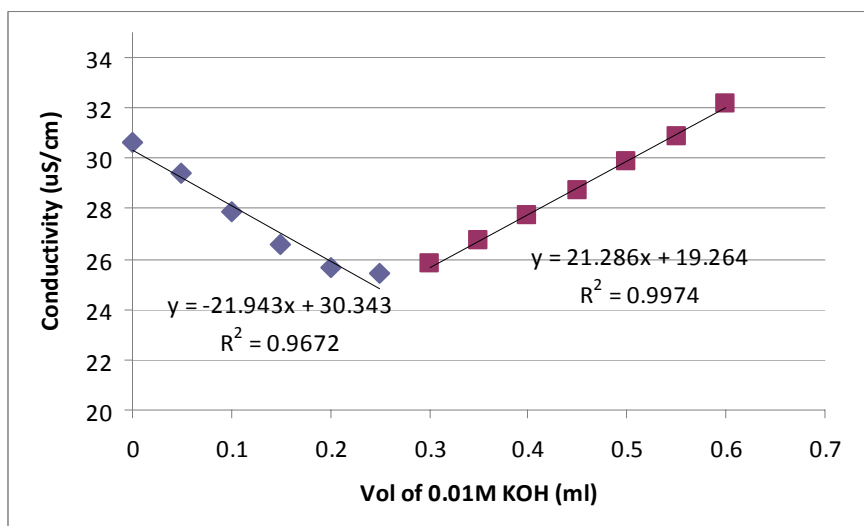

**Figure S1:** Conductometric titration of cotton cellulose whiskers in water. From the endpoint (0.256 mL of 0.01M KOH) and the quantity of whiskers in the aqueous whisker dispersion (83.6 mg), the surface charge density was determined by  $(0.256 \text{ ml} \cdot 10^{-2} \text{ mol}) / 83.6 \text{ mg} = 30.6 \text{ mmol/Kg}$

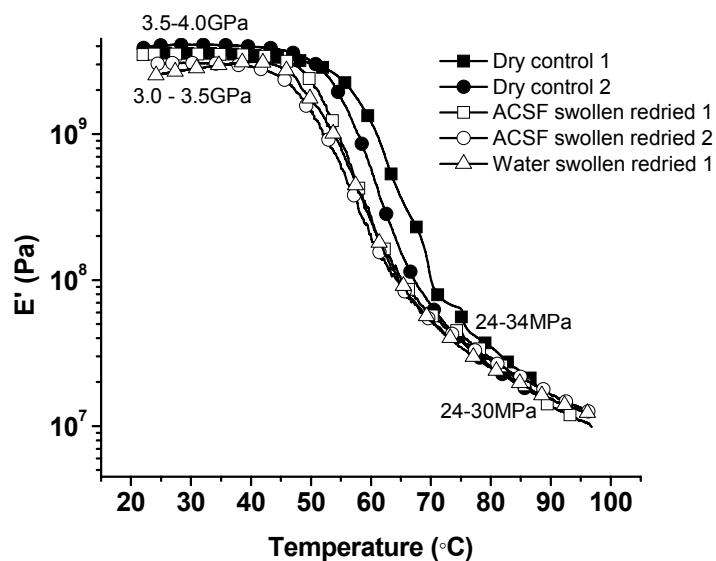

**Figure S2:** DMA temperature sweeps of 12.2%v/v CCW/PVAc nanocomposite films showing the reversibility of stiff - soft transition. Nanocomposite tested in dry condition and after exposing to ACSF or water at 37°C for 1 week and then redried back shows similar moduli both below and above  $T_g$ .