

Supplementary Material (ESI) for Journal of Materials Chemistry
This journal is © The Royal Society of Chemistry 2010

Supplementary Information

Vertical ZnO Nanowires/Graphene Hybrids for Transparent and Flexible Field Emission

Jin Ok Hwang, Duck Hyun Lee, Ju Young Kim, Tae Hee Han, Bong Hoon Kim,
Moonkyu Park, Kwangsoo No, Sang Ouk Kim*

Department of Materials Science and Engineering, KAIST Institute for Nanocentury,
KAIST
Daejeon, 305-701, Republic of Korea

e-mail: sangouk.kim@kaist.ac.kr

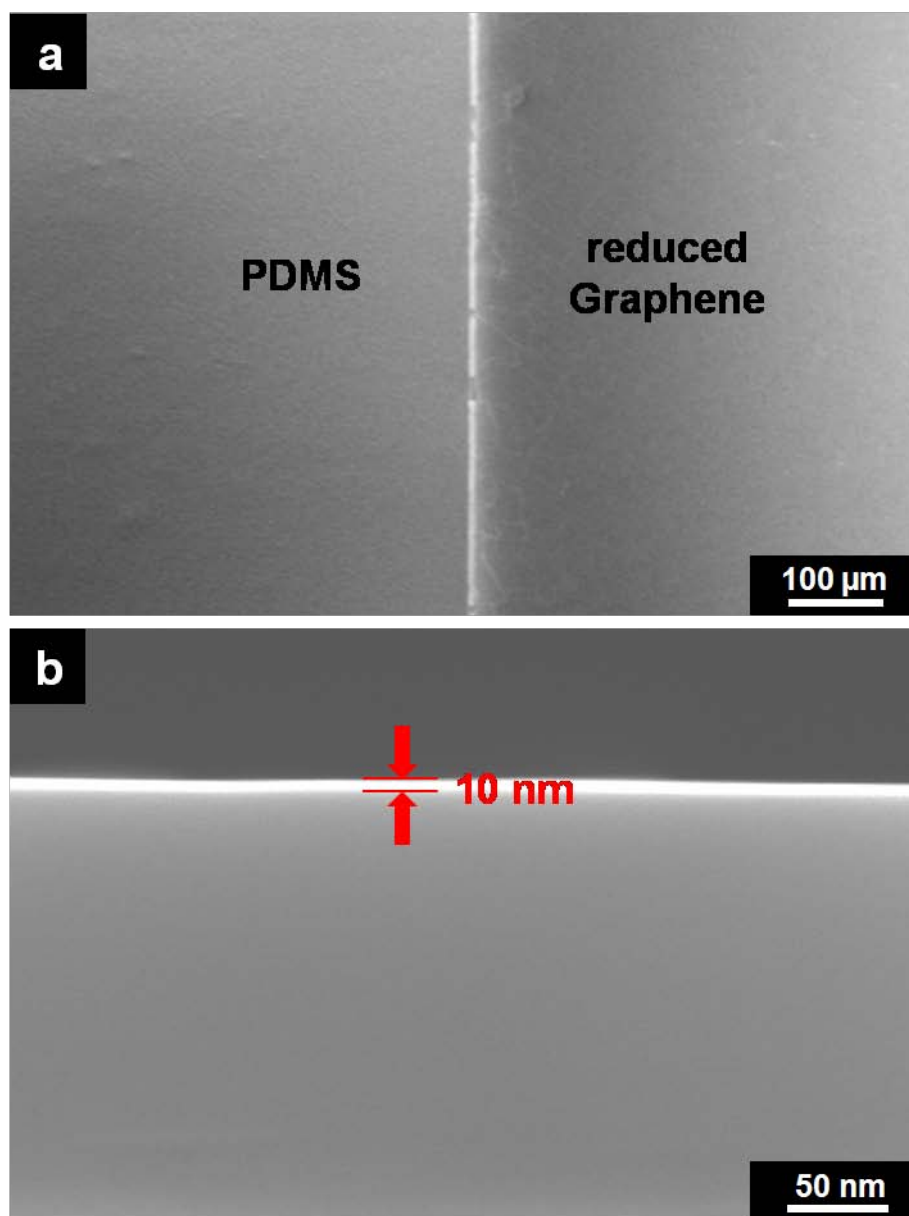


Figure S1. a) Plane-view SEM image of the reduced graphene film on PDMS. b) Cross-sectional SEM image of reduced graphene film on a SiO₂/Si substrate after thermal reduction at 600 °C.

Table S1. Sheet resistance measurements of the reduced graphene film with 4-point probe.

Sample size: 1 cm X 1 cm, reduced graphene film thickness: ~ 10 nm

1 st	2 nd	3 rd	4 th	5 th	6 th	7 th	8 th	9 th	10 th	Ave.
20.72 K Ω / $\square$	20.80 K Ω / $\square$	20.26 K Ω / $\square$	21.46 K Ω / $\square$	20.90 K Ω / $\square$	20.92 K Ω / $\square$	20.75 K Ω / $\square$	20.12 K Ω / $\square$	21.05 K Ω / $\square$	20.46 K Ω / $\square$	20.7 (± 0.1) K Ω / $\square$