

Supporting Information

Molecular Engineering of Push-Pull Chromophore for Efficient Bulk-Heterojunction Morphology in Solution Processed Small Molecule Organic Photovoltaics

Haye Min Ko^a, Hyunbong Choi^a, Sanghyun Paek^a, Kyungjun Kim^a, Kihyung Song^b, Jae Kwan Lee^c and Jaejung Ko^{a,*}



^a Department of Advanced Material Chemistry, Korea University, Chungnam, 330-700, Korea, E-mail: jko@korea.ac.kr; Fax: +82-41-860-5396; Tel: +82-41-860-1337

^b Department of Chemistry, Korea National University of Education, Chungbuk 363-791, Korea



^c Department of Green Energy Engineering & Research Center for Convergence Technology, Hoseo University, Chungnam, 336-795, Korea

*Corresponding Author; e-mail: jko@korea.ac.kr

(a)

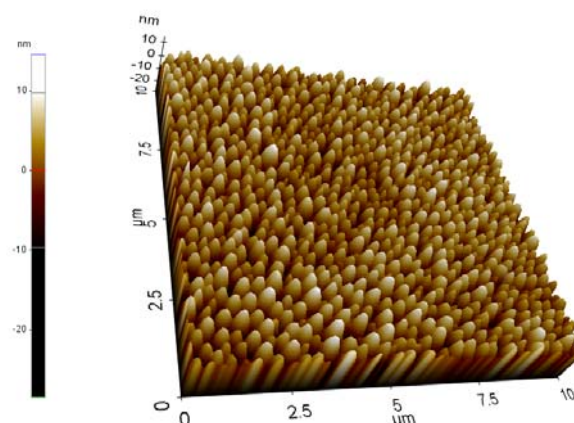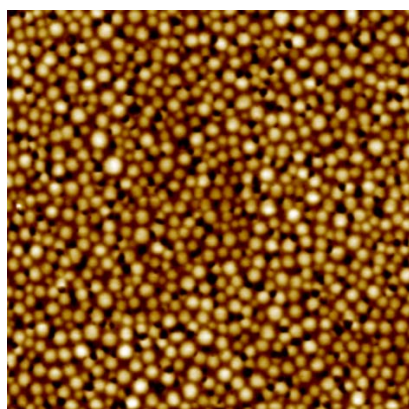

(b)

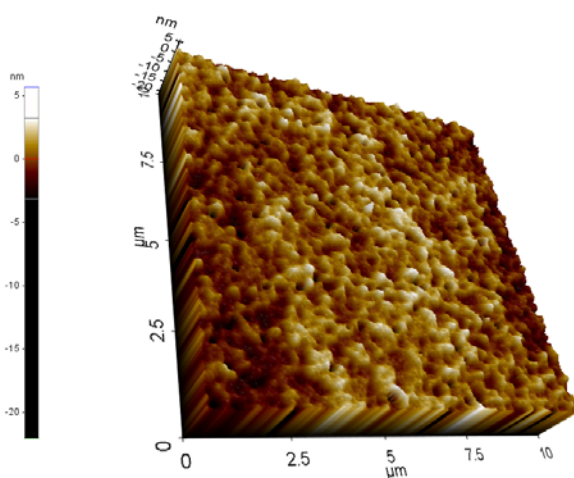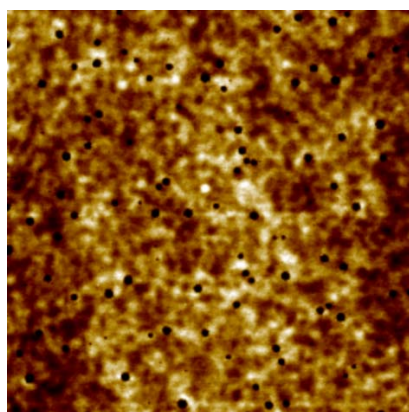

(c)

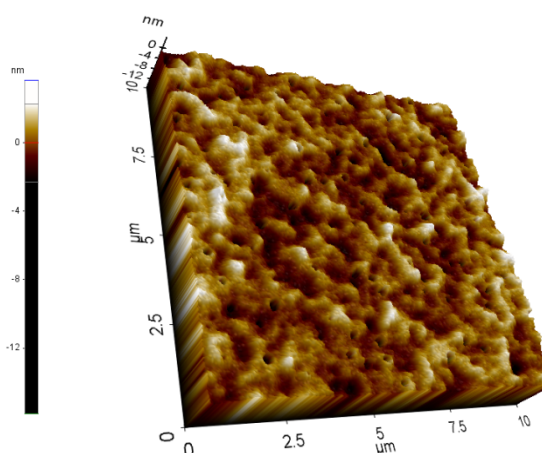
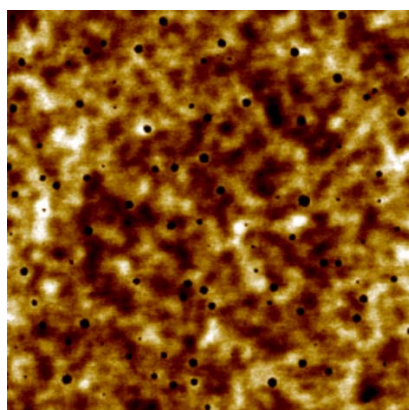


Figure S1. Tapping mode AFM surface topography of films cast from of (a) **bisDMFA-diTh-CA/C₇₁-PCBM** BHJ composite, (b) **bisDMFA-diTh-MMN/C₇₁-PCBM** BHJ composite annealed and (c) **bisDMFA-diTh-MIMN/C₆₁-PCBM** BHJ composite annealed.