

Electronic Supplementary Information for

**Surfactants-stabilized graphene/polyaniline nanofiber
composites for high performance supercapacitor electrode**

Lu Mao, Kai Zhang, Hardy Sze On Chan*, Jishan Wu*

*Department of Chemistry, National University of Singapore, 3 Science Drive 3,
Singapore 117543. Fax: (65) 6779 1691.*

E-mail: chmcsoh@nus.edu.sg (H.S.O. Chan), chmwuj@nus.edu.sg (J. Wu).

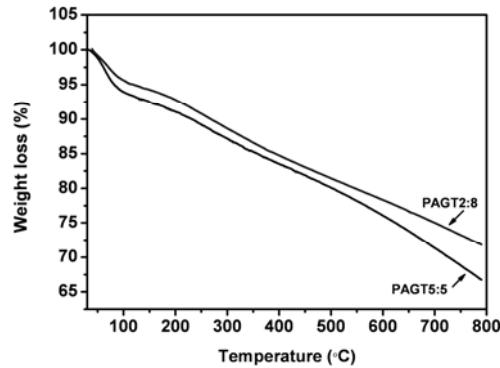


Fig. S1. TGA curves of PAGT2:8 and PAGT5:5 composites.

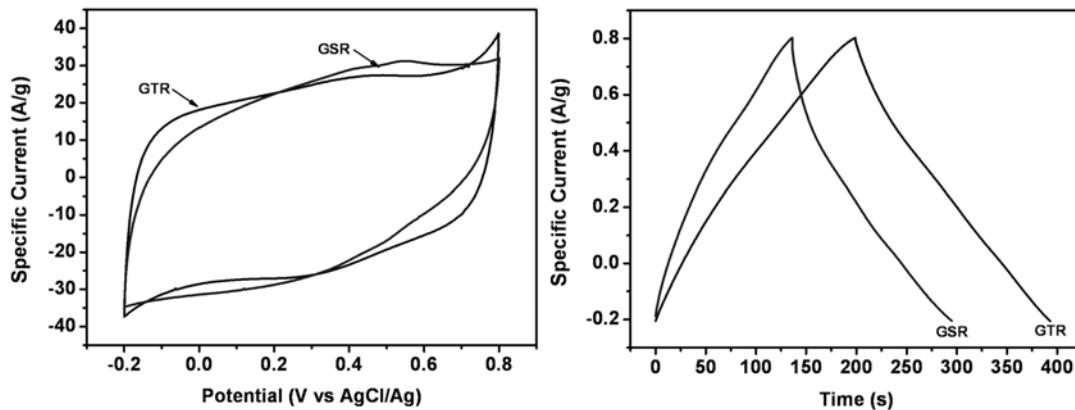


Fig. S2. Cyclic voltammograms and galvanostatic charge-discharge curves of GTR and GSR.

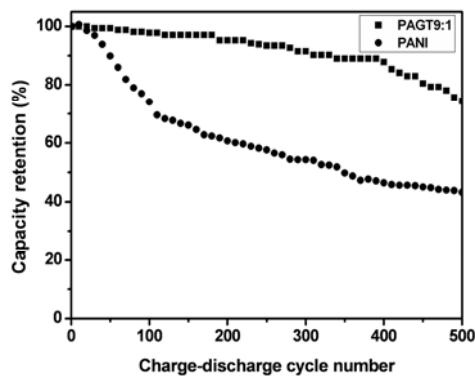


Fig. S3. Capacity retention of PAGT9:1 and PANI in 2 M H₂SO₄ versus the number of charge/discharge cycles under current density of 2 A g⁻¹.