

Supporting Information:

Novel conductive epoxy composites composed of 2-D chemically reduced graphene and 1-D silver nanowire hybrid fillers

Van Hoang Luan¹, Huynh Ngoc Tien¹, Tran Viet Cuong¹, Byung-Seon Kong², Jin Suk

Chung¹, Eui Jung Kim¹, and Seung Hyun Hur^{1,*}

¹ School of Chemical Engineering and Bioengineering, University of Ulsan, Daehak-ro

102, Nam-gu, Ulsan 680-749, South Korea

² Advanced Energy Materials Team, KCC Central Research Institute, Mabuk, Yongin-

si, Kyunggi-do 446-912, South Korea

*Corresponding authors: shhur@ulsan.ac.kr

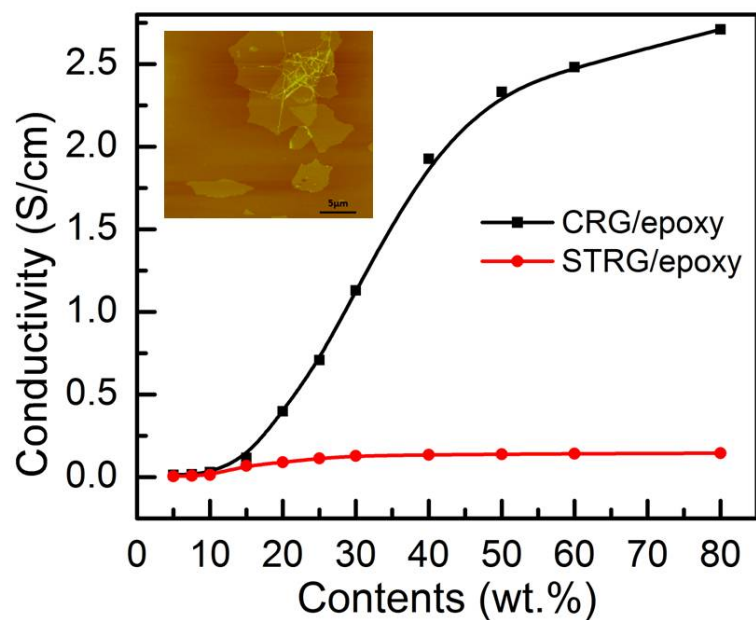


Figure S1. Relationship between the electrical conductivity of the composite and the CRG and STRG content. Inset : AFM image of CRG coated on the Si wafer.

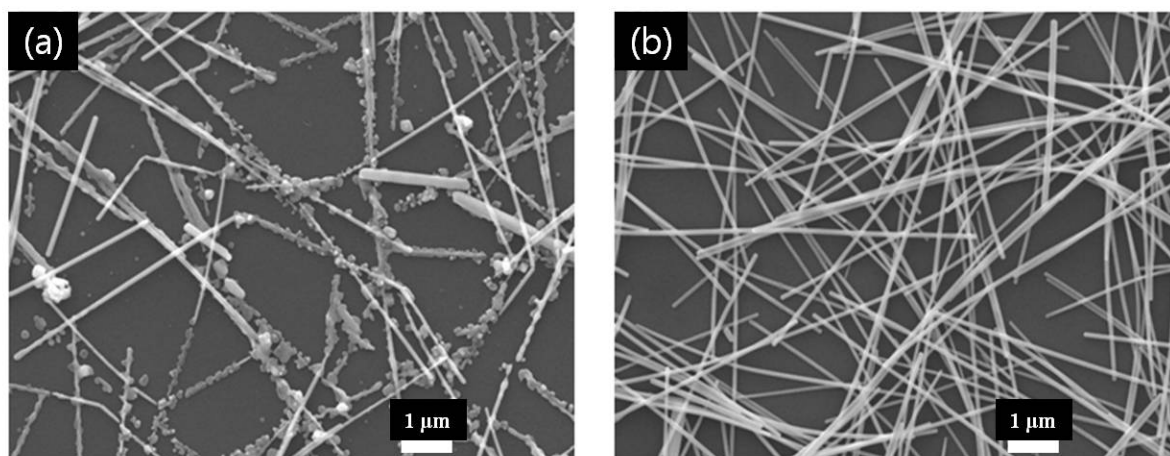


Figure S2. SEM image of Ag NWs (a) before and (b) after separation.

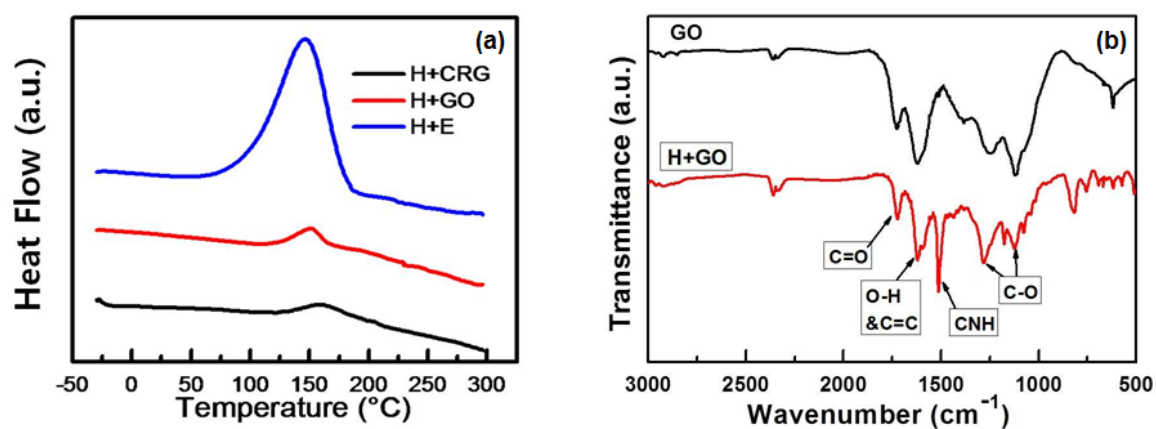


Figure S3. (a) DSC curves of CRG, GO, epoxy and hardener mixtures, (b) FT-IR spectrum of GO and GO + hardener. H indicates diamine type hardener and E indicates bisphenol A type epoxy resin