

SUPPLEMENTARY INFORMATION

Evaluation of GO/MnO₂ composites as supercapacitors in neutral electrolytes: Role of graphite oxide oxidation level

Mykola Seredych, and Teresa J. Bandosz*

Department of Chemistry, The CUNY Energy Institute, The City College of New York, 160 Convent

Ave, New York, NY, 10031, USA. E-mail: tbandosz@ccny.cuny.edu; Fax:

+1 212 650 6107; Tel: +1 212 650 6017

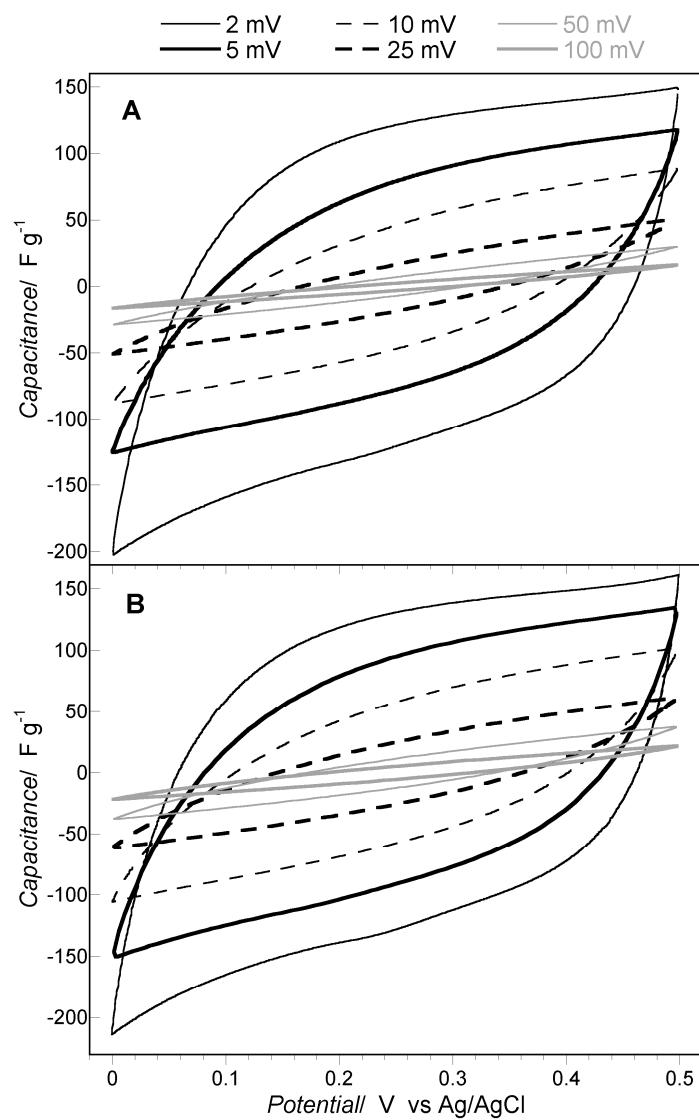


Fig. 1S. Cyclic voltammetry at different scan rate in three-electrode cell for MnGO-I in 0.5 M Na₂SO₄ (A) and 0.5 M Li₂SO₄ (B).

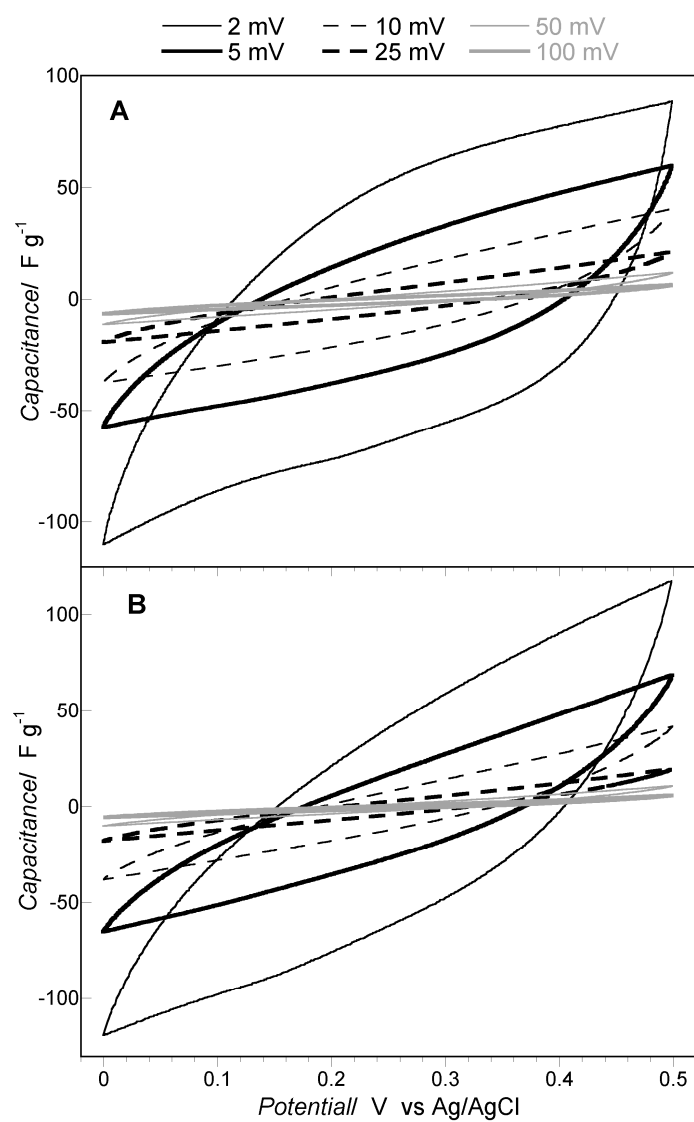


Fig. 2S. Cyclic voltammetry at different scan rate in three-electrode cell for MnGO-II in 0.5 M Na₂SO₄ (A) and 0.5 M Li₂SO₄ (B).

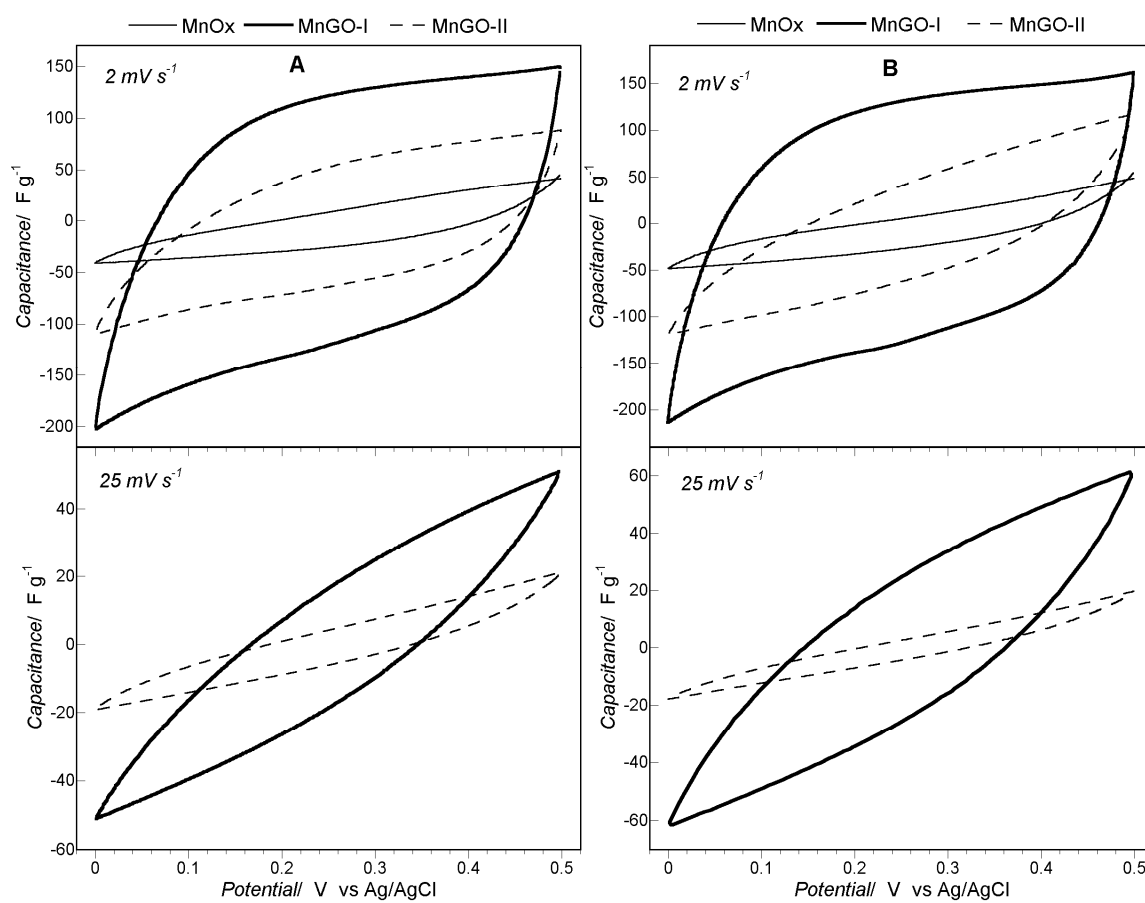


Fig. 3S. Comparison cyclic voltammetry in three-electrode cell for the materials studied in $0.5 \text{ M Na}_2\text{SO}_4$ (A) and $0.5 \text{ M Li}_2\text{SO}_4$ (B).