

Supplementary Figure for:

Temperature imaging of water in a microchannel using thermal sensitivity of near-infrared absorption

Naoto Kakuta, Yuko Fukuhara, Katsuya Kondo, Hidenobu Arimoto and Yukio Yamada

Fig. 6 in a black and white print friendly version

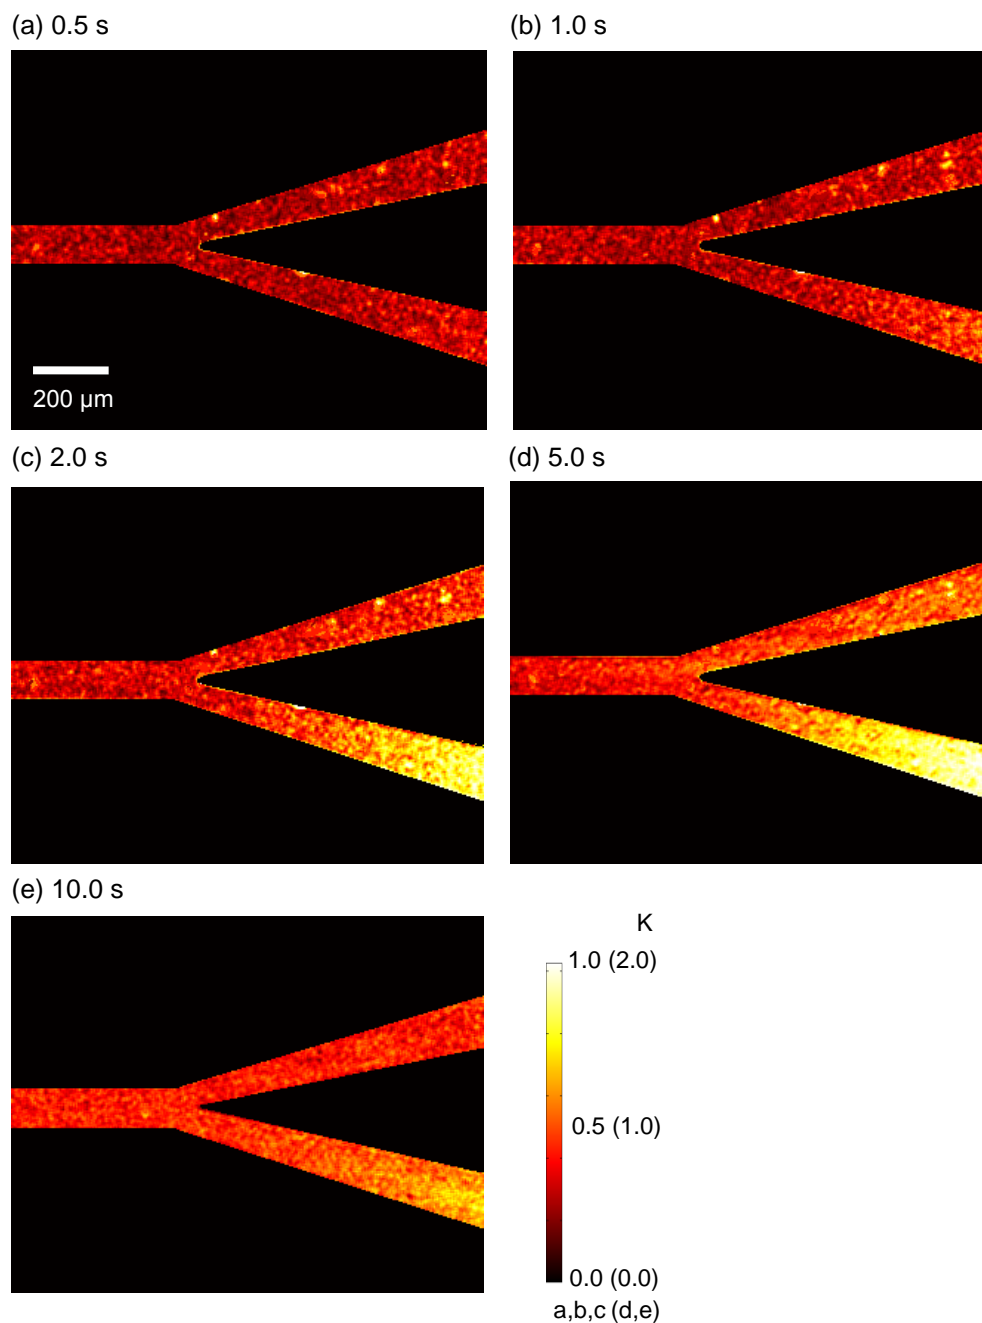


Fig. 6 Images of the temperature difference, ΔT , at (a) 0.5 s, (b) 1.0 s, (c) 2.0 s, (d) 5.0 s, and (e) 10.0 s after the start of 5 s wire heating, where the image at 0 s is the reference. Note that the color-bar indicates two different scales; 0–1 K is for (a), (b), and (c) and 0–2 K (in parentheses) is for (d) and (e).