

## Supporting Information

### Improved lithium storage properties of electrospun TiO<sub>2</sub> with tunable morphology: from porous anatase to necklace rutile


Yang Yang,<sup>a</sup> Haiying Wang,<sup>\*a</sup> Qiwen Zhou,<sup>a</sup> Mengqi Kong,<sup>a</sup> Haitao Ye<sup>b</sup> and Gang Yang<sup>\*a,b</sup>

<sup>a</sup> Jiangsu Laboratory of Advanced Functional Material, Department of Chemistry, Changshu Institute of Technology, Changshu 215500, China.

<sup>b</sup> School of Engineering and Applied Science, Aston University, Birmingham B4 7ET, United Kingdom

Corresponding author. E-mail addresses:

[wangxiaofan2004@yahoo.com.cn](mailto:wangxiaofan2004@yahoo.com.cn) (H.Y. Wang); [gyang@cslg.edu.cn](mailto:gyang@cslg.edu.cn) (G. Yang).

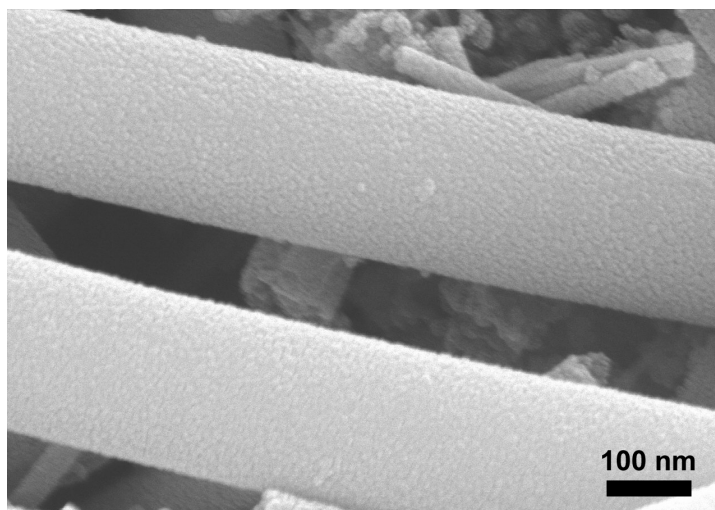

**Fig. S1** SEM image of TiO<sub>2</sub>-500 after 20<sup>th</sup> discharge.