

Electronic Supplementary Information

Size-tunable TiO₂ nanorod microspheres *via* one-pot solvothermal method and used as the scattering layer for dye-sensitized solar cells

Yichuan Rui,^a Yaogang Li,^a Qinghong Zhang^{*ab} and Hongzhi Wang^{*a}

^a State Key Laboratory for Modification of Chemical Fibers and Polymer Materials, Donghua University, Shanghai 201620, P. R. China. E-mail: zhangqh@dhu.edu.cn; Fax: +86-021-67792855; Tel: +86-021-67792943; E-mail: wanghz@dhu.edu.cn; Fax: +86-021-67792855; Tel: +86-021-67792881

^b Engineering Research Center of Advanced Glasses Manufacturing Technology, MOE, Shanghai 201620, P. R. China.

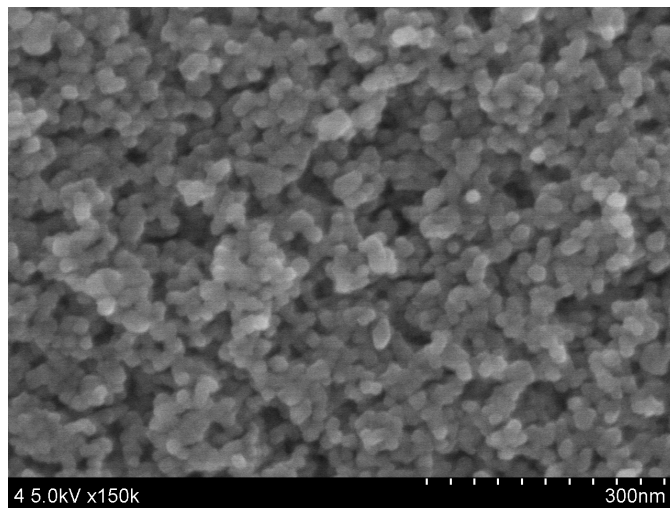


Fig. S1 FESEM image of the TiO₂ nanoparticle (NC).

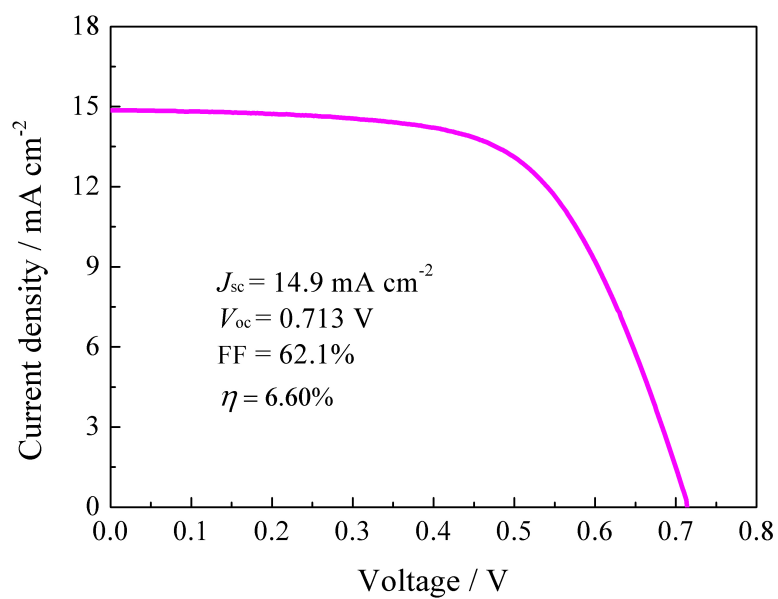


Fig. S2 J – V curve of the DSSC based on nanocrystalline TiO₂ with a film thickness of about 19 μm.