

Supplementary information

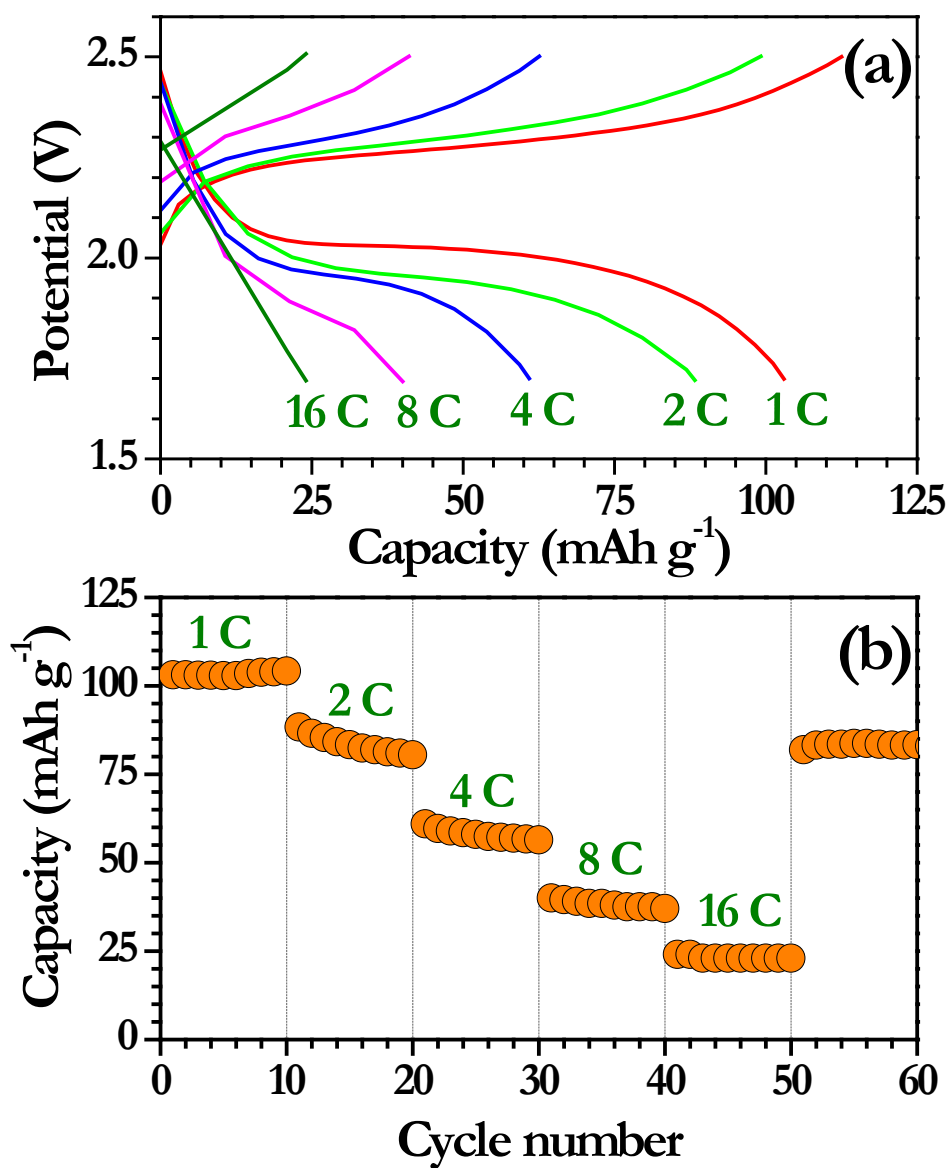


Figure S1. (a) Typical galvanostatic charge-discharge curves of all electrospun $\text{LiMn}_2\text{O}_4/\text{TiO}_2$ full-cell assembly cycled between 1.7-2.5 V at various C rates. Here, 1 C is assumed to be 150 mAh g^{-1} . (b) Rate capability studies of all electrospun $\text{LiMn}_2\text{O}_4/\text{TiO}_2$ cells