

Supplementary Information

Hybrid Organic-Inorganic Heterojunction Solar Cells with 12% Efficiency by Utilizing Flexible Film-Silicon with Hierarchical Surface

Subramani Thiyagu^a, Chen-Chih Hsueh^a, Chien-Ting Liu^a, Hong-Jhang Syu^a, Tzu-Ching Lin^b, and Ching-Fuh Lin^{a, b, c*}

^aGraduate Institute of Photonics and Optoelectronics, National Taiwan University, Taipei 10617, Taiwan (R.O.C.)

^bGraduate Institute of Electronics Engineering, National Taiwan University, Taipei 10617, Taiwan (R.O.C.)

^cDepartment of Electrical Engineering, National Taiwan University, Taipei 10617, Taiwan (R.O.C.)

* Corresponding author. Address: Institute of Photonics and Optoelectronics, National Taiwan University, Taipei, 10617 Taiwan, Republic of China.; Tel: +886-2-33663540; Fax: +886-2-23642603; E-mail address: cflin@cc.ee.ntu.edu.tw

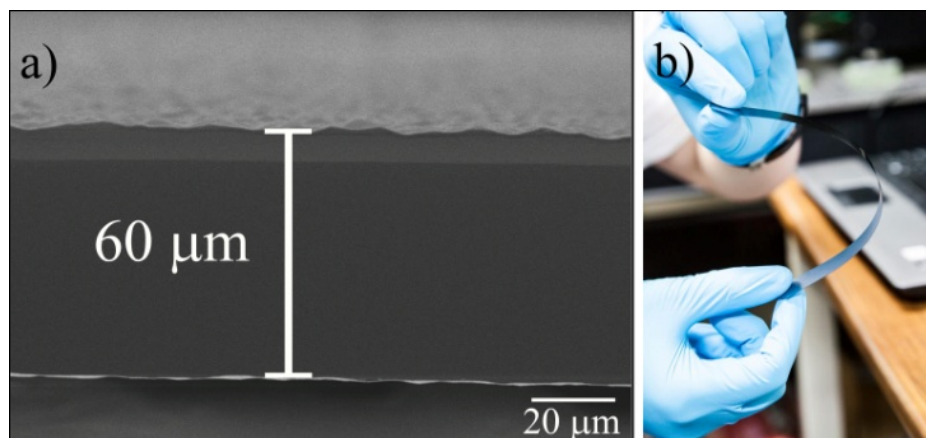


Fig. S1. (a) SEM image of etched thin Si wafer which have a thickness of 60 μm (b) The bending flexibility is demonstrated by hands.