

Supporting information

Erased thin-film optical diode based on a photoresponsive liquid crystal polymer

Xinping Zhang,^{*a} Jian Zhang,^a Yujian Sun,^{bc} Huai Yang,^{*d} and Haifeng Yu^{*d}

^a*Institute of Information Photonics Technology and College of Applied Sciences, Beijing University of Technology, Beijing 100124, P. R. China*

^b*Anshan Normal University, Anshan 114005, Liaoning, China*

^c*School of Materials Science and Engineering, University of Science and Technology Beijing, Beijing 10083, China*

^d*Department of Materials Science and Engineering, College of Engineering, Peking University, Beijing 100871, P. R. China*

*Emails: zhangxinping@bjut.edu.cn, yanghuai@coe.pku.edu.cn, yuhai@pku.edu.cn

The DSC measurements on the LCP is shown in Fig. S1, which shows a glass-transition temperature of about 82 °C and a clearing point at about 139 °C.

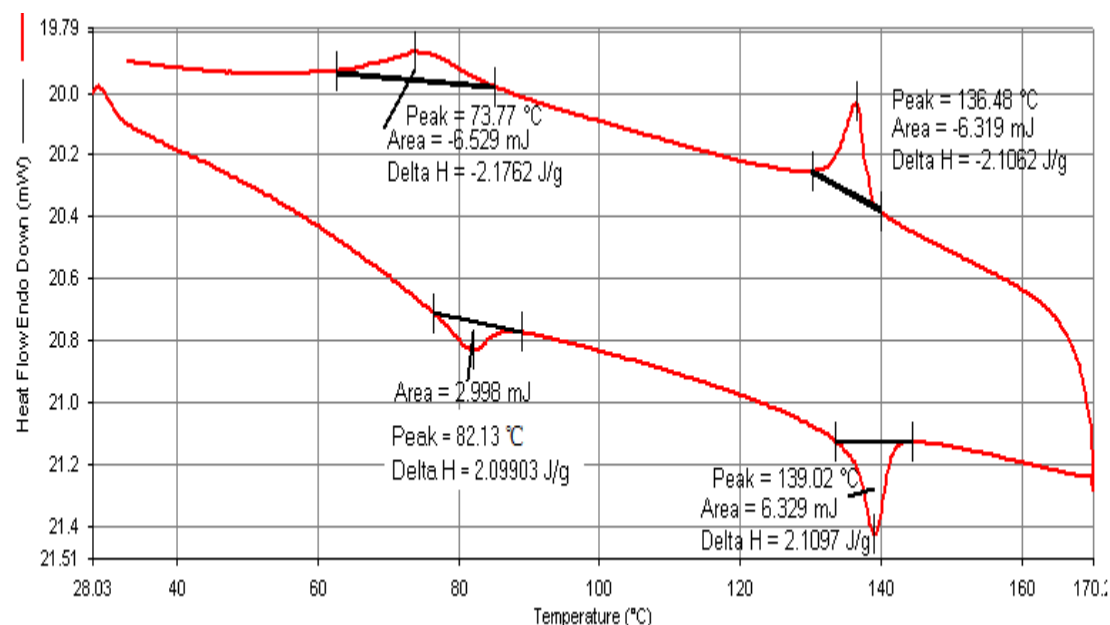


Fig. S1 The DSC measurements on the LCP.