Nanostructured Electrochromic Films by Inkjet Printing On Large Area and Flexible Transparent Silver Electrodes

Michael Layani,[a] Peter Darmawan,[b] Wanling Foo,[b] Liang Liu,[a,b] Alexander Kamyshny,[a] Daniel Mandler,[a] Schlomo Magdassi,[a*] and Pooi See Lee [b*]

*Corresponding Authors:
Assoc. Prof. Pooi See Lee
Email: Pslee@ntu.edu.sg

Prof. Shlomo Magdassi
Email: Magdassi@mail.huji.ac.il

[a] Institute of Chemistry and the Center for Nanoscience and Nanotechnology, The Hebrew University of Jerusalem, Jerusalem, 91904, Israel.

[b] School of Materials Science and Engineering, Nanyang Technological University, N4.1 50 Nanyang Avenue, Singapore 639798, Singapore.

Supporting Information

Transmission data showing that the 72% contrast is achievable with 15 printed layers. The measurements were carried out at wavelength from 350 nm onwards. The 72% is found in Figure S1 at 633 nm wavelength for 15 printed layers of WO_3.

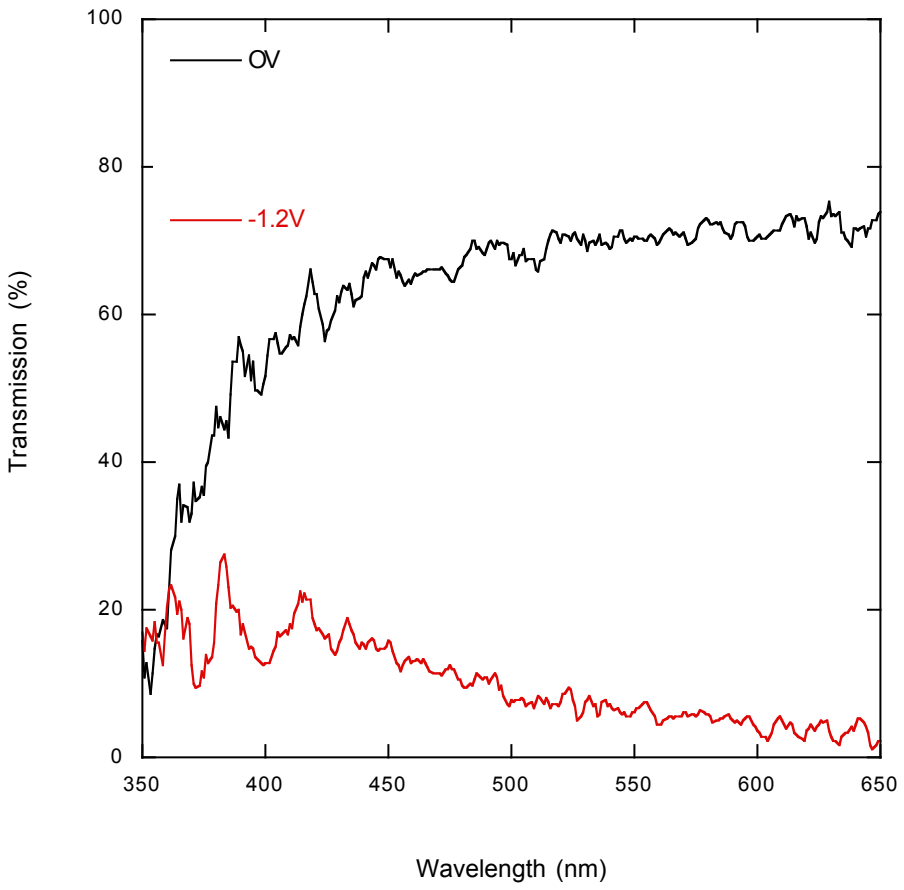

Figure S1. UV-visible light transmission spectra for 15 printed WO_3 layers showing an ~ 72% contrast at 633 nm wavelength