

## Electronic Supplementary Information

### Low-temperature solution-processable Ni(OH)<sub>2</sub> ultrathin nanosheet/N-graphene nanohybrids for high-performance supercapacitor electrodes


Haixin Chang,<sup>a,b\*</sup> Jianli Kang,<sup>a,\*</sup> Luyang Chen,<sup>a</sup> Junqiang Wang,<sup>a</sup> Kazuyo Ohmura,<sup>c</sup> Na Chen,<sup>a</sup>  
Takeshi Fujita,<sup>a</sup> Hongkai Wu,<sup>a,d,\*</sup> Mingwei Chen<sup>a</sup>

<sup>a</sup> WPI-Advanced Institute for Materials Research, Tohoku University, Sendai 980-8577, Japan; E-mail: hxchang@wpi-aimr.tohoku.ac.jp (H.X.C.), jlkangnpm@126.com (J.K.), chhkww@ust.hk (H.W.)


<sup>b</sup> State Key Laboratory of Material Processing and Die & Mould Technology, School of Materials Science and Engineering, Huazhong University of Science and Technology (HUST), Wuhan 430074, China

<sup>c</sup> Institute for Materials Research, Tohoku University, Sendai 980-8578, Japan

<sup>d</sup> Department of Chemistry, The Hong Kong University of Science and Technology, Clear water Bay, Hong Kong;

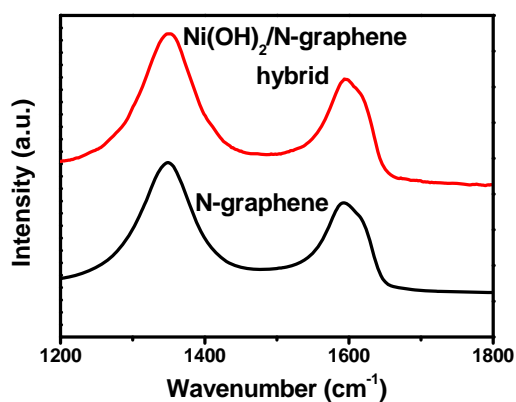

**Figure S1** Raman spectra of N-graphene and Ni(OH)<sub>2</sub>/N-graphene hybrid.

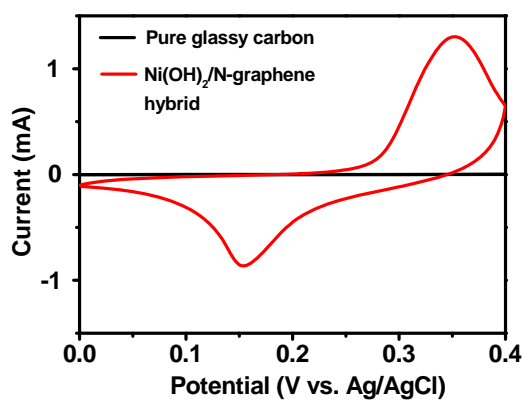

**Figure S2** Cyclic voltammetry of pure glassy carbon electrodes and Ni(OH)<sub>2</sub>/N-graphene hybrid electrodes.