

# Supporting Information


## Electrospun conductive polyaniline–polylactic acid composite nanofibers as counter electrodes for rigid and flexible dye-sensitized solar cells

Shengjie Peng,<sup>\*,ab</sup> Peining Zhu,<sup>c</sup> Yongzhi Wu,<sup>d</sup> Subodh G. Mhaisalkar<sup>a</sup> and Seeram Ramakrishna<sup>\*,ef</sup>

5

Table S1 Band assignments of PANI–PLA and PANI–CSA–PLA composite films.

Wavenumber (cm <sup>-1</sup> )	Assignment
1751	–C=O carbonyl stretch
1588,1480	C=C stretch
1182	C–N stretch
1455	–CH <sub>3</sub> bend
866	C–H stretch
1475,1092,590	doping

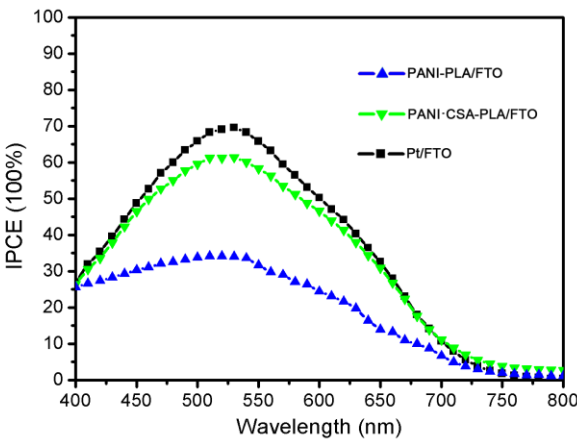

10 **Fig. S1** IPCE curves of the DSCs fabricated with PANI–PLA, PANI–CSA–PLA, and Pt counter electrodes.