

Supplementary Information

Electrochromic properties of ITO nanoparticles/viologen composite film electrodes

Ryota Nakajima,^a Yuya Yamada,^a Toshiki Komatsu,^b Katsuyuki Murashiro,^b Tetsuo Saji^c and
Katsuyoshi Hoshino*^a

^a Graduate School of Advanced Integrated Science, Chiba University, 1-33 Yayoi-cho, Inage-ku, Chiba 263-8522, Japan

^b Ichihara Research Center, JNC Petrochemical Corp., 5-1 Goikaigan, Ichihara, Chiba 290-8551, Japan

^c Department of Chemistry & Materials Science, Tokyo Institute of Technology 2-12-1 S1-9, O-okayama, Meguro-ku 152-8552, Japan

Electrolysis cell.

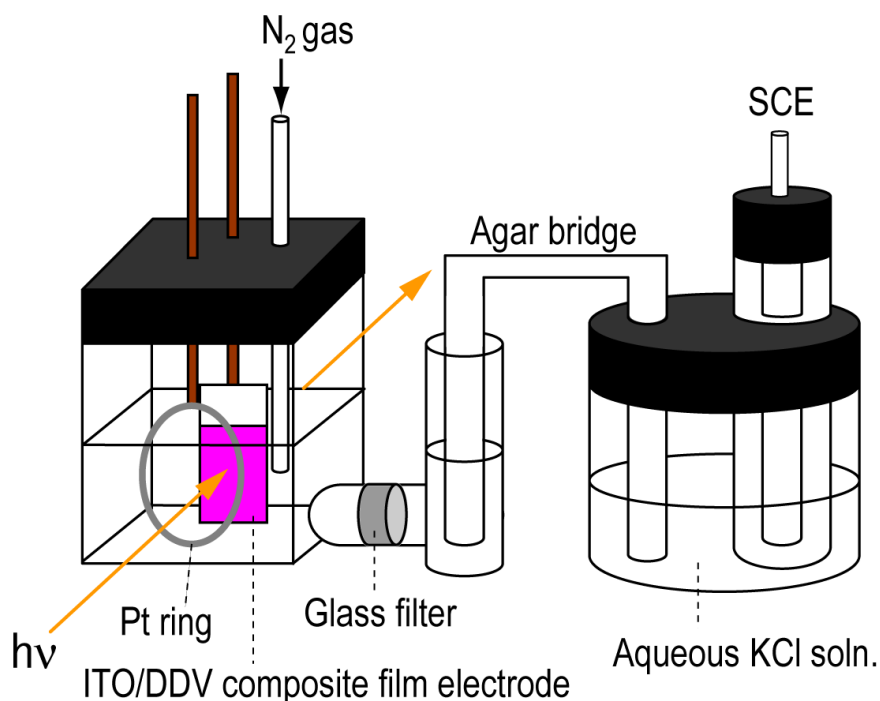


Fig. S1 Electrochemical cell used for the measurements of electrochromic properties of the ITO/DDV composite film electrodes.

Coloration efficiency data.

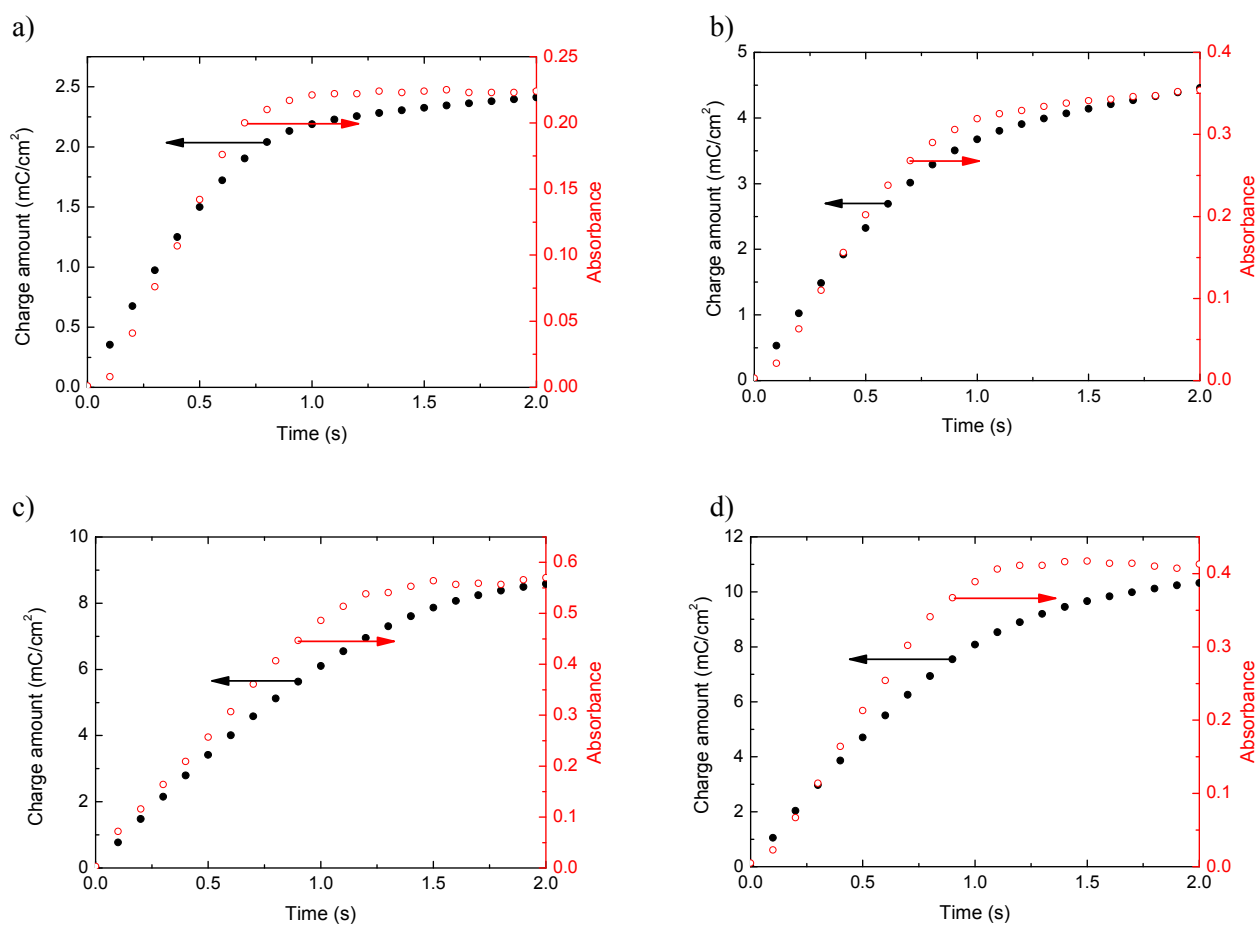


Fig. S2 Dependences of injected charge (●) and absorbance at 510 nm (○) on electrolysis time for the composite film thicknesses of 2 (a), 5 (b), 9 (c) and 13 μm (d).