

Supplementary information

Commercial LiMn_2O_4

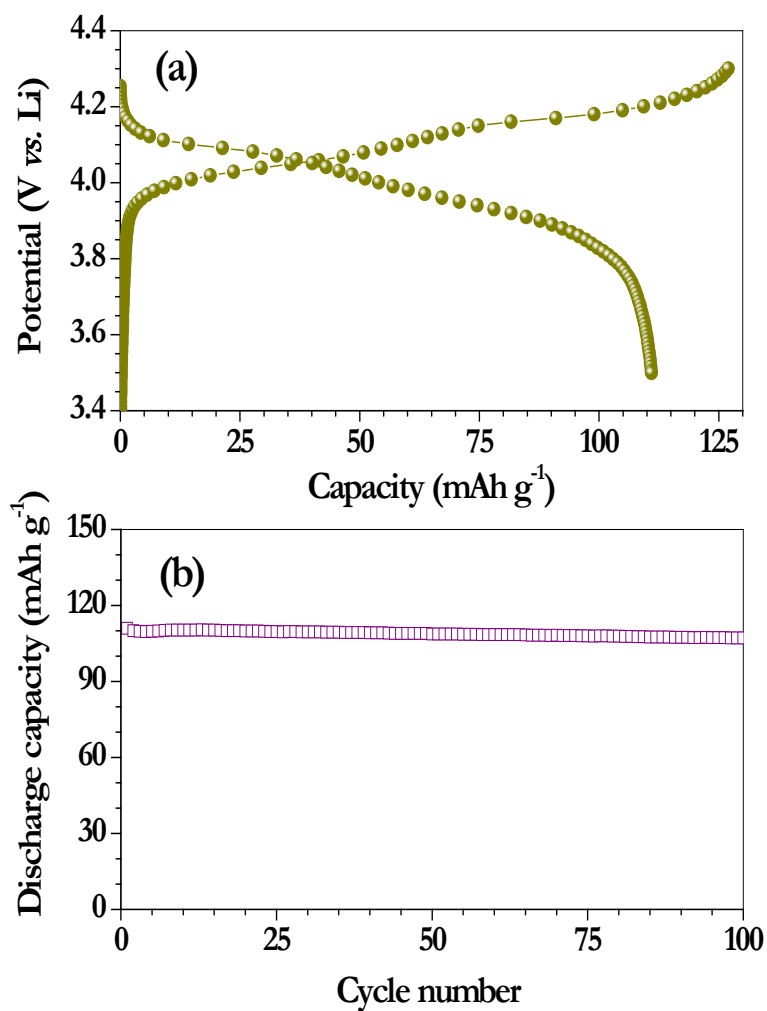


Figure Galvanostatic cycling performance (a) First charge-discharge curves of $\text{Li}/\text{LiMn}_2\text{O}_4$ cell between 3.5-4.3 V at current density of 150 mA g^{-1} and (b) Plot of discharge capacity *vs.* cycle number (100 cycles)