

Supporting Information

Standardization of photoelectrode area of dye-sensitized solar cells

Azhar Fakharuddin,¹ Panikar S. Archana,¹ Zulkeflee Kalidin,² Mashitah M. Yusoff,¹
Rajan Jose^{*1}

¹Nanostructured Renewable Energy Materials Laboratory, Faculty of Industrial Sciences & Technology, ²Faculty of Electrical and Electronics Engineering, Universiti Malaysia Pahang, 26300, Malaysia * Correspondence: rjose@ump.edu.my

Supplementary Information:

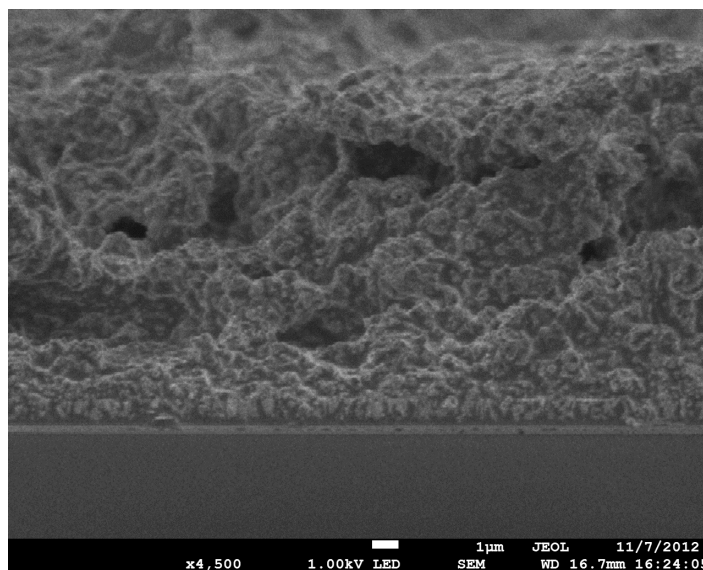


Figure S1: SEM images obtained from the cross section of working electrode (TiO₂ film coated on a glass substrate).

Supporting Information

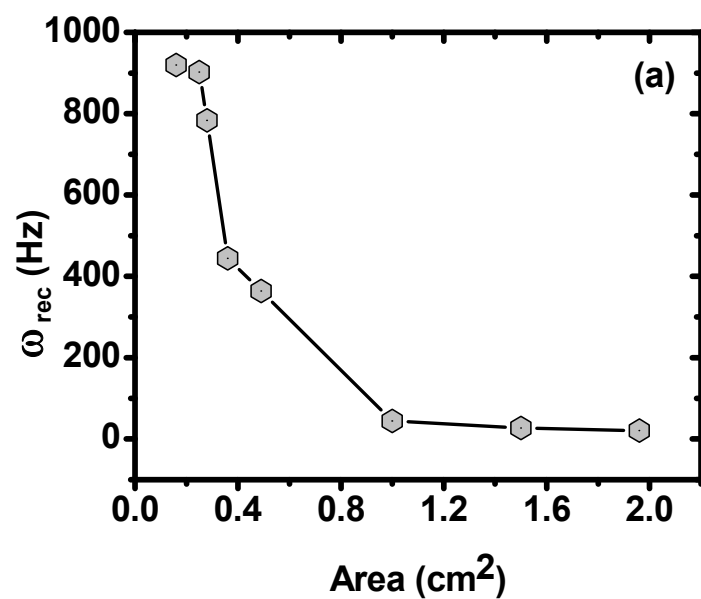


Figure S2: Variation of frequency corresponding to charge recombination as a function of device area.

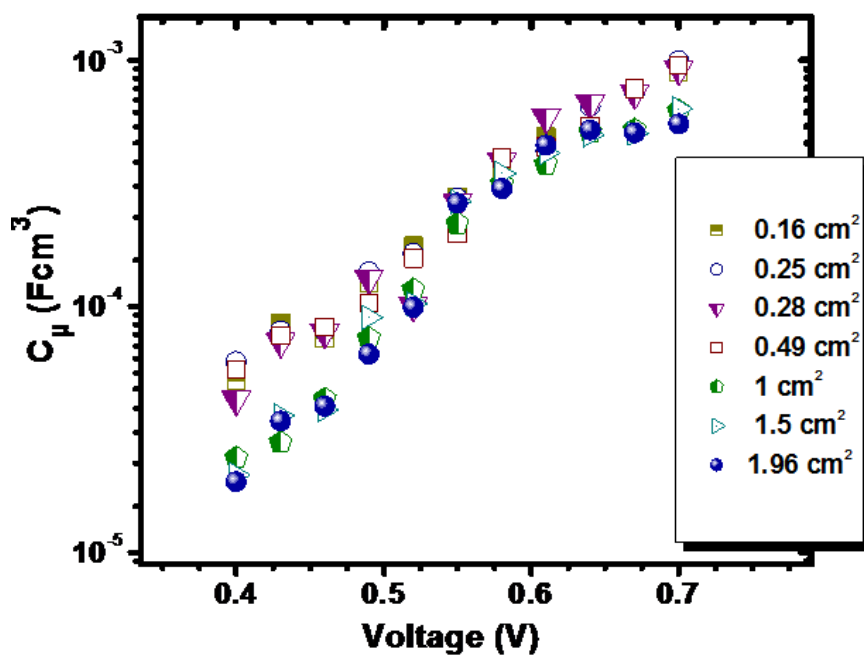


Figure S3: Variation of chemical capacitance of DSCs having different electrode areas.