

Electronic supplementary information

Self-Assembled Graphene@PANI Nanoworm Composites with Enhanced Supercapacitor Performance

Yongsong Luo,^{†a,b,d} Dezhi Kong,^{†a,b} Yonglei Jia,^b Jingshan Luo,^a Yang Lu,^b Deyang Zhang,^b Kangwen Qiu,^b Chang Ming Li^c and Ting Yu^{*a,d,e}

^a*Division of Physics and Applied Physics, School of Physical and Mathematical Sciences, Nanyang Technological University, 637371, Singapore*

^b*Department of Physics & Electronic Engineering, Xinyang Normal University, Xinyang 464000, P. R.China*

^c*Institute for Clean Energy and Advanced Materials, Southwest University, Chongqing 400700, P. R China*

^d*Energy Research Institute at Nanyang Technological University (ERIAN), 639789 Singapore*

^e*Department of Physics, Faculty of Science, National University of Singapore, 117542 Singapore*

* To whom correspondence should be addressed: E-mail: yuting@ntu.edu.sg (T. Yu).

† These authors contribute equally to this work.

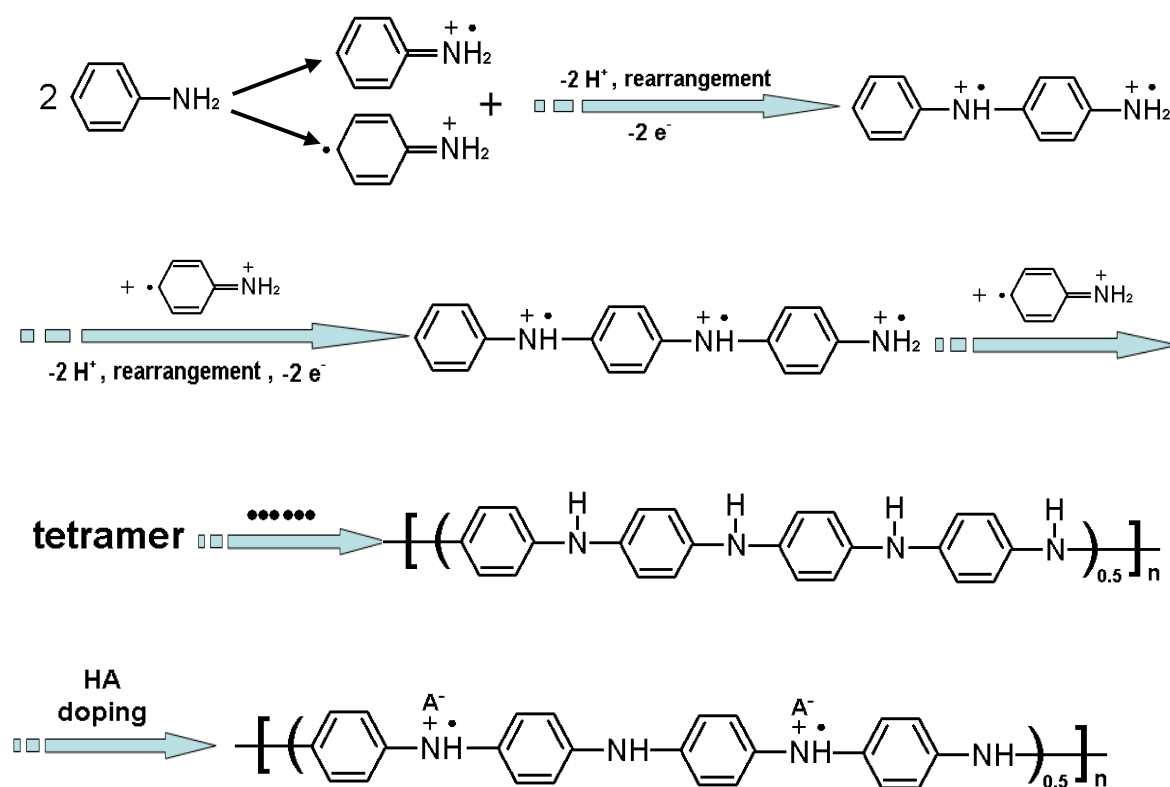


Fig. S1 The polymerization process of polyaniline (PANI).

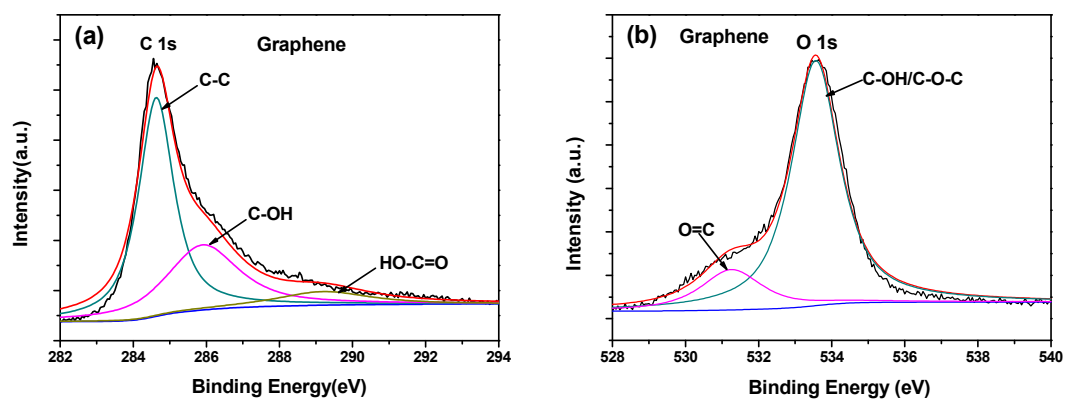


Fig. S2 (a) C1s and (b) O 1s XPS spectrum of the graphene.

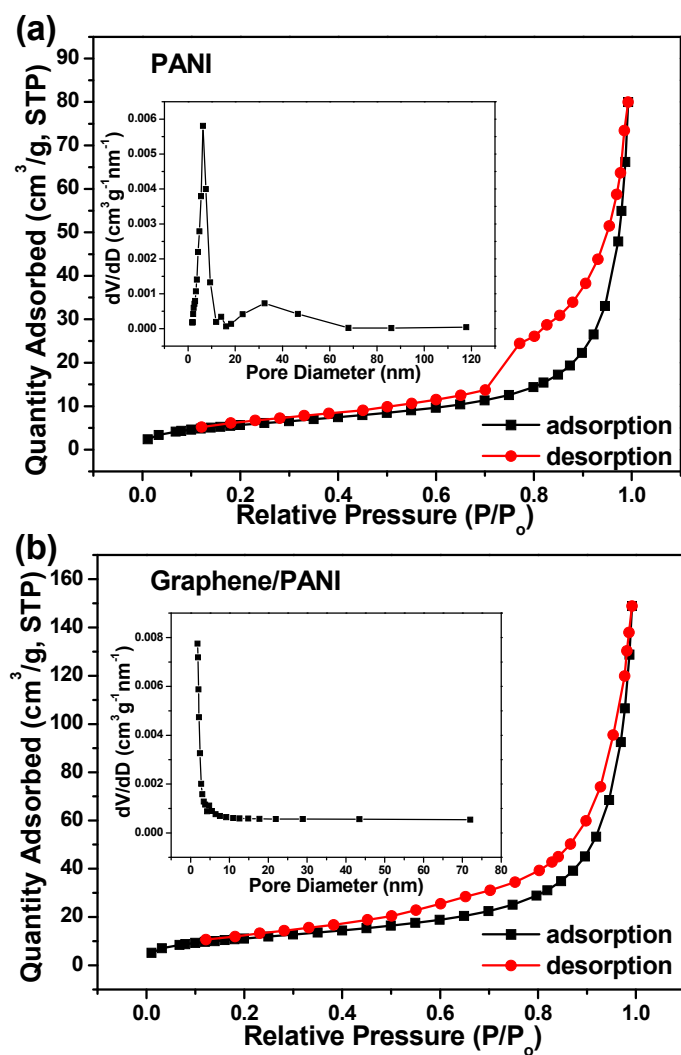


Fig. S3. Nitrogen adsorption-desorption and pore-size distribution isotherm for the obtained (a) PANI and (b) graphene@PANI nanoworms product, respectively.