

Supplementary Information

Physical Properties and Crystallization Behavior of Ethylene-Vinyl Acetate Rubber/Polyamide/Graphene Oxide Thermoplastic Elastomer Nanocomposites

Wenjing Wu^a, Chaoying Wan^b, Shifeng Wang^a, Yong Zhang^{a,*}

^a State Key Laboratory of Metal Matrix Composites, School of Chemistry and Chemical Engineering, Shanghai Jiao Tong University, Shanghai 200240, China;

^b Warwick Manufacturing Group, University of Warwick, UK, CV4 7AL

Correspondence to: Yong Zhang (E-mail: yong_zhang@sjtu.edu.cn)

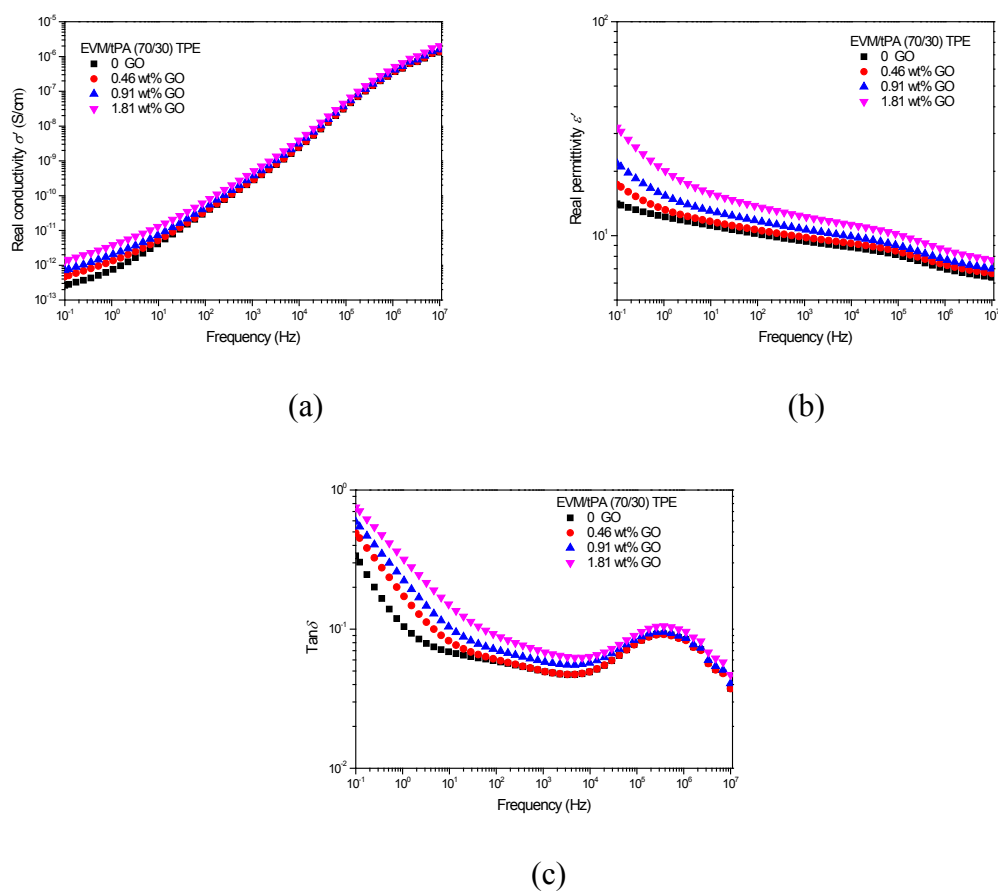


Fig. S1. Dielectric parameters of EVM/tPA/GO composites with various GO contents as a function of frequency at room temperature: (a) Real conductivity, (b) Real permittivity,

and (c) Dielectric loss factor.