

Supporting Information

**Optical trapping enhancement of high density silicon nanohole
and nanowire arrays for efficient hybrid organic-inorganic
solar cells**

Subramani Thiyagu, Hong-Jhang Syu, Chen-Chih Hsueh, Chien-Ting Liu, Tzu-Ching Lin and Ching-Fuh Lin*

^aGraduate Institute of Photonics and Optoelectronics, National Taiwan University, Taipei 10617, Taiwan (R.O.C.)

^bGraduate Institute of Electronics Engineering, National Taiwan University, Taipei 10617, Taiwan (R.O.C.)

^cDepartment of Electrical Engineering, National Taiwan University, Taipei 10617, Taiwan (R.O.C.)

E-mail: lincf@ntu.edu.tw

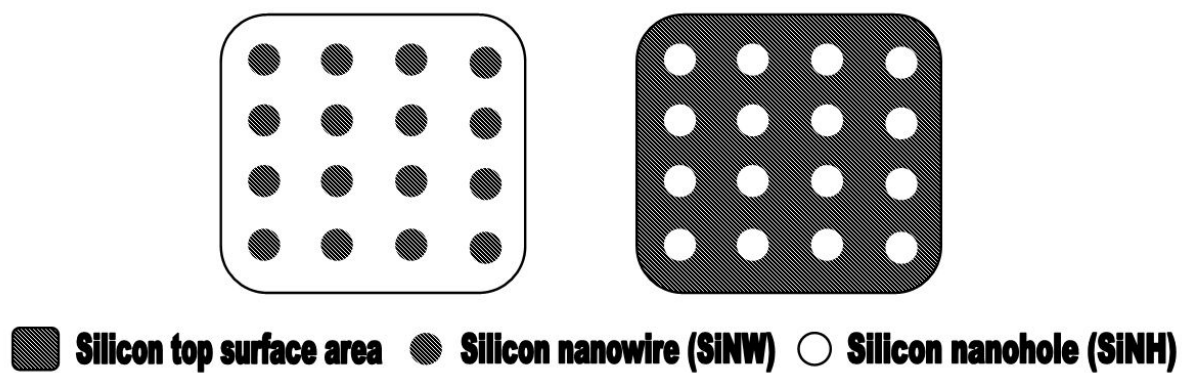


Figure S1. Schematic representation of SiNW and SiNH surface area from the top view. Here, SiNH arrays have higher surface area.