

Electronic Supplementary Information

Graphene/polypyrrole-coated carbon nanofiber core-shell architecture electrode for electrochemical capacitors

**John Kevin Gan,¹ Yee Seng Lim,¹ Alagarsamy Pandikumar,^{1*} Nay Ming Huang,^{1*}
Hong Ngee Lim^{2,3*}**

¹Low Dimensional Materials Research Centre, Department of Physics, Faculty of Science,
University of Malaya, 50603 Kuala Lumpur, Malaysia

²Department of Chemistry, Faculty of Science, Universiti Putra Malaysia,
43400 UPM Serdang, Selangor, Malaysia

³Functional Device Laboratory, Institute of Advanced Technology, Universiti Putra Malaysia,
43400 UPM Serdang, Selangor, Malaysia

Corresponding authors: huangnayming@um.edu.my (Huang N.M.),
janet_limhn@science.upm.edu.my (Lim H.N.) and
pandikumarinbox@gmail.com (Pandikumar. A)

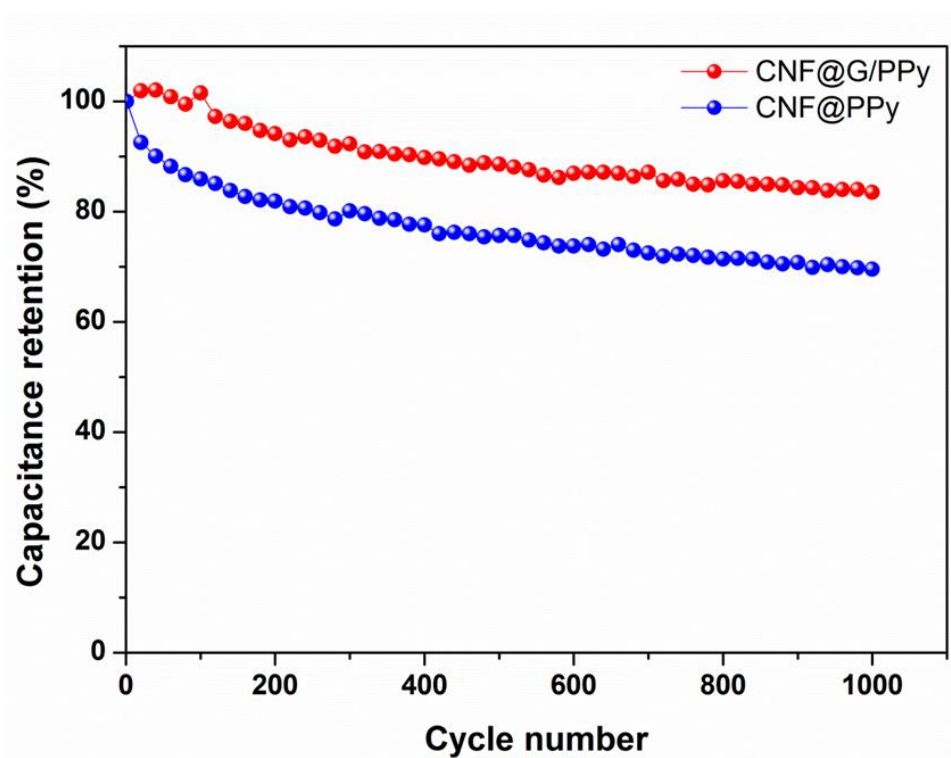


Fig. S1 Comparison of cycling performance of the CNF@PPy and CNF@G/PPy core-shell electrodes at a current densities of 2 A g⁻¹ for 1000 cycles.

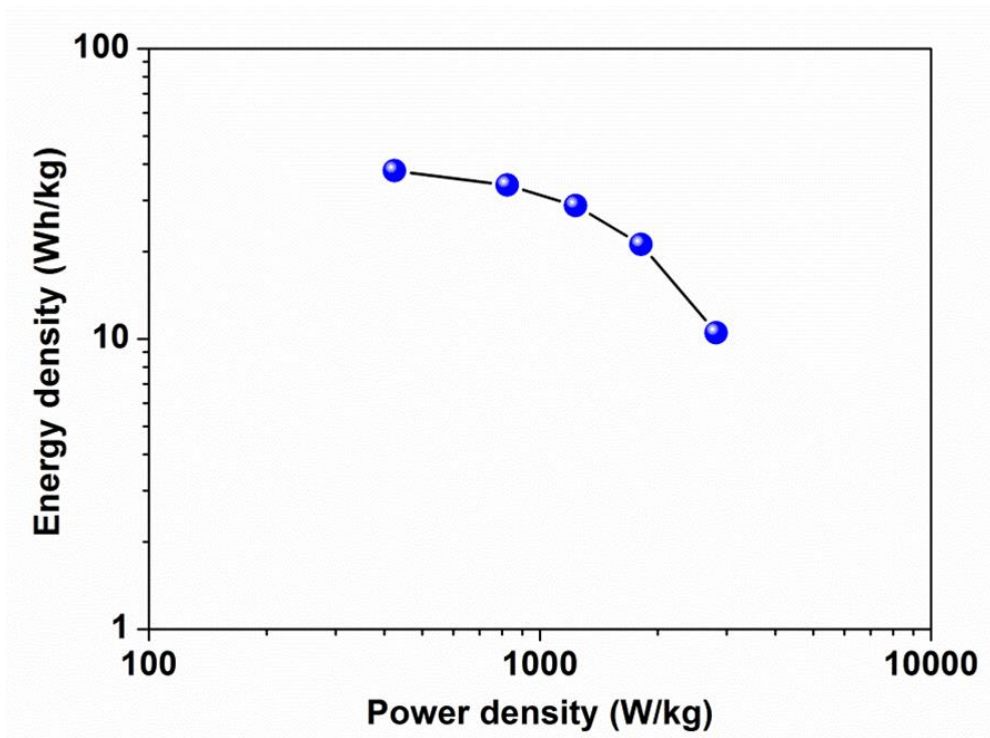


Fig. S2 Ragone plot for the CNF@G/PPy core-shell electrode.