

Supporting information for Ionic liquid electrodeposition of Ge nanostructures on freestanding Ni-nanocone arrays for Li-ion battery

Jian Hao^{‡ a,b}, Xin Liu^{‡ a,d}, Xusong Liu^a, Xiaoxu Liu^a, Na Li^a, Xiaoxuan Ma^a, Yi Zhang^c,

Yao Li^{c*}, Jiupeng Zhao^{a,b*}

^a School of Chemical Engineering and Technology, Harbin Institute of Technology, 150001, Harbin, China Fax: 086 45186402345; Tel: 086 451 86402345; E-mail: jiupengzhao@126.com.

^b State Key Laboratory of Advanced Welding and Joining, Harbin Institute of Technology, Harbin 150001, China.

^c Center for Composite Material, Harbin Institute of Technology, Harbin, China. Fax: 086 45186402345; Tel: 086 451 86402345; E-mail: liyao@hit.edu.cn.

^d Shanghai Institute of Applied Physics, Chinese Academy of Sciences Shanghai 201800, China.

**To whom correspondence should be addressed. E-mail: jiupengzhao@126.com; liyao@hit.edu.cn*

‡ These two authors contributed equally to this work.

Figures

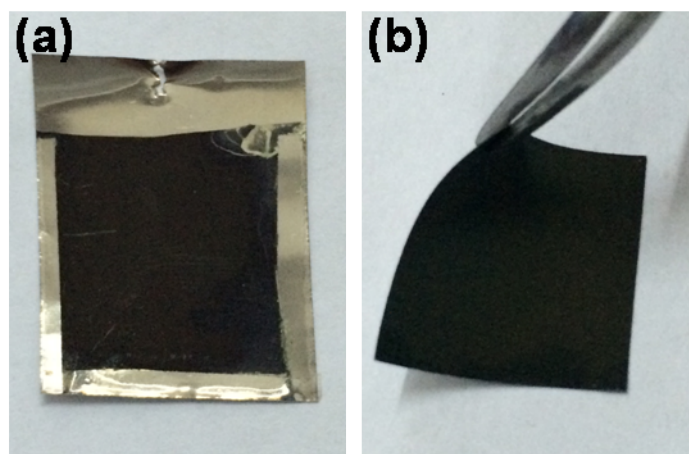


Fig. S1. The photos of Ge-NCA/Ni film (a) and the freestanding Ge-NCA (b).

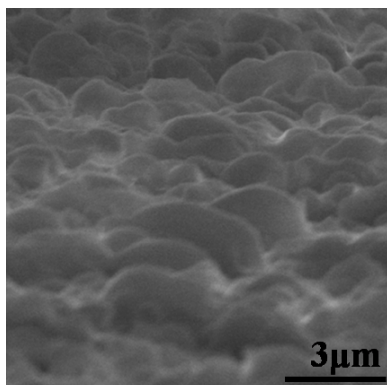


Fig. S2 SEM images of Ge-NCAs electrodes after 100 cycles at a rate of 0.1 C