

Electrospinning Lead-free $0.5\text{Ba}(\text{Zr}_{0.2}\text{Ti}_{0.8})\text{O}_3\text{-}0.5(\text{Ba}_{0.7}\text{Ca}_{0.3})\text{TiO}_3$ Nanowires and Their Application in Energy Harvesting

Weiwei Wu,^a Li Cheng,^a Suo Bai,^a Wei Dou,^a Qi Xu,^a Zhiyang Wei,^a Yong Qin,^{*,a,b}

^a Institute of Nanoscience and Nanotechnology, Lanzhou University, Lanzhou 730000, China.

^b Beijing Institute of Nanoenergy and Nanosystems, Chinese Academy of Sciences, Beijing 100085, China.

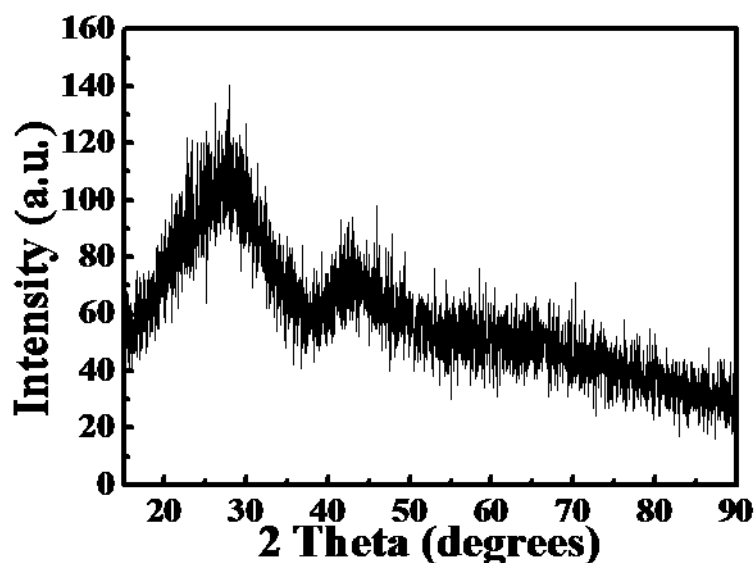


Figure S1: The XRD pattern of samples that is sintered at 440 °C.

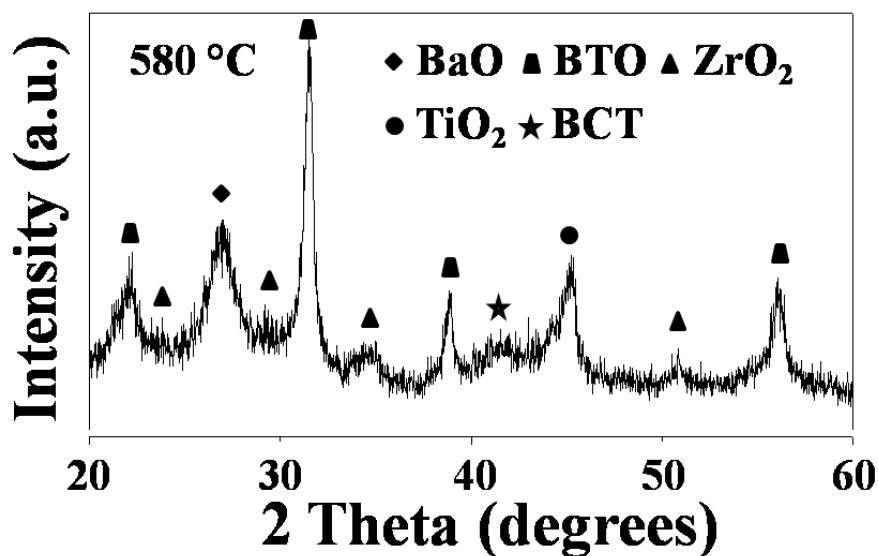


Figure S2: The XRD pattern of samples that is sintered at 580 °C.

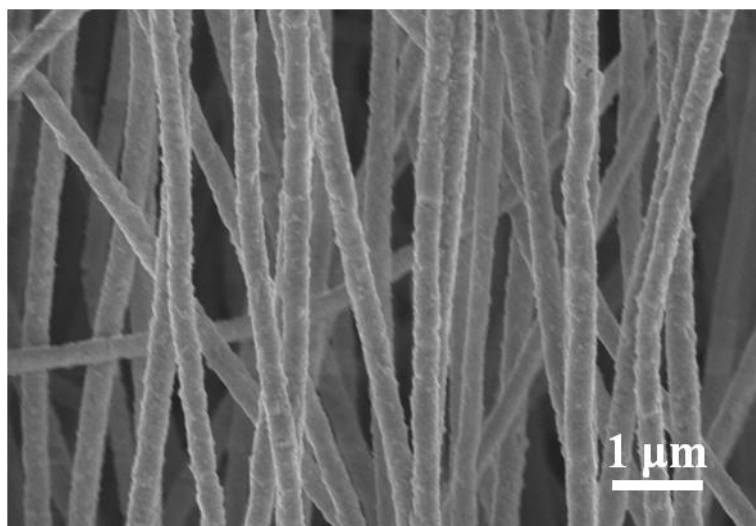


Figure S3: SEM image of the aligned BZT-BCT nanowires.