

Copper Germanate Nanowires/Reduced Graphene Oxide Anode Materials for High Energy Lithium-Ion Batteries

Zhe Chen ^{a,b}, Yang Yan ^{a,b}, Sen Xin ^{a,b}, Wei Li ^{a,b}, Jin Qu ^{a,b}, Yu-Guo Guo ^{*a} and Wei-Guo Song ^{*a}

^aBeijing National Laboratory for Molecular Sciences (BNLMS) & Key Laboratory for Molecular Nanostructures and Nanotechnology, Institute of Chemistry, Chinese Academy of Sciences, Beijing, 100190, P. R. China. Tel & Fax:

+86-10-62557908; E-mail: wsong@iccas.ac.cn;

E-mail: yguo@iccas.ac.cn;

^bUniversity of Chinese Academy of Sciences, Beijing, 100049, P. R. China.

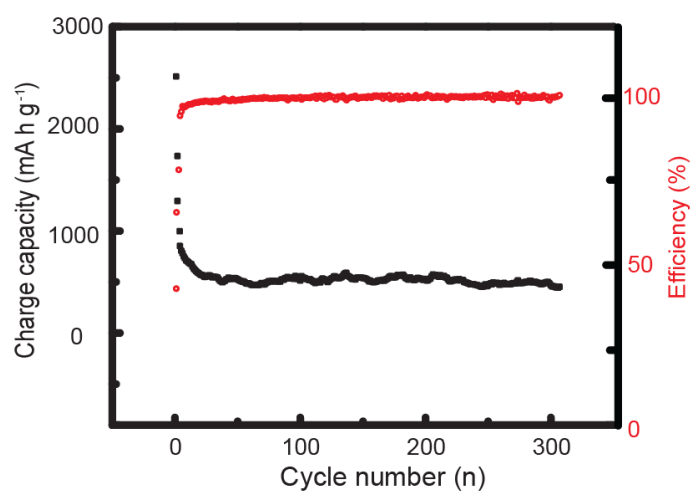


Figure S1 Cycling performance of the CuGeO₃@RGO anode at 2A g⁻¹

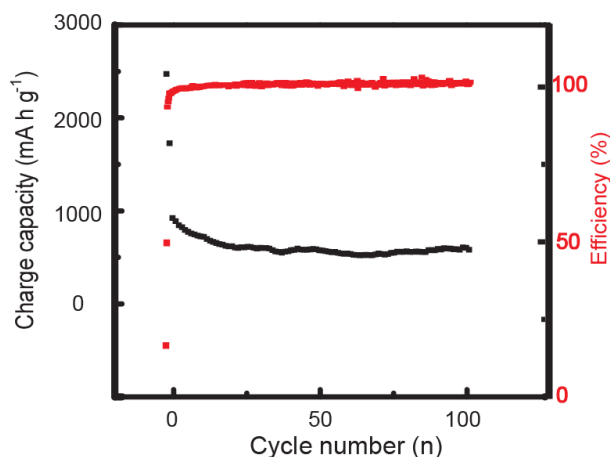


Figure S2 Cycling performance of the CuGeO₃ anode at 100mA g⁻¹

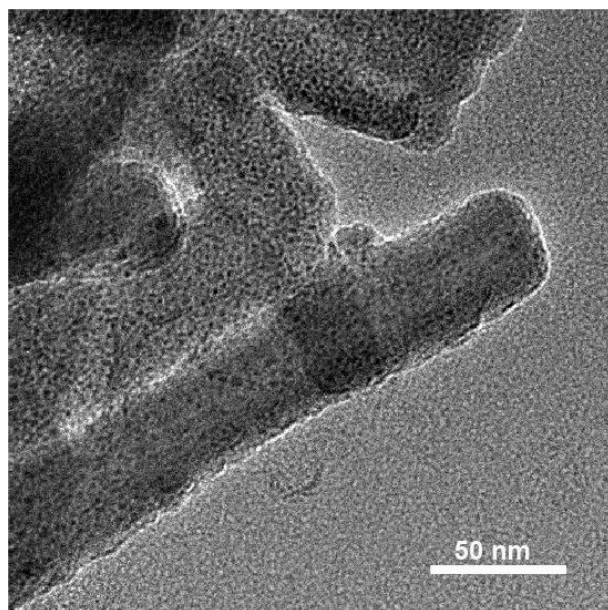


Figure S3 TEM of the CuGeO_3 @RGO nanowires after 300 cycles.