

Supporting Information

Efficient Polymer Solar Cells with a Solution-Processed and Thermal-annealing-free RuO₂ Anode Buffer Layer

Fuzhi Wang¹, Qi Xu¹, Zhan'ao Tan^{1,*}, Liangjie Li¹, Shusheng Li¹, Xuliang Hou¹,

Gang Sun¹, Xiaohe Tu¹, Jianhui Hou², Yongfang Li^{2,*}

Corresponding Author

*E-mail: tanzhanao@ncepu.edu.cn (Z. A. Tan); liyf@iccas.ac.cn (Y. F. Li)

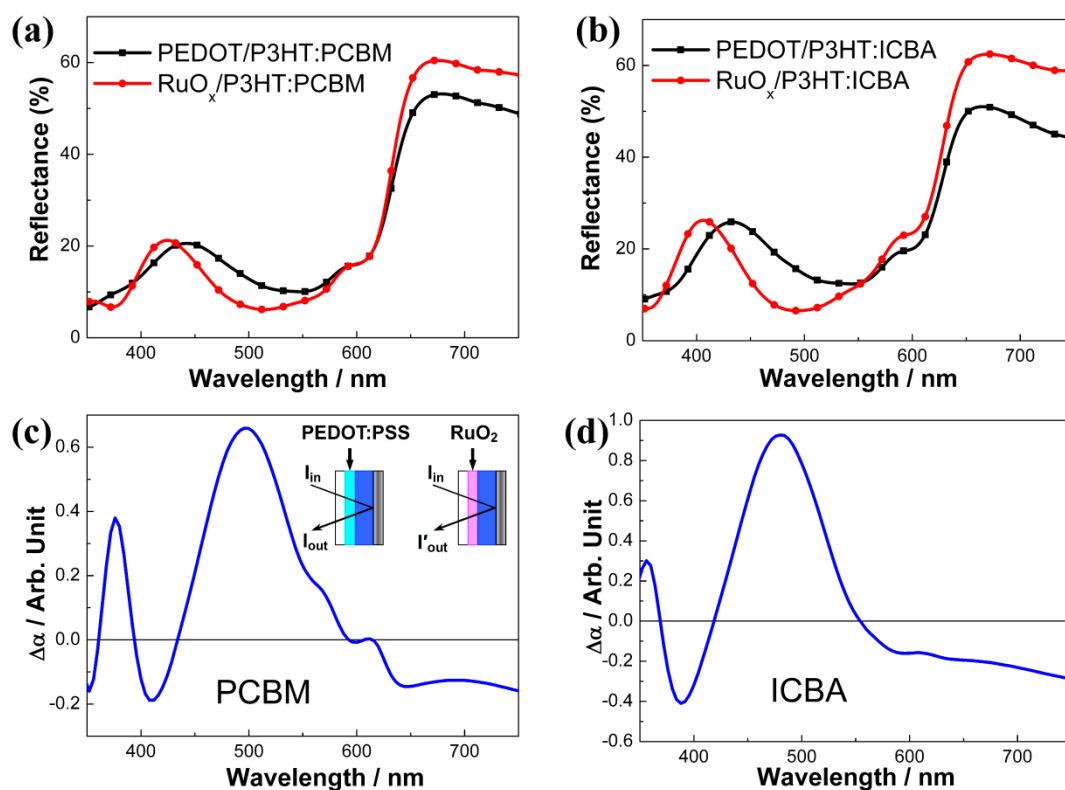


Figure S1. Reflectance spectra of RuO₂ and PEDOT:PSS modified PSCs based on (a) P3HT:PCBM, and (b) P3HT:ICBA. The change in the absorption spectrum, calculated from the reflectance spectra of PSCs based on (c) P3HT:PCBM, and (d) P3HT:ICBA.