

N-doped porous carbon capsules with tunable porosity for high-performance supercapacitors

G.A. Ferrero, A. B. Fuentres, M. Sevilla*

Instituto Nacional del Carbón (CSIC), P.O. Box 73, Oviedo 33080, Spain

* Corresponding autor: martasev@incar.csic.es

Supporting Information

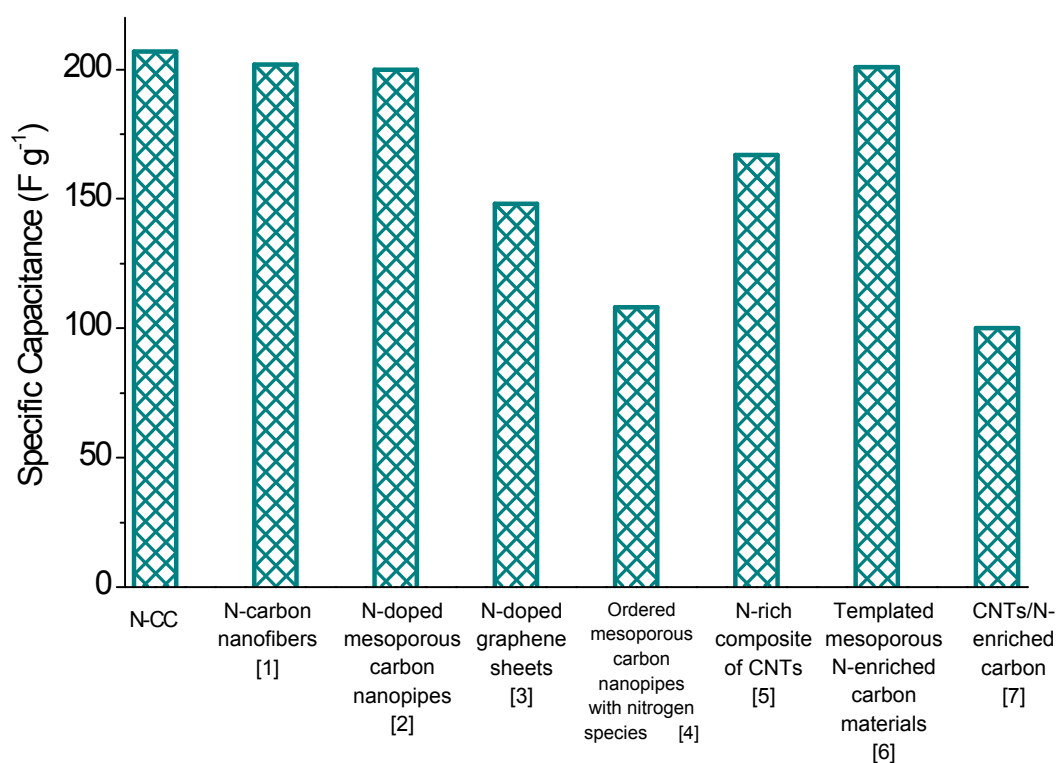


Figure S1. Comparison of the gravimetric capacitance values at 1 A g⁻¹ of the N-CC with those of nitrogen-doped carbons reported in the literature at low scan rates (1 mV s⁻¹) / low discharge current (0.1 A g⁻¹ or 1 A g⁻¹) in H₂SO₄. The values of ref. [1] and [3] were measured in 6 M KOH electrolyte.

References

- 1 L.-F. Chen, X.-D. Zhang, H.-W. Liang, M. Kong, Q.-F. Guan, P. Chen, Z.-Y. Wu and S.-H. Yu, *ACS Nano*, 2012, **6**, 7092-7102.
- 2 W. Kim, J. B. Joo, N. Kim, S. Oh, P. Kim and J. Yi, *Carbon*, 2009, **47**, 1407-1411.
- 3 J. W. Lee, J. M. Ko and J.-D. Kim, *Electrochim. Acta*, 2012, **85**, 459-466.
- 4 W. Kim, M. Y. Kang, J. B. Joo, N. D. Kim, I. K. Song, P. Kim, J. R. Yoon and J. Yi, *J. Power Sources*, 2010, **195**, 2125-2129.
- 5 G. Lota, K. Lota and E. Frackowiak, *Electrochem. Commun.*, 2007, **9**, 1828-1832.
- 6 E. Frackowiak, G. Lota, J. Machnikowski, C. Vix-Guterl and F. Béguin, *Electrochim. Acta*, 2006, **51**, 2209-2214.
- 7 F. Béguin, K. Szostak, G. Lota and E. Frackowiak, *Adv. Mater.*, 2005, **17**, 2380-2384.