

Supporting Materials for

Polyaniline Stabilized Barium Titanate Nanoparticles Reinforced Epoxy Nanocomposites with High Dielectric Permittivity and Reduced Flammability

Xi Zhang,^{1,2} Qingliang He,^{1,2} Hongbo Gu,^{1,2} Suying Wei^{2,*} and Zhanhu Guo^{1,*}

**¹Integrated Composites Laboratory (ICL)
Dan F Smith Department of Chemical Engineering
Lamar University, Beaumont, TX 77710 USA**

**²Department of Chemistry and Biochemistry
Lamar University, Beaumont, TX 77710 USA**

* Corresponding author:

Email: zhanhu.guo@lamar.edu; Phone: (409) 880-7654 (Z. G.)

Email: suying.wei@lamar.edu; Phone: (409) 880-7976 (S. W.)

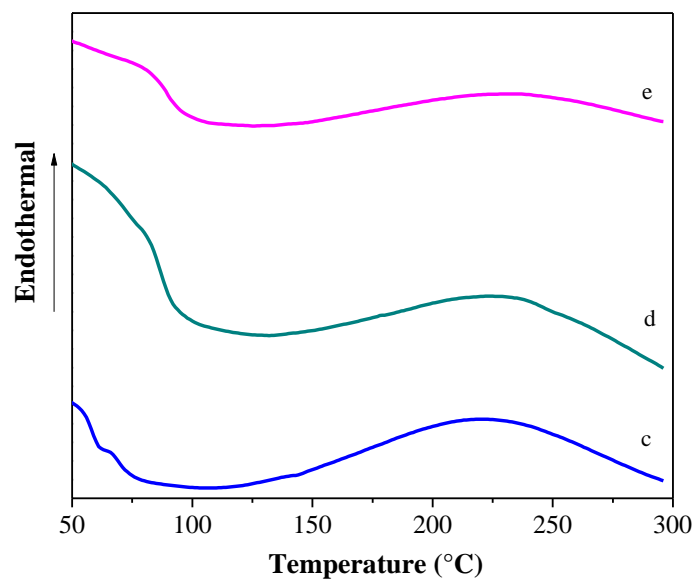


Fig. S1 DSC curves of the cured PNCs with (c) 1.0 wt% BaTiO₃ (500 nm), (d) 5.0 wt% BaTiO₃ (500 nm), and (e) 10.0 wt% BaTiO₃ (500 nm).