

Supporting Information

Prediction of Gastric Cancer by Machine Learning Integrated with Mass Spectrometry-based *N*-glycomics

Deniz Baran Demirhan¹, Hakan Yilmaz¹, Harun Erol², Hacı Mehmet Kayili^{1} Bekir Salih^{3*}*

¹Medical Engineering Department, Faculty of Engineering, Karabük University, 78000-Karabük, TURKEY.

²Pathology Department, Faculty of Medicine, Karabük University, 78000-Karabük, TURKEY.

³Chemistry Department, Faculty of Science, Hacettepe University, 06800-Ankara, TURKEY.

Corresponding Authors

* h.mehmetkayili@karabuk.edu.tr and bekir@hacettepe.edu.tr

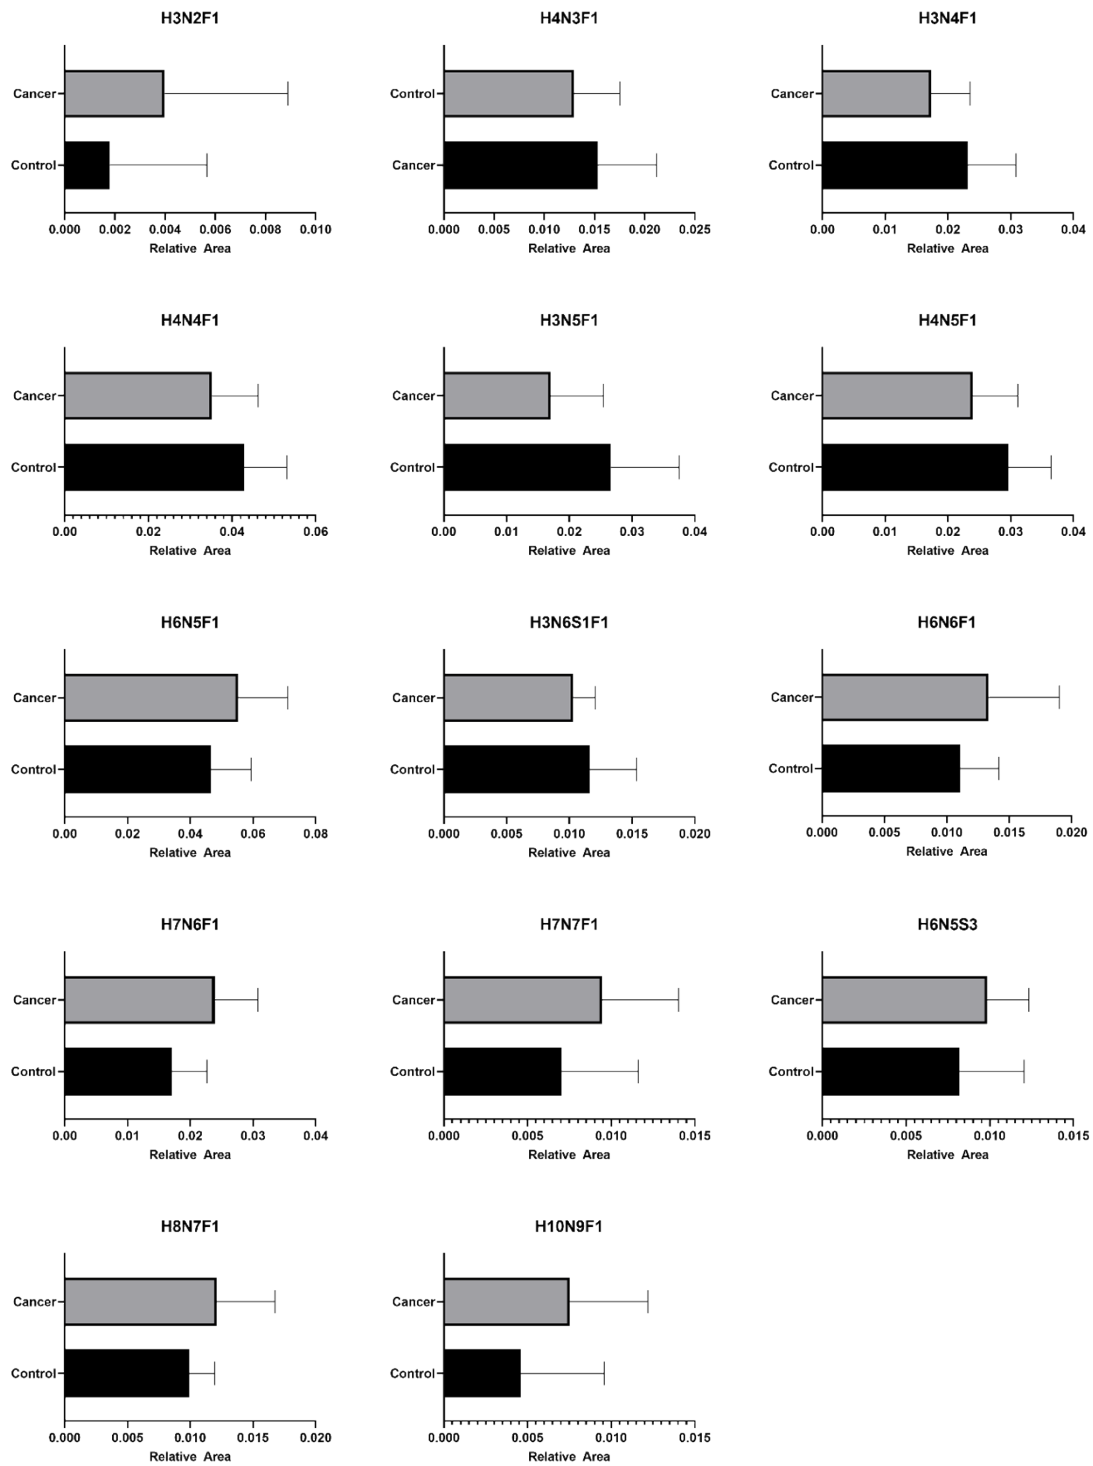


Figure S1. Box graph of differentially expressed *N*-glycans in gastric cancer.

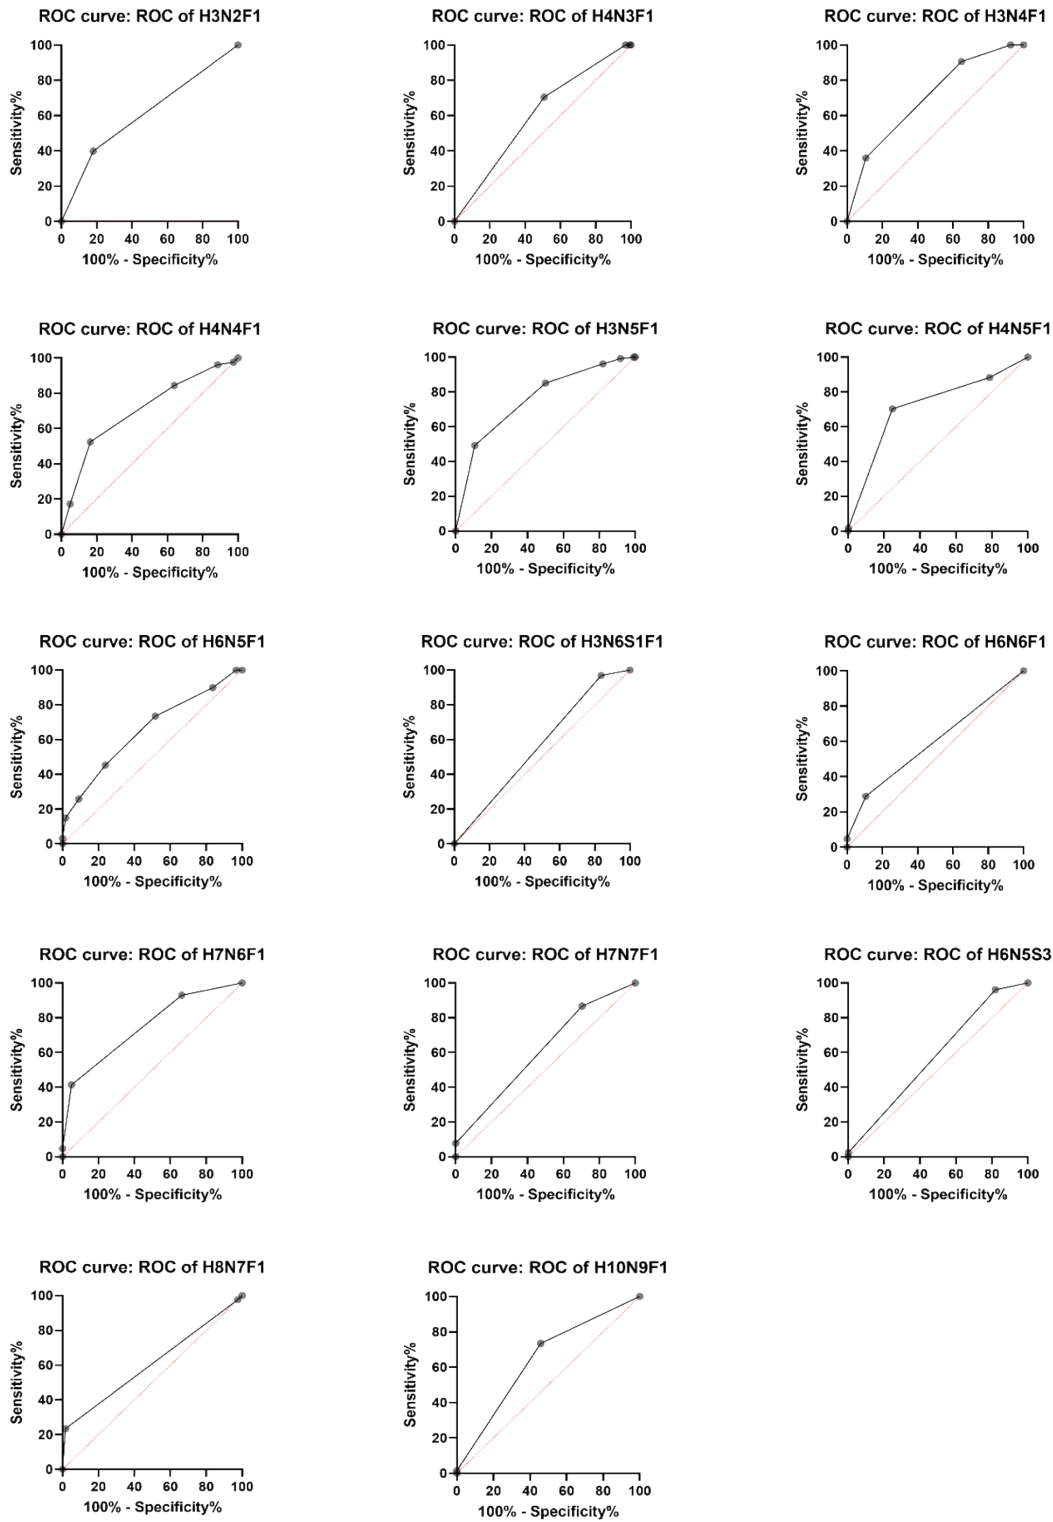


Figure S2. ROC curve analysis of differentially expressed N-glycans.

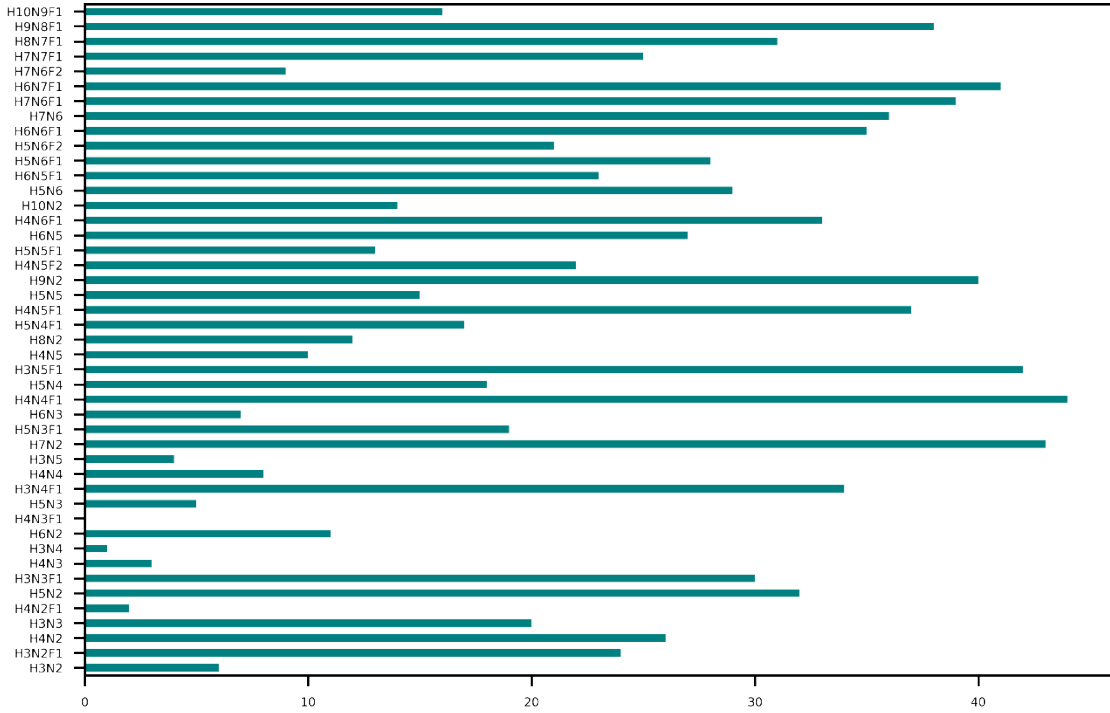


Figure S3. Fisher scores of the *N*-glycan dataset (relative area of neutral glycans).

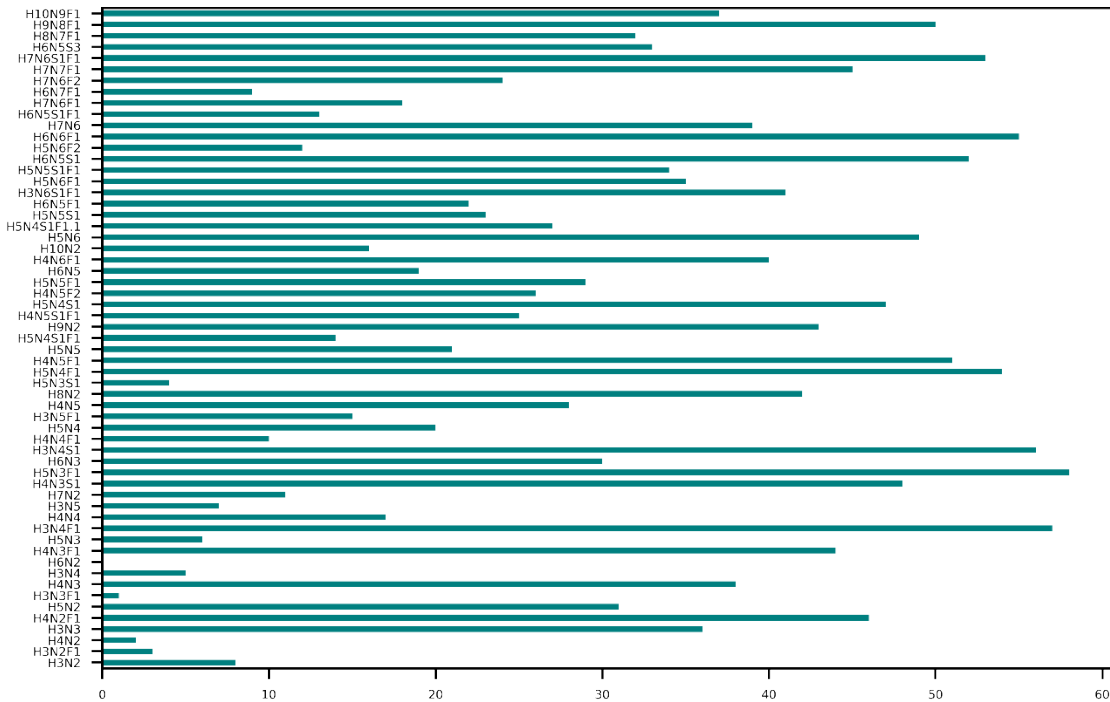


Figure S4. Fisher scores of the *N*-glycan dataset (relative area of whole glycans).

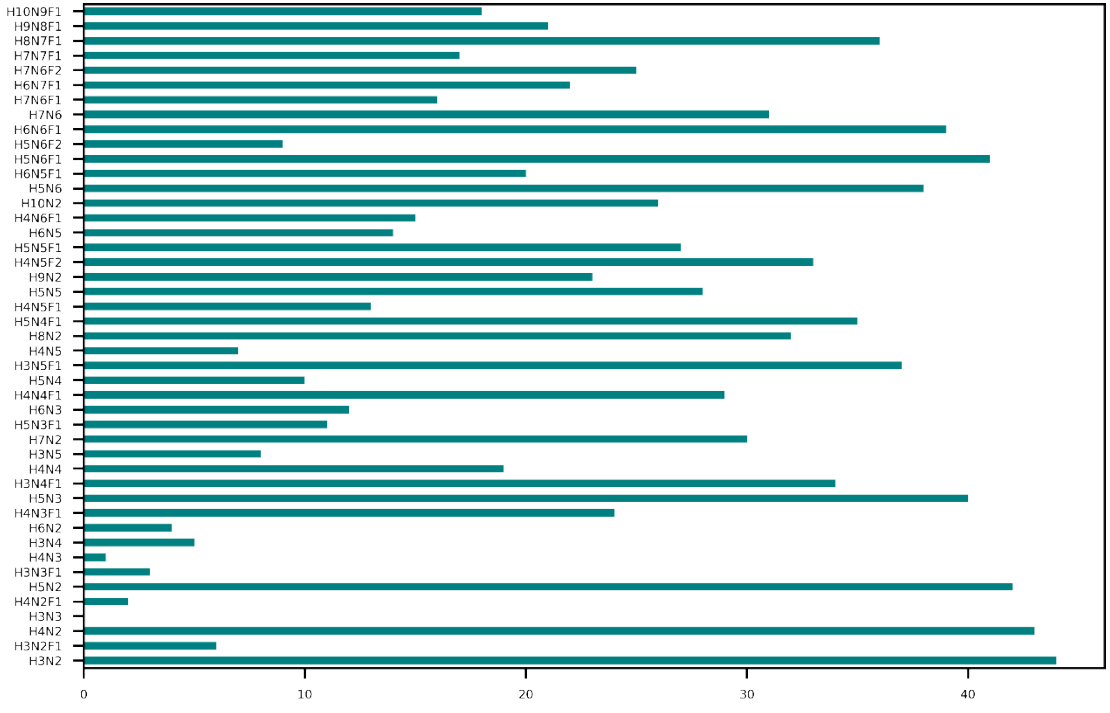


Figure S5. Fisher scores of the *N*-glycan dataset (analyte area of neutral glycans).

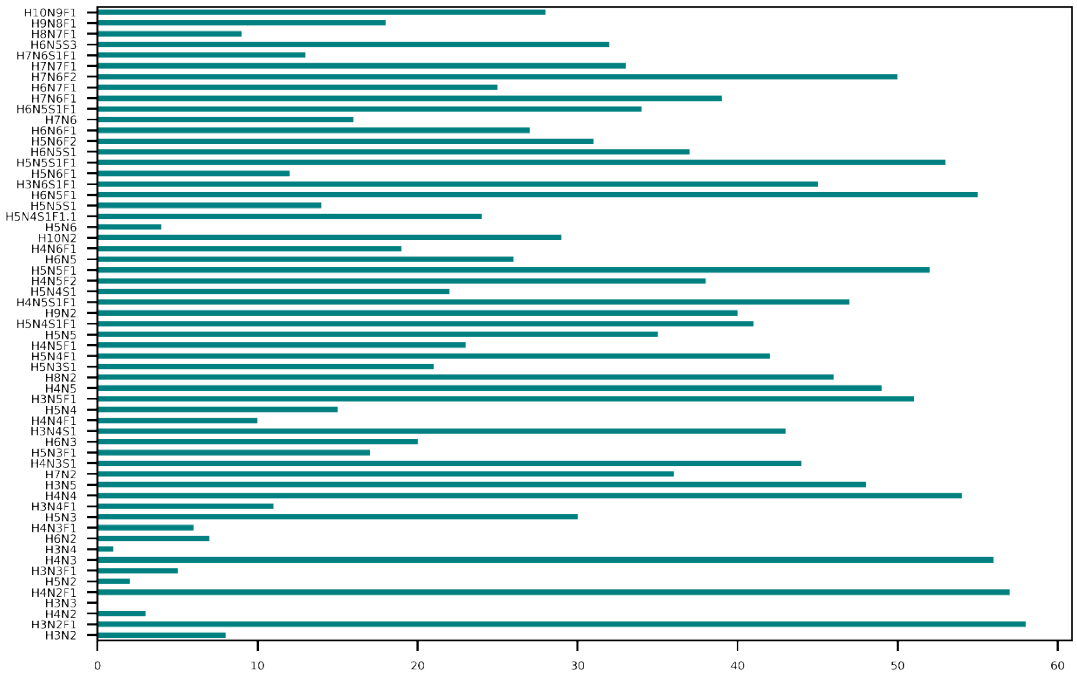


Figure S6. Fisher scores of the *N*-glycan dataset (analyte area of whole glycans).