

Organ-targeted high-throughput *in vivo* biologics screen identifies vehicles for RNA delivery

Tsung-Yao Chang^{1*}, Peng Shi^{2**}, Joseph D. Steinmeyer¹, Itthi Chatnuntawech¹, Paul Tillberg¹,

Kevin T. Love³, Peter M. Eimon¹, Daniel G. Anderson³, Mehmet Fatih Yanik^{1,4,†}


¹Department of Electrical Engineering and Computer Science, Massachusetts Institute of Technology, Cambridge, Massachusetts, USA. ²Department of Mechanical and Biomedical Engineering, City University of Hong Kong, Hong Kong, China. ³Department of Chemical Engineering, Institute of Medical Engineering and Science, Division of Health Science and Technology, David H. Koch Institute for Integrative Cancer Research, Massachusetts Institute of Technology, Cambridge, Massachusetts, USA. ⁴Broad Institute, Cambridge, USA.

*These authors contributed equally to this work.


†Correspondence should be addressed to

Dr. Mehmet Fatih Yanik, yanik@mit.edu


Dr. Peng Shi, pengshi@cityu.edu.hk

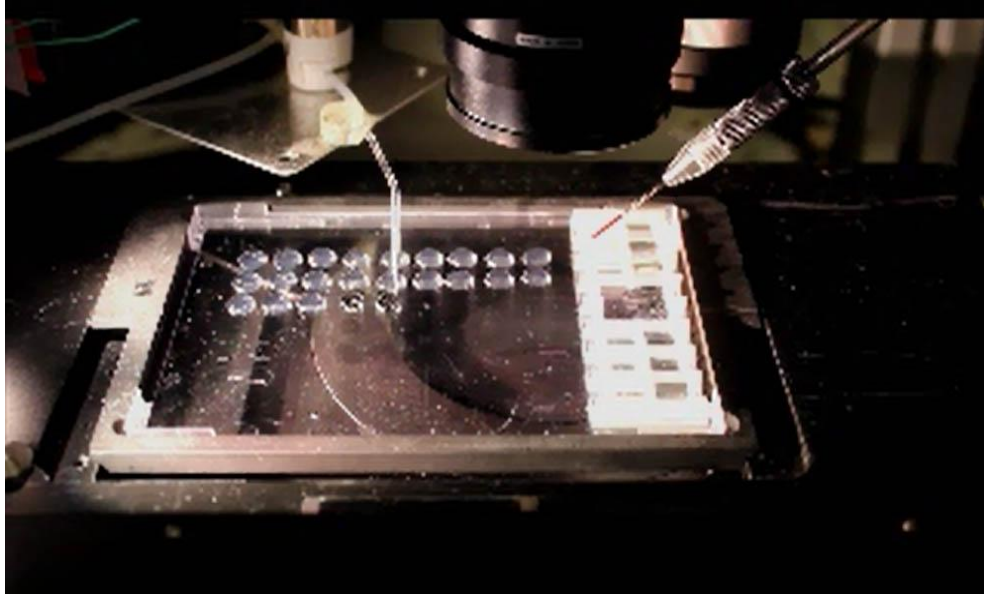

Movie S1. Dispensing single-larva-containing hydrogel droplets onto a hydrophobic substrate treated with arrays of hydrophilic spots to make the fish-array for high-throughput microinjections.

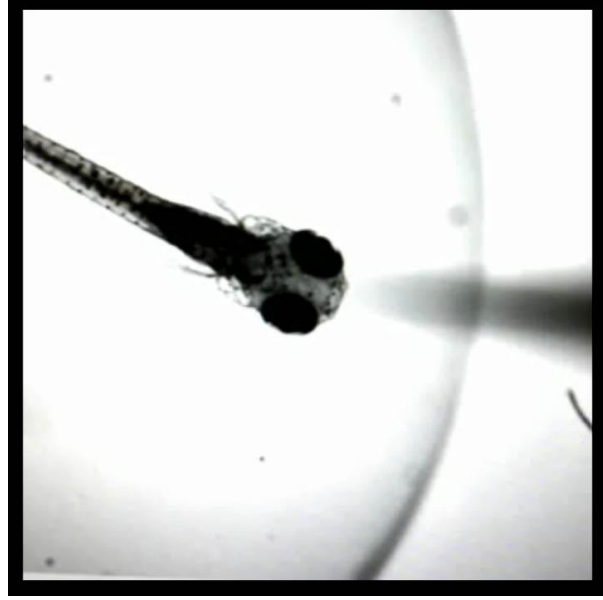

Movie S2. Identification and self-centering of the target tissue, the brain of a larva.

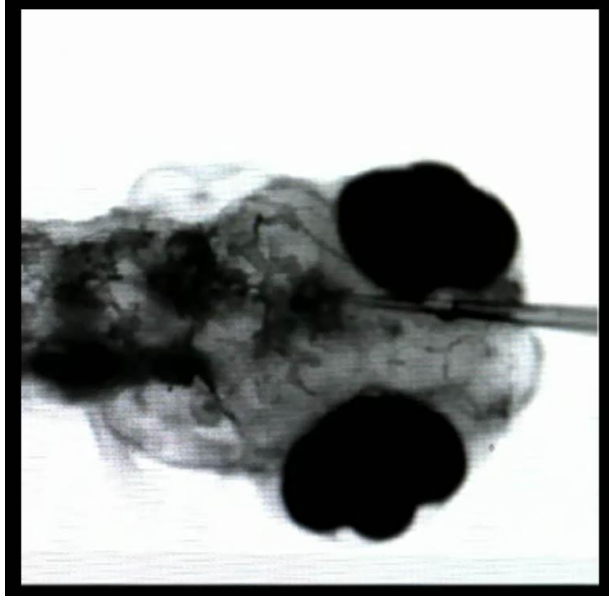

Movie S3. Automated microinjection of molecules into the brain ventricle of an immobilized larva within a hydrogel droplet.